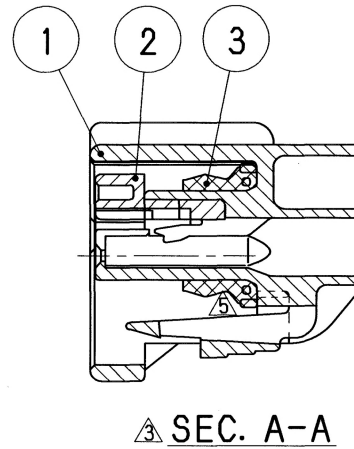
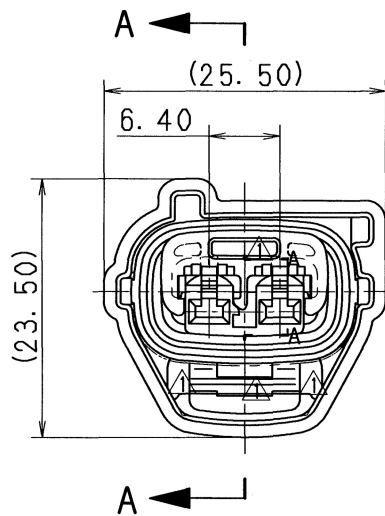


TABLE 1

SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY
7283-7023-10 ETC.	①	SEE TABLE 2	PBT	SEE TABLE 2	1
	②	7157-4103	PBT	NATURAL	1
	③	7137-2211-80	SILICONE RUBBER	RED IRON	1

TABLE 2

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	COLOR
△ 7283-7023	7183-7023	NATURAL
7283-7023-10	7183-7023-10	DARK GRAY
△ 7283-7023-30	7183-7023-30	BLACK
△ 7283-7023-40	7183-7023-40	LIGHT GRAY
△ 7283-7023-50	7183-7023-50	ORANGE
△ 7283-7023-60	7183-7023-60	GREEN
△ 7283-7023-80	7183-7023-80	BROWN
△ 7283-7023-90	7183-7023-90	BLUE

NOTES

1. APPLICABLE TERMINAL NO. : 7116-4025 ETC.
2. MATING PART NO. : 7282-7023-10 ETC.
- △ 3. APPLICABLE RUBBER STOPPER NO. : 7158-3006-90 ETC.

注記

1. 通用端子品番 : 7116-4025 ETC.
2. 嵌合相手品番 : 7282-7023-10 ETC.
- △ 3. 適用ゴム栓品番 : 7158-3006-90 ETC.

⑤	2008.05.16	CHANGED FORM ETC.	C08-Z358	S. S
④	03.08.27	CHANGED NAME & CORRECTION OF A CLERICAL ERROR	C03-X519	E. F
③	97.07.25	ADDED PART NO.	C97-M505	M. T
②	89.10.04	ADDED PART NO.	C89-M068	M. H
①	89.08.19	CHANGED FORM & RENEW	C89-L866	M. T
ET	89.02.22	NEW	C89-L380	T. M
	DATE	REVISION RECORD	NO.	CHKD
GENERAL TOLERANCE				
	10MAX	50MAX	100MAX	250MAX
A	±0.15	±0.2	±0.3	±0.5
B	±0.2	±0.3	±0.55	±0.95
C	±0.3	±0.5	±0.8	±1.4
SPECIFIED				
MASS				
g				

CUSTOMER		MATERIAL		TREAT.	
CUSTOMER PART NO.		SPEC.		& FIN.	
OFFICE		NAME		2.3II 2P SEALED CONNECTOR	
VENDOR		△		HOUSING FEMALE SUB ASSEMBLY	
VENDOR NO.		PART NO.		△ 7283-7023-10 ETC.	
DWG TYPE		CH. CODE		7283-7023-10:R	
DWG SOURCE		DWG NO.		YAZAKI CORPORATION	
DWG DATE		SET DWG NO.			
UNIT					
SCL					
ANGLE					
APPROVED		DESIGN			
CHECKED		DRAWN			
M. TSUJI					
J. GALLARES					
88.07.27					
2008/05/16					