


A

B

A

B

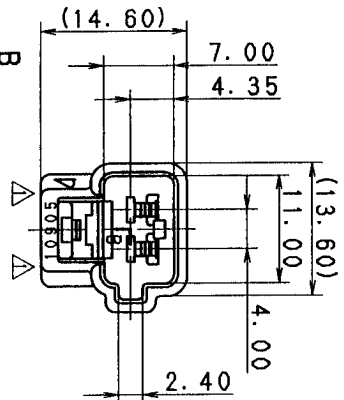

SEC. A-A

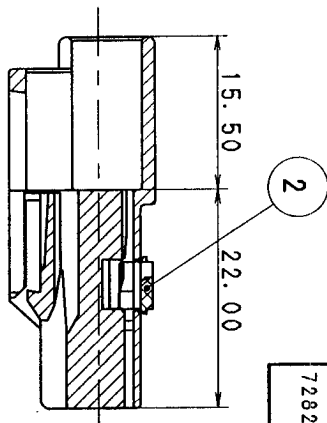


TABLE 1

SUB ASSEMBLY PART NO. AND CH. CODE		NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
7282-1028 ETC.		①	SEE TABLE 2	HPA	SEE TABLE 2	1
		②	7157-4091 (7B57-4091)	HPA	NATURAL	1

TABLE 2

SUB ASSEMBLY PART NO. AND CH. CODE		PART NO. AND CH. CODE	COLOR
7282-1028, B		7182-1028	NATURAL
7282-1028-10, B		7182-1028-10	DARK GRAY
7282-1028-30, B		7182-1028-30	BLACK
7282-1028-40, B		7182-1028-40	LIGHT GRAY
7282-1028-90, B		7182-1028-90	BLUE


注記

1. 嵌合端子品番: 7283-1028 ETC.
2. 適用端子品番: 7114-4020 ETC.
3. () 内品番はA/B回路及び特別電圧回路に使用すること。

NOTES

1. MATING PART NO.: 7283-1028 ETC.
2. APPLICABLE TERMINAL NO.: 7114-4020 ETC.
3. PART NUMBERS IN PARENTHESIS SHALL BE USED FOR AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS DESIGNATED FOR SPECIAL MONITOR.

SEC. B-B

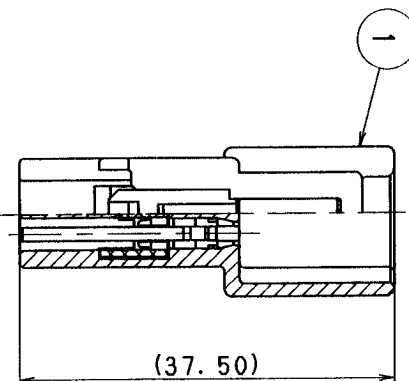

△	99.01.07	ELIMINATED COLOR NO.	C98-N177	T.M	CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.		MATL. SPEC.	SEE TABLE 1	TREAT. & FIN.
△	96.08.02	CHANGED FORM & CHANGED MATERIAL. 田	C96-M436	A.Y	OFFICE		TRIAL PART NO.		NAME		090II 2P CONNECTOR		
	90.05.24	NEW	C90-L550	H.Y	VENDOR				SUB ASSEMBLY MALE				
LET	DATE	REVISION RECORD		NO.	CHKD	VENDOR NO.							
GENERAL TOLERANCE													
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	90.05.23	mm	1/2	3
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	加藤 山梨 泰 藤	Y. OHTA	KANAZAWA	カノウ		
SPECIFIED						MASS		99.1.15 99.1.14 99.01.07 88.12.19 99.01.07					
YAZAKI CORPORATION													

090II 2P CONNECTOR
SUB ASSEMBLY MALE

7282-1028 ETC. (7C82-1028)
7282-1028:R

YAZAKI CORPORATION