



1	2	3										13	14		
↓			↓				↓		↓			↓		↓	
系列	代码	产品直径		代码	产品高度		代码	额定电压(V)	代码	静电容量(μF)	代码	容量范围	代码	附属码(国内)	
L3M	L3M	3.5	F	3.95	039	6.3	0J	0.1	R10	±20%	M	O	引线30F/35F		
LMM	LMM	3.55	W	4.5	045	10	1A	0.22	R22	±10%	K	H	引线33F/38F		
LK7	LK7	4	A	5	050	16	1C	0.33	R33	0%~+10%	R	F	引线22F/27F		
LK	OLK	4.5	G	5.4	054	20	1D	0.47	R47	0%~-10%	T	A	切直脚A图		
KCX	KCX	5	B	5.7	057	25	1E	0.56	R56	-10%~+20%	V	B	切脚成型B图		
KCG	KCG	5.5	H	5.8	058	27	1N	0.68	R68	-20%~+5%	L	C	切脚成型C图		
KCM	KCM	6.3	C	6.5	065	35	1V	0.82	R82	-10%~+5%	G	D	切脚成型D图		
LKF	LKF	7	T	7	070	40	1G	1.0	1R0	-10%~+15%	H	E	切脚成型E图		
LKM	LKM	8	D	7.7	077	50	1H	2.2	2R2	0%~+40%	I	Q	切脚折弯90° F图A型(右)		
LKG	LKG	10	E	8	080	63	1J	3.3	3R3	±15%	J	P	切脚折弯90° F图B型(左)		
LKZ	LKZ	12.5	L	8.5	085	70	1L	4.7	4R7	-20%~+50%	A	X	切脚成型G图		
LLK	LLK	13	S	9	090	80	1K	5.6	5R6	-5%~-20%	B	g	切脚双折弯90° H图A型(右)		
LKX	LKX	14.5	U	9.5	095	90	1F	6.8	6R8	-5%~+20%	E	f	切脚双折弯90° H图B型(左)		
LKL	LKL	16	I	10	100	100	2A	8.2	8R2	-15%~+5%	C	K	编带A图		
LKL(R)	LKL(R)	18	J	10.5	105	110	2R	10	100	-15%~-5%	D	J	编带B图		
LKJ	LKJ	20	N	11	110	120	2K	22	220	0%~+20%	F	V	SMD		
LKD	LKD	22	K	11.5	115	125	2B	33	330	0%~+15%	N	TM	涂膜		
LED	LED	25	M	12	120	130	1Q	47	470	-5%~+15%	W	CG	车规		
LKE	LKE			12.5	125	140	2Q	56	560	-20%~+0%	S		附属码(IND)		
V4M	V4M			13	130	160	2C	68	680	-20%~+10%	P		2	引线30F/35F	
V3MC	V3MC			13.5	135	180	2M	82	820	0%~+5%	Q		3	引线33F/38F	
V3M	V3M			14	140	200	2D	100	101				4	切直脚A图	
VMM	VMM			14.5	145	250	2E	220	221				5	切脚成型B图	
VK7	VK7			15	150	270	2N	330	331				6	切脚成型C图	
VKO	VKO			16	160	300	2S	470	471				7	切脚成型D图	
VKM	VKM			16.5	165	315	2F	560	561				8	切脚成型E图	
VKG	VKG			17	170	320	1U	680	681				9	引线22F/27F	
VKL	VKL			18	180	330	2U	820	821				M	编带A图	
VKL(R)	VKL(R)			19	190	350	2V	1000	102				N	编带B图	
				20	200	375	2P	1500	152						
				21	210	400	2G	2200	222						
				22	220	420	2T	3300	332						
				23	230	450	2W	4700	472						
				25	250	480	2L	6800	682						
				28	280	500	2H	10000	103						
				30	300	550	2I	22000	223						
				31.5	315	600	2J	33000	333						
				32	320	630	2Y								
				35.5	355	650	2X								
				36	360										
				40	400										
				41.5	415										
				45	450										
				50	500										



LKL(R)


- ◆耐高温 低阻抗 高可靠性产品
- ◆135℃环境下2000小时
- ◆符合AEC-Q200 RoHS指令对应



主要技术参数


项目	特性						
使用温度范围	- 55~+135℃						
标称电压范围	10~50V						
容量允许偏差	±20% (25±2℃ 120Hz)						
漏电流(μA)	10~50WV I≤0.01CV or 3μA 取大者 C:标称容量(μF) V:额定电压(V) 2分钟读数						
损耗角正切值 (25±2℃ 120Hz)	额定电压(V)	10	16	25	35	50	
	tg δ	0.30	0.26	0.22	0.20	0.20	
	标称容量超过1000μF者，则每增加1000μF，损耗角正切值增加0.02						
温度特性 (120Hz)	额定电压(V)		10	16	25	35	50
	阻抗比Z(− 40℃)/Z(20℃)		12	8	6	4	4
耐久性	在135℃烘箱中，施加额定电压持续至规定时间后，置于常温16小时后测试，测试温度25±2℃，电容器的性能应满足如下要求						
	容量变化率			在初始值的±30%以内			
	损耗角正切值			在规定值的300%以下			
	漏电流			在规定值以下			
	负荷寿命			2000小时			
高温储存	在105℃下，储存1000小时，置于常温16小时后测试，测试温度25±2℃，电容器的性能应满足如下要求						
	容量变化率			在初始值的±30%以内			
	损耗角正切值			在规定值的300%以下			
	漏电流			在规定值的200%以下			

产品尺寸图 (单位: mm)

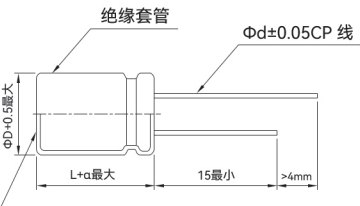

安全阀

备注: ≥Φ6.3 产品有安全阀



L=9	α=1.0
L≤16	α=1.5
L>16	α=2.0

D	6.3	8	10	12.5	14.5	16	18
d	0.5(0.45)	0.6(0.5)	0.6	0.7	0.8	0.8	0.8
F	2.5	3.5	5.0	5.0	7.5	7.5	7.5

频率修正系数

频率(Hz)	50	120	1K	≥10K
系数	0.35	0.50	0.83	1.00



LKL(R)

■ 标准品一览表

电压(V)	10			16			25			35		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 135°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 135°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 135°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 135°C 100kHz)
47										6.3×9	0.5	197
47										8×9	0.4	270
68										8×9	0.4	270
100				6.3×9	0.5	197	8×9	0.4	270	6.3×9	0.5	197
100				8×9	0.4	270				8×9	0.4	270
220	8×9	0.4	270	8×9	0.4	270	10×9	0.3	500	10×9	0.3	500
330	8×9	0.4	270	10×9	0.3	500	10×9	0.3	500			
330	10×9	0.3	500									
470	10×9	0.3	500	10×9	0.3	500				12.5×13	0.14	750
560										12.5×13	0.14	750
680										12.5×13	0.14	750
820							12.5×13	0.14	750	16×16	0.1	1200
1000							12.5×13	0.14	750	16×16	0.1	1200
1200							16×16	0.1	1200	18×16	0.1	1400
1500							16×16	0.1	1200	16×20	0.08	1900
1500										18×16	0.1	1400
1800							16×16	0.1	1200	18×20	0.07	2200
2200							18×16	0.1	1400	18×20	0.07	2200
2700							16×20	0.08	1900			
3300							18×20	0.07	2200			

电压(V)	50		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 135°C 100kHz)
47	8×9	0.5	270
100	10×9	0.4	500
390	12.5×13	0.18	750
470	16×16	0.14	1000
560	16×16	0.14	1000
680	18×16	0.14	1200
820	18×16	0.14	1200
1000	16×20	0.1	1600
1200	18×20	0.08	1900