

CT3.640.025

1.材料和电镀\Materials and Finishes:





- 外壳\Body - 黄铜\Brass,镀金\Gold plating
- 内导体>Contact - 铍铜\Beryllium copper,镀金\Gold plating
- 绝缘体\Insulator - 聚四氟乙烯\Teflon,本色\Natural
- 螺母\Nut - 黄铜\Brass,镀金\Gold plating
- 齿型片\Lock washer - 磷青铜\Phosphor copper,镀金\Gold plating
- 密封垫\Gasket - 硅橡胶\VQM,红色\Red

2.电气性能\Electrical:

- A.特性阻抗\Impedance:50 Ohm
- B.使用频率\Frequency range:DC-6GHz
- C.介质耐压\Breakdown voltage:1000V rms
- D.绝缘电阻\Insulation resistance:5000 MΩ

3.机械性能\Mechanical:

- A.使用寿命\Durability:500 cycles

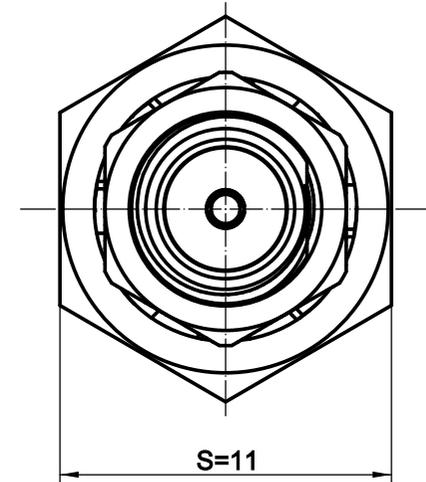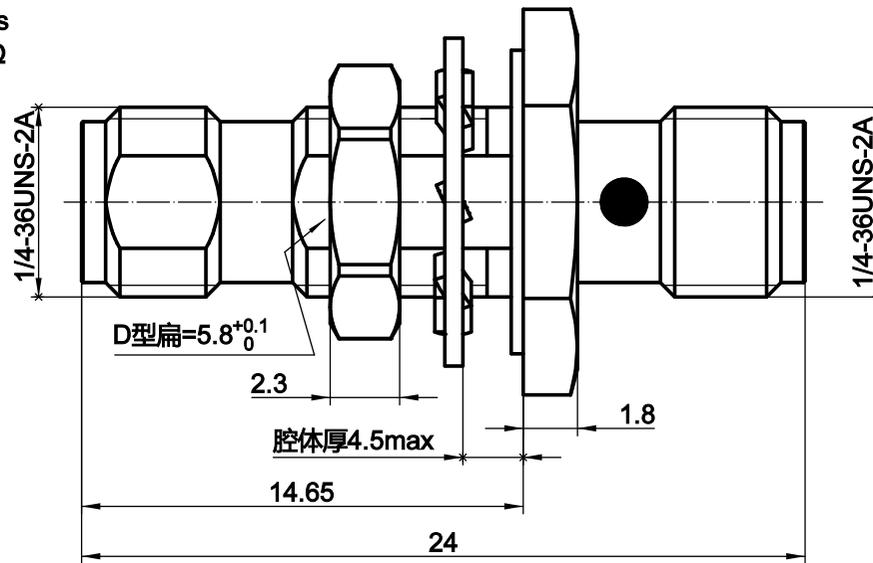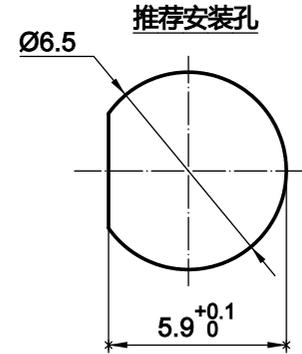

客户信息	料号		
	规格		
设计	JAT	2023.08.05	
审核	DF	2023.08.05	
批准	DF	2023.08.05	

版次	比例	4:1
第一角法		
1.未注公差按ISO2768-1(m) 2.去尽毛刺C0.1max 3.各圆同轴度Ø0.1max 4.*尺寸为重要尺寸		
*尺寸为重要尺寸		单位 mm

料号	CT3.640.025
规格	SMA-KKY
名称	SMA母头双通穿墙外防水
深圳成泰电子有限公司 www.cntitle.net	