

● SPECIFICATION



Model	XT114 Series
Frequency range	24.000 ~ 96.000 MHz
Frequency tolerance	$\pm 10 \sim \pm 30$ ppm (at 25°C)
Frequency stability	$\pm 10 \sim \pm 30$ ppm (ref. to 25°C)
Operation temperature	- 40°C ~ +85°C or specify
Storage temperature	- 55°C ~ + 125°C
Load capacitance	8 to 32 pF or specify
Drive Level	10 uW (typ) , 100 uW (max)
Series resistance	See below
Shunt capacitance	3 pF (max)
Aging	± 3 ppm / Year (max)

● EQUIVALENT SERIES RESISTANCE


Frequency MHz	Model	ESR
24.000-29.999	Fundamental	120 Ω (max)
30.000-39.999	Fundamental	100 Ω (max)
40.000-96.000	Fundamental	80 Ω (max)

● DIMENSIONS (mm)


★ Top View



★ Bottom View




★ Recommended Land Pattern



UNIT:mm

● REEL PACKING(mm)

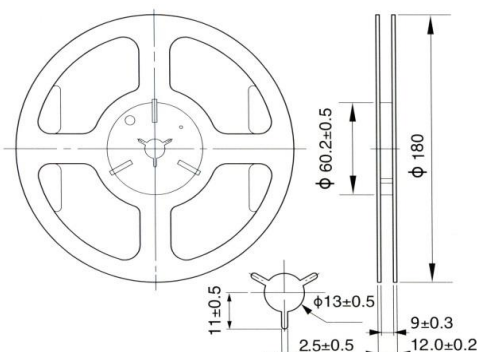

* 3000PCS/Reel

● TAPE SPECIFICATION(mm)

