


TYPE C/2

Female connector – straight and angled – 16, 32 and 48 positions

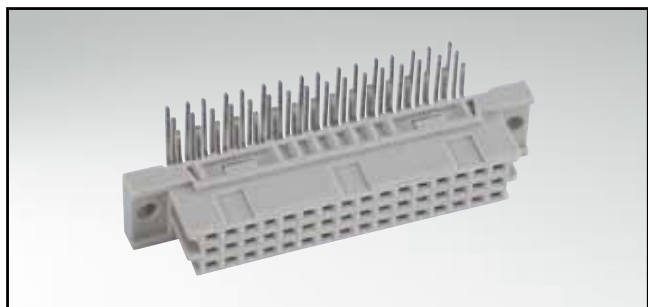


RoHS compliant

DESCRIPTION



- Solder pin, solder lug and wire wrap
- Quality class 3 (also available in quality class 2 or 1)
- Special assembly on request

PRODUCT DRAWING


PCB-hole pattern

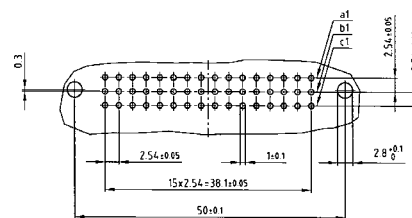


Panel cutout

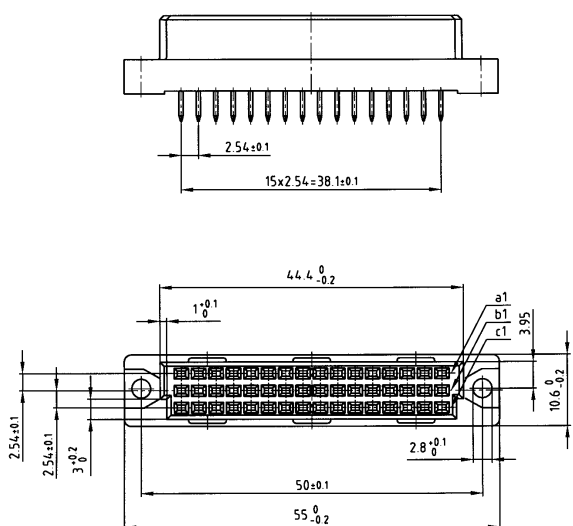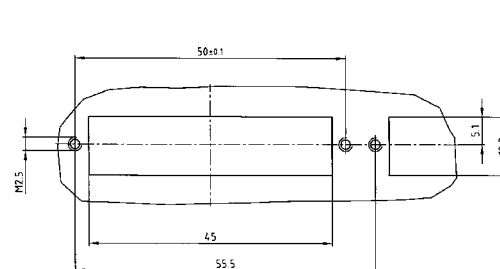


Wire Wrap




Solder pin straight 2.5 mm




Solder pin straight 4 mm




Solder lug



Solder pin angled



Solder pin straight 2.5 mm with clip



ORDER DATA

(Dim. = mm)

No. of Pos.	Row	• = contact, + = no contact					Wire Wrap	Solder pin straight 2.5 mm	Solder pin straight 4 mm	Solder lug	Solder pin angled	Solder pin straight 2.5 mm with clip
		Pos.	1	2	3	4	5					
16	a		•	•	•	•	•					
	b		+	+	+	+	+					
	c		+	+	+	+	+					
16	a		+	•	+	•	+					
	b		+	+	+	+	+					
	c		+	•	+	•	+					
32	a		•	•	•	•	•					
	b		+	+	+	+	+					
	c		•	•	•	•	•					
48	a		•	•	•	•	•					
	b		•	•	•	•	•					
	c		•	•	•	•	•					

Clip for hole diameter 2.8 + 0.1 mm, PCB thickness = 1.6 mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122A10789X](#) [122A10579X](#) [122A10819X](#) [122A13299X](#) [122A10639X](#)