

TYPE C

Female connector – straight and angled – 32, 64 and 96 positions





RoHS compliant

DESCRIPTION



- Solder pin, solder lug and wire wrap
- Quality class 3 (also available in quality class 2 or 1)
- Special assembly on request

PRODUCT DRAWING


PCB-hole pattern

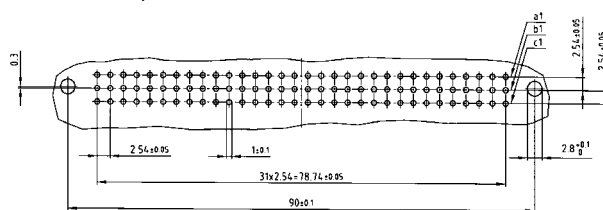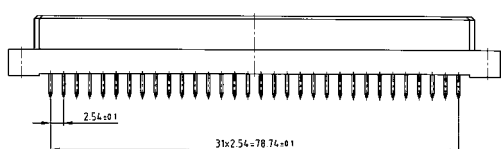


Panel cutout

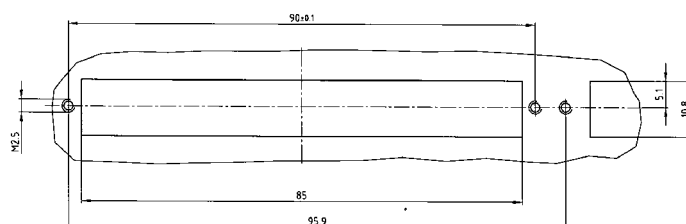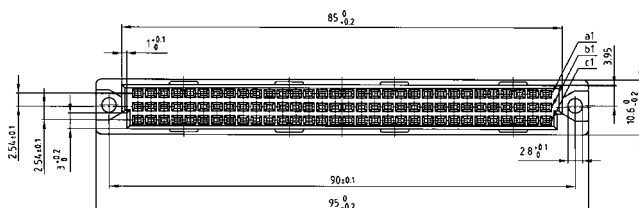


Wire Wrap




Solder pin straight 2.5 mm




Solder pin straight 4 mm




Solder lug



Solder pin angled



Solder pin straight 2.5 mm with clip



ORDER DATA

(Dim. = mm)

No. of Pos.	Row	• = contact, + = no contact					Wire Wrap	Solder pin straight 2.5 mm	Solder pin straight 4 mm	Solder lug	Solder pin angled	Solder pin straight 2.5 mm with clip
		Pos.	1	2	3	4	5					
32	a		•	•	•	•	•					
	b		+	+	+	+	+					
	c		+	+	+	+	+					
32	a		+	•	+	•	+					
	b		+	+	+	+	+					
	c		+	•	+	•	+					
64	a		•	•	•	•	•					
	b		+	+	+	+	+					
	c		•	•	•	•	•					
96	a		•	•	•	•	•					
	b		•	•	•	•	•					
	c		•	•	•	•	•					

Clip for hole diameter 2.8 ± 0.1 mm, PCB thickness = 1.6 mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122A10249X](#) [122A10379X](#) [122A10199X](#) [122A10369X](#) [122A10219X](#) [122A10229X](#) [122A10179X](#) [122A10169X](#)
[122A13249X](#) [122A10279X](#) [122A13259X](#) [122A13289X](#) [122A10269X](#) [122A10209X](#)