













Female connector – straight – 32 and 48 positions



PRODUCT DRAWING

- Solder pin, wire wrap and solder lug
- Quality class 3 (also available in quality class 2 or 1)
- Special assembly on request

PRODUCT DRAWING

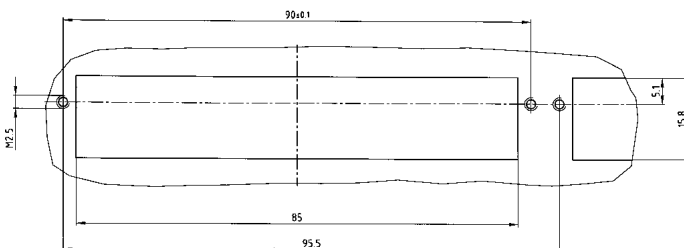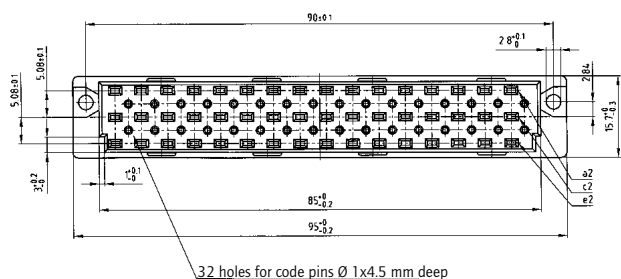

No. of Pos.	Row	• = contact, + = no contact				Solder pin straight 4.6 mm Ø 0.6 mm	Solder pin straight 4.0 mm Ø 1 mm	Solder lug	Wire Wrap	
		Pos.	2	4	6					...
32	a		•	•	•	122 A 13099 X	122 A 13129 X	122 A 13149 X	122 A 13169 X	
	c		•	•	•					
	e		+	+	+					+
32	a		•	•	•	122 A 13109 X	122 A 13139 X	122 A 13159 X	122 A 13179 X	
	c		+	+	+					+
	e		•	•	•					•
48	a		•	•	•	122 A 13119 X	122 A 11619 X	122 A 11629 X	122 A 11609 X	
	c		•	•	•					•
	e		•	•	•					•

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122A11619X](#) [122A13129X](#) [122A13139X](#)