
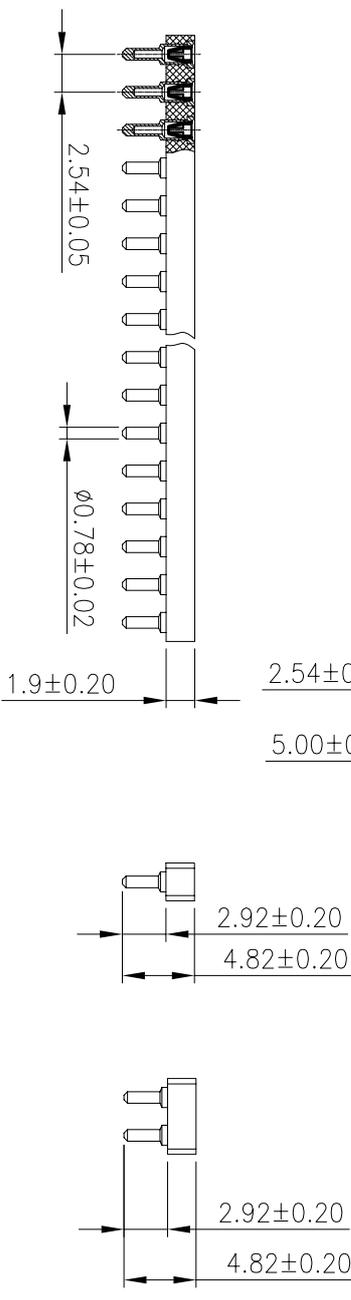
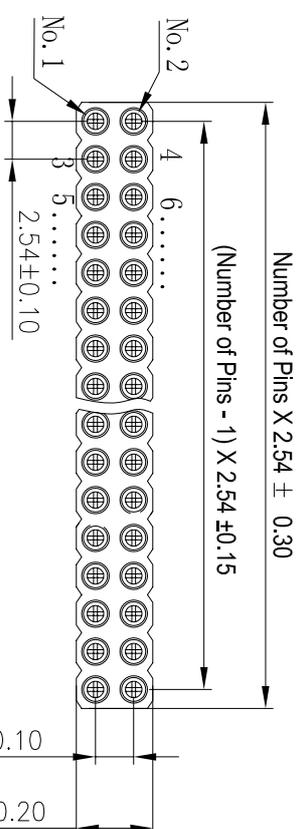


Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-0
 Sleeve: Brass
 Contact clip(4/6 finger): Beryllium copper(C17200)
 Accepted pin: $\varnothing 0.38$ to 0.56mm
 Forces: (polished steel gauge $\varnothing 0.43\text{mm}$)
 --Insertion 2 N typ
 --Withdrawal 1 N typ
 Mechanical life: min500 cycles
 Rated current: 3A
 Contact resistance: max 10m Ω
 Dielectric resistance: Min 1000M Ω
 Operating temperature: -40 $^{\circ}\text{C}$ to +105 $^{\circ}\text{C}$
 Soldering temperature: 260 $^{\circ}\text{C}$, 10s max

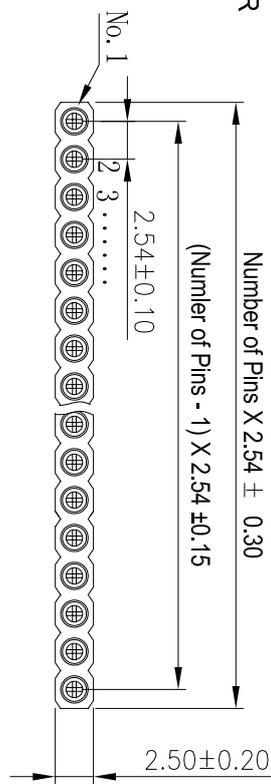

料号 : FH-00308

深圳市连盛精密连接器有限公司

OPERATION		DRAW		YTYuSheng		SCALE		FIT	
X.X		±0.30		12.08.08		UNIT		mm	
X.XX		±0.20				SIZE		A4	
X.XXX		±0.10				SHEET		1/1	
Angle		±3°				PROJ.		◆	
DIM		TOL		APPROVE		PART NO.		FH-00308	
CHANGE						TITLE:		2.54X1.9圆孔排母 1x21p	
REV		DATE		MODIFICATION DESCRIPTION					
A0		2012.08.08		NEW DRAWING					
1		2		3		4		5	