

承认书

Customer: _____

Customer P/N: _____

Zhongchi P/N: **ZC-AN860-SP231108** _____

Description : **860-915MHz Antenna** _____

Zhongchi Checked By:	Customer Approved By:

承认书项目表

NO.	内 容 (Contents)	页 数 (Number of Page)	页 码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	工程成品图 (Drawing)	1	3
4	电性测试报告 (Test Reports)	1	4
5	S参数测试 (S Parameter)	1	5
6	增益测试 (Gain Test)	1	6
7	增益测试 (Gain Test)	1	7
8		1	8
9		1	9
10	-	-	-
11	-	-	-
12	-	-	-



RoHS

Compatible

CUSTOMER

PART NO

REV.




DESCRIPTION

Initial release

DATE

2022-06-30

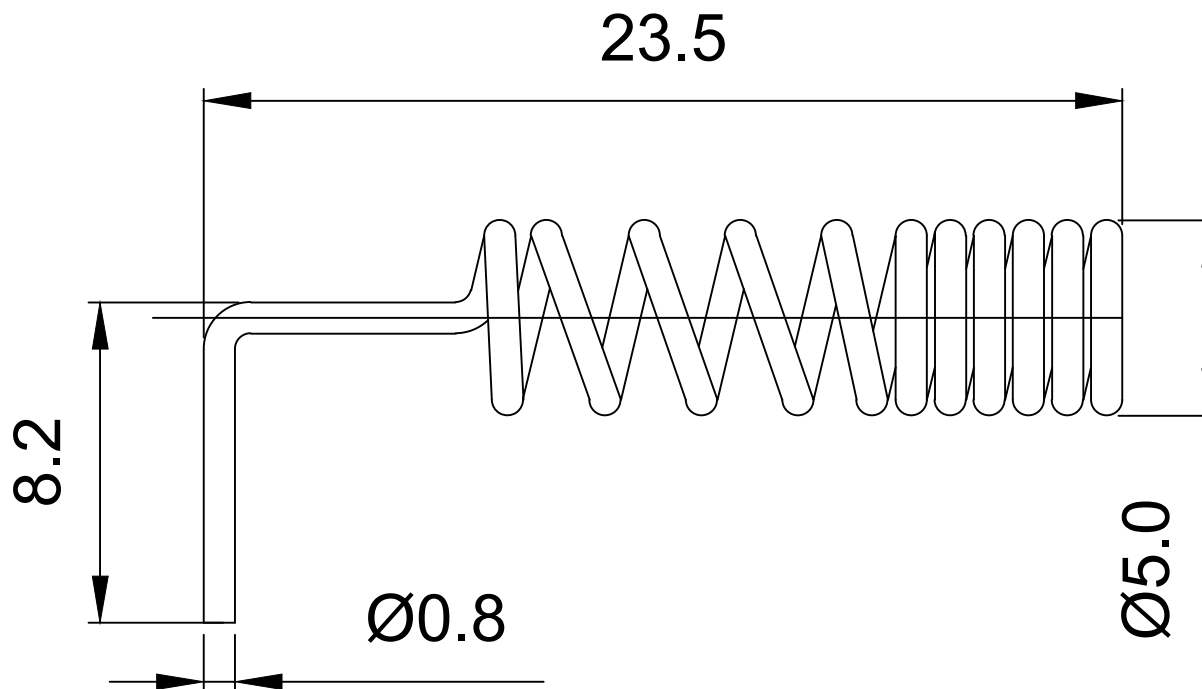

備注:

- 1.材質:黃銅, 線徑0.8mm, 圈數11.25圈
- 2.顏色/表面處理: 焊盤抗氧化處理,
- 3.尺寸: 帶* 為重點尺寸。
- 4.公差: 未標注公差參照標準公差。



Dongguan Zhongchi Electronic Technology Co., Ltd

Tel 0769-81238620

Fax:0769-81238620

PART NAME: 860-915MHz Antenna


PART NO.:ZC-AN860-SP231108

DATE: 2022-06-30

APPROVED BY

CHECKED BY

DESIGNED BY



Tolerance

UNITS: mm

X.X ±0.50

SCALE: 1/1

X.XX±0.15

REVISION: A

X° ±3°

Huang Wang Chun

电 性 测 试 报 告

Test Reports



Electrical Properties	
Frequency	860-915MHz
Impedance	50 Ohm Nominal
V.S.W.R	>=2.0
Return Loss	-6 dB Max
Radiation	Omni-directional
Gain (Peak)	2.5 dBi
Cable Loss	3.0 dB / m
Polarization	Linear, Vertical
Admitted Power	2 W
Connector	
Physical Properties	
Antenna Material	弹簧
Cable Type	
Operating Temp.	-40~ +85℃
Storage Temp.	-40 ~ +85 ℃



S 参数测试

S Parameter Test

Agilent E5071B

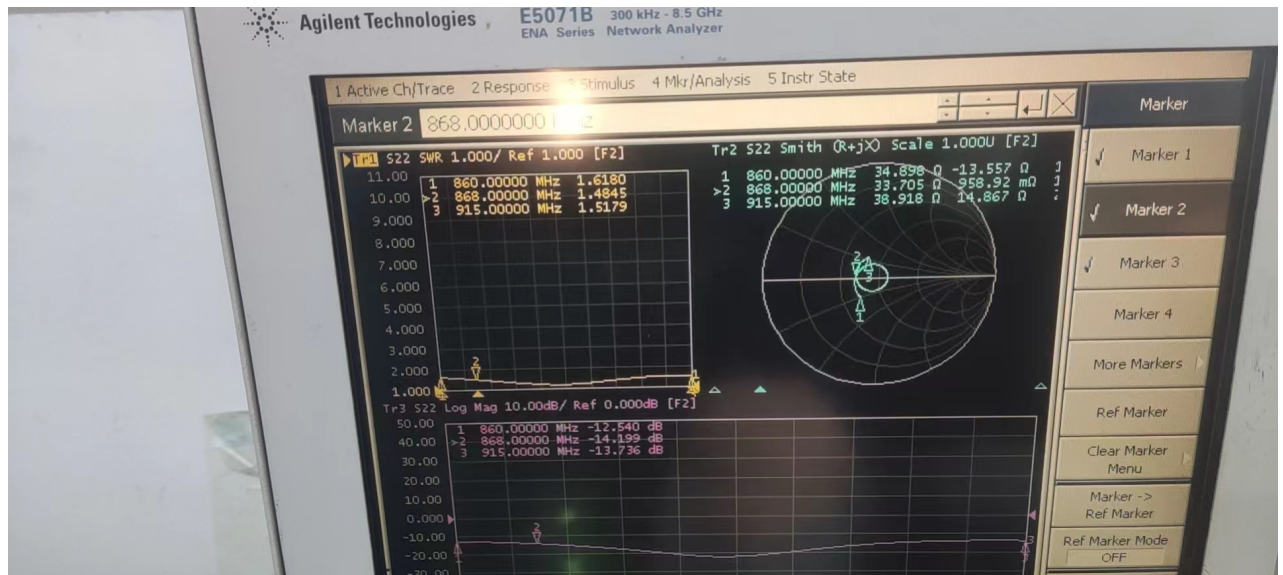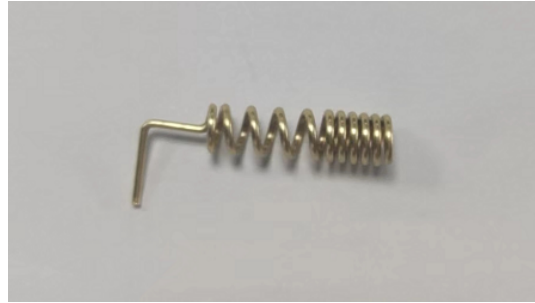

增益测试

Gain Test

*Antenna
Radiation
Pattern
VS
Gain*

