

RoHS

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass





Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

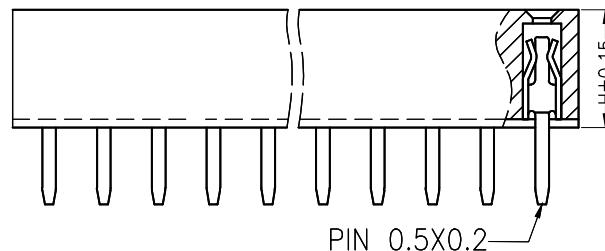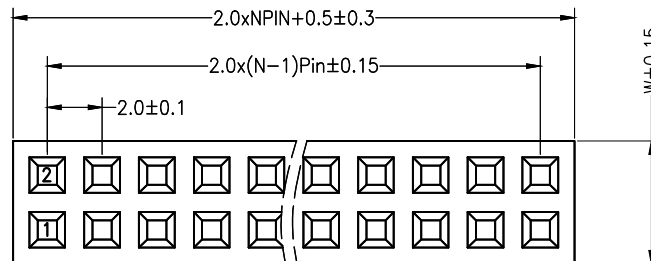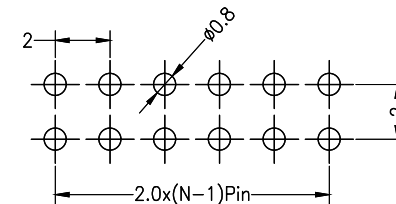

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001		2.4		4.3	4.0
002					

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

◆

深圳市连盛精密连接器有限公司

PART NO.

1020200016

TITLE:

2.0FH H=4.3 W=4.5 2*4P DIP PC2.4 U型
AU1U 青铜 PA6T

A0 2012.07.23 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE