
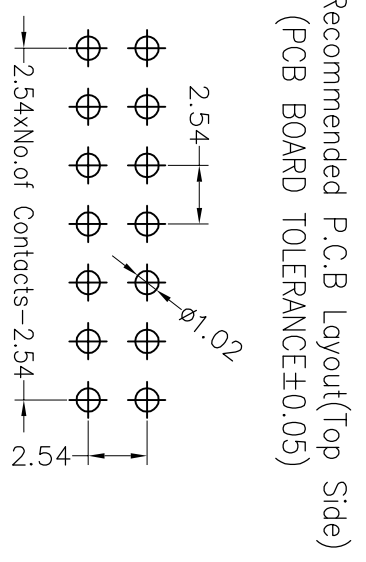


1	2	3	4	5	6	7	8	9
RoHS								

G	SPECIFICATIONS							
	Rated Current:3.0AMP							
F	Contact Resistance:20mΩ Max							
	Withstand Voltage:1000V AC/DC							
F	Insulation Resistance:1000MΩ Min							
	Operation Temperature:−40°c to +105°c							
E	Contact Material:Brass							
	Contact Plating:Au Over Ni							
E	Insulator Material:Polyester(UL94V−0)							
	Standard: PA6T							
E	Max.Processing Temp: 230°C for 30−60 seconds							
	(260°C for 10 seconds)							

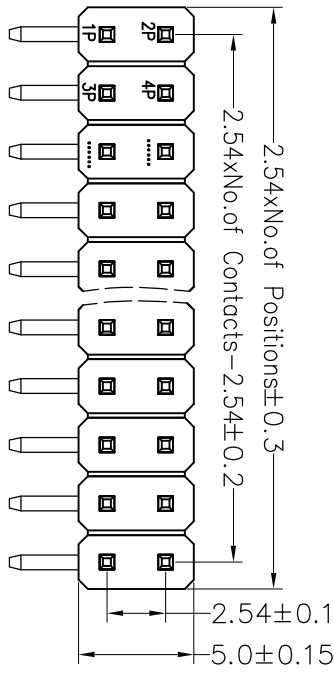

D								
C								

B								

Dimension antitheses list					
ITEM	PA	PC	PB	L短	L长
Standard	6.00	3.00	6.90	13.80	18.80
Alternate					

深圳市连盛精密连接器有限公司									
				SCALE		FIT			
				UNIT		mm			
				SIZE		A4			
				SHEET		1/1			
				PROJ.				7	
								8	
								9	