

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance: 20m Ω Max

Withstand Voltage:500V AC/DC

Insulation Resistance: 1000M Ω Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass



Contact Plating: Au Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds



(260°C for 10 seconds)

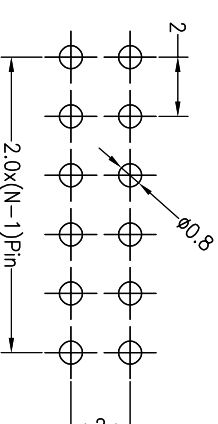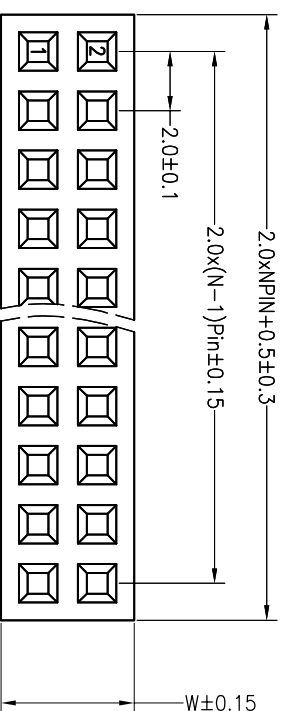

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

(PCB BOARD TOLERANCE $\pm$ 0.05)

Ordering Information

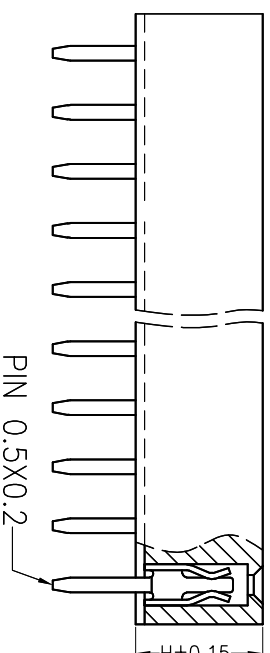[illegible]

Dimension antiheses list					
ITEM	PB	PC	PW	H	W
001		2.4		4.3	4.0
002					

				OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司		
				X.X	±0.30		UNIT	mm					
				X.XX	±0.20	CHECK			SIZE	A4			
				X.XXX	±0.10		SHEET	1/1					
A0	2012.07.23	NEW DRAWING		Angle	±3°	APPROVE			PROJ.				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							2.0FH H=4.3 W=4.0 2*40P DIP PCZ.4 U型 AU1U 青銅 PA6T	

深圳市连盛精密连接器有限公司

PART NO.	1020200435
----------	------------

TITLE: 2.0FH H=4.3 W=4.0 2*40P DIP PC2.4 U型

AU1U 青銅 PA6T