

RoHS

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:−40°c to +105°c



Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V−0)

Standard: PA6T



Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

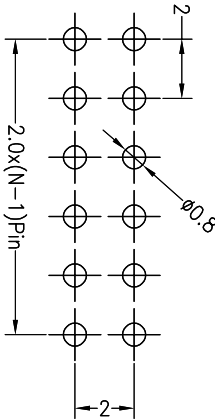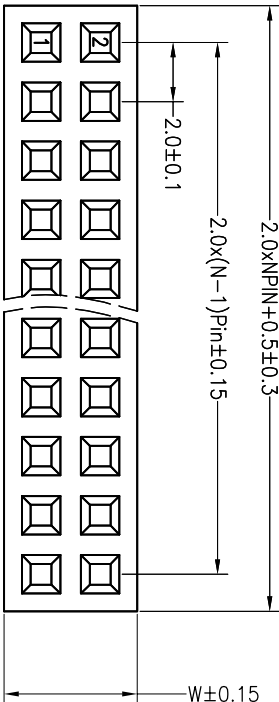

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

F	X	X	X	XX	X	XX	X	XXX
产品规格	额定电流	额定电压	接触材料	接触镀层	绝缘材料	绝缘等级	绝缘厚度	序列号
1-1.5A	1-1.5A	1-1.5A	1-1.5A	1-1.5A	1-1.5A	1-1.5A	1-1.5A	
2-2.5A	2-2.5A	2-2.5A	2-2.5A	2-2.5A	2-2.5A	2-2.5A	2-2.5A	
3-3.5A	3-3.5A	3-3.5A	3-3.5A	3-3.5A	3-3.5A	3-3.5A	3-3.5A	
4-4.5A	4-4.5A	4-4.5A	4-4.5A	4-4.5A	4-4.5A	4-4.5A	4-4.5A	
5-5.5A	5-5.5A	5-5.5A	5-5.5A	5-5.5A	5-5.5A	5-5.5A	5-5.5A	
6-6.5A	6-6.5A	6-6.5A	6-6.5A	6-6.5A	6-6.5A	6-6.5A	6-6.5A	
7-7.5A	7-7.5A	7-7.5A	7-7.5A	7-7.5A	7-7.5A	7-7.5A	7-7.5A	
8-8.5A	8-8.5A	8-8.5A	8-8.5A	8-8.5A	8-8.5A	8-8.5A	8-8.5A	
9-9.5A	9-9.5A	9-9.5A	9-9.5A	9-9.5A	9-9.5A	9-9.5A	9-9.5A	
10-10.5A	10-10.5A	10-10.5A	10-10.5A	10-10.5A	10-10.5A	10-10.5A	10-10.5A	
11-11.5A	11-11.5A	11-11.5A	11-11.5A	11-11.5A	11-11.5A	11-11.5A	11-11.5A	
12-12.5A	12-12.5A	12-12.5A	12-12.5A	12-12.5A	12-12.5A	12-12.5A	12-12.5A	
13-13.5A	13-13.5A	13-13.5A	13-13.5A	13-13.5A	13-13.5A	13-13.5A	13-13.5A	
14-14.5A	14-14.5A	14-14.5A	14-14.5A	14-14.5A	14-14.5A	14-14.5A	14-14.5A	
15-15.5A	15-15.5A	15-15.5A	15-15.5A	15-15.5A	15-15.5A	15-15.5A	15-15.5A	
16-16.5A	16-16.5A	16-16.5A	16-16.5A	16-16.5A	16-16.5A	16-16.5A	16-16.5A	
17-17.5A	17-17.5A	17-17.5A	17-17.5A	17-17.5A	17-17.5A	17-17.5A	17-17.5A	
18-18.5A	18-18.5A	18-18.5A	18-18.5A	18-18.5A	18-18.5A	18-18.5A	18-18.5A	
19-19.5A	19-19.5A	19-19.5A	19-19.5A	19-19.5A	19-19.5A	19-19.5A	19-19.5A	
20-20.5A	20-20.5A	20-20.5A	20-20.5A	20-20.5A	20-20.5A	20-20.5A	20-20.5A	
21-21.5A	21-21.5A	21-21.5A	21-21.5A	21-21.5A	21-21.5A	21-21.5A	21-21.5A	
22-22.5A	22-22.5A	22-22.5A	22-22.5A	22-22.5A	22-22.5A	22-22.5A	22-22.5A	
23-23.5A	23-23.5A	23-23.5A	23-23.5A	23-23.5A	23-23.5A	23-23.5A	23-23.5A	
24-24.5A	24-24.5A	24-24.5A	24-24.5A	24-24.5A	24-24.5A	24-24.5A	24-24.5A	
25-25.5A	25-25.5A	25-25.5A	25-25.5A	25-25.5A	25-25.5A	25-25.5A	25-25.5A	
26-26.5A	26-26.5A	26-26.5A	26-26.5A	26-26.5A	26-26.5A	26-26.5A	26-26.5A	
27-27.5A	27-27.5A	27-27.5A	27-27.5A	27-27.5A	27-27.5A	27-27.5A	27-27.5A	
28-28.5A	28-28.5A	28-28.5A	28-28.5A	28-28.5A	28-28.5A	28-28.5A	28-28.5A	
29-29.5A	29-29.5A	29-29.5A	29-29.5A	29-29.5A	29-29.5A	29-29.5A	29-29.5A	
30-30.5A	30-30.5A	30-30.5A	30-30.5A	30-30.5A	30-30.5A	30-30.5A	30-30.5A	
31-31.5A	31-31.5A	31-31.5A	31-31.5A	31-31.5A	31-31.5A	31-31.5A	31-31.5A	
32-32.5A	32-32.5A	32-32.5A	32-32.5A	32-32.5A	32-32.5A	32-32.5A	32-32.5A	
33-33.5A	33-33.5A	33-33.5A	33-33.5A	33-33.5A	33-33.5A	33-33.5A	33-33.5A	
34-34.5A	34-34.5A	34-34.5A	34-34.5A	34-34.5A	34-34.5A	34-34.5A	34-34.5A	
35-35.5A	35-35.5A	35-35.5A	35-35.5A	35-35.5A	35-35.5A	35-35.5A	35-35.5A	
36-36.5A	36-36.5A	36-36.5A	36-36.5A	36-36.5A	36-36.5A	36-36.5A	36-36.5A	
37-37.5A	37-37.5A	37-37.5A	37-37.5A	37-37.5A	37-37.5A	37-37.5A	37-37.5A	
38-38.5A	38-38.5A	38-38.5A	38-38.5A	38-38.5A	38-38.5A	38-38.5A	38-38.5A	
39-39.5A	39-39.5A	39-39.5A	39-39.5A	39-39.5A	39-39.5A	39-39.5A	39-39.5A	
40-40.5A	40-40.5A	40-40.5A	40-40.5A	40-40.5A	40-40.5A	40-40.5A	40-40.5A	
41-41.5A	41-41.5A	41-41.5A	41-41.5A	41-41.5A	41-41.5A	41-41.5A	41-41.5A	
42-42.5A	42-42.5A	42-42.5A	42-42.5A	42-42.5A	42-42.5A	42-42.5A	42-42.5A	
43-43.5A	43-43.5A	43-43.5A	43-43.5A	43-43.5A	43-43.5A	43-43.5A	43-43.5A	
44-44.5A	44-44.5A	44-44.5A	44-44.5A	44-44.5A	44-44.5A	44-44.5A	44-44.5A	
45-45.5A	45-45.5A	45-45.5A	45-45.5A	45-45.5A	45-45.5A	45-45.5A	45-45.5A	
46-46.5A	46-46.5A	46-46.5A	46-46.5A	46-46.5A	46-46.5A	46-46.5A	46-46.5A	
47-47.5A	47-47.5A	47-47.5A	47-47.5A	47-47.5A	47-47.5A	47-47.5A	47-47.5A	
48-48.5A	48-48.5A	48-48.5A	48-48.5A	48-48.5A	48-48.5A	48-48.5A	48-48.5A	
49-49.5A	49-49.5A	49-49.5A	49-49.5A	49-49.5A	49-49.5A	49-49.5A	49-49.5A	
50-50.5A	50-50.5A	50-50.5A	50-50.5A	50-50.5A	50-50.5A	50-50.5A	50-50.5A	
51-51.5A	51-51.5A	51-51.5A	51-51.5A	51-51.5A	51-51.5A	51-51.5A	51-51.5A	
52-52.5A	52-52.5A	52-52.5A	52-52.5A	52-52.5A	52-52.5A	52-52.5A	52-52.5A	
53-53.5A	53-53.5A	53-53.5A	53-53.5A	53-53.5A	53-53.5A	53-53.5A	53-53.5A	
54-54.5A	54-54.5A	54-54.5A	54-54.5A	54-54.5A	54-54.5A	54-54.5A	54-54.5A	
55-55.5A	55-55.5A	55-55.5A	55-55.5A	55-55.5A	55-55.5A	55-55.5A	55-55.5A	
56-56.5A	56-56.5A	56-56.5A	56-56.5A	56-56.5A	56-56.5A	56-56.5A	56-56.5A	
57-57.5A	57-57.5A	57-57.5A	57-57.5A	57-57.5A	57-57.5A	57-57.5A	57-57.5A	
58-58.5A	58-58.5A	58-58.5A	58-58.5A	58-58.5A	58-58.5A	58-58.5A	58-58.5A	
59-59.5A	59-59.5A	59-59.5A	59-59.5A	59-59.5A	59-59.5A	59-59.5A	59-59.5A	
60-60.5A	60-60.5A	60-60.5A	60-60.5A	60-60.5A	60-60.5A	60-60.5A	60-60.5A	
61-61.5A	61-61.5A	61-61.5A	61-61.5A	61-61.5A	61-61.5A	61-61.5A	61-61.5A	
62-62.5A	62-62.5A	62-62.5A	62-62.5A	62-62.5A	62-62.5A	62-62.5A	62-62.5A	
63-63.5A	63-63.5A	63-63.5A	63-63.5A	63-63.5A	63-63.5A	63-63.5A	63-63.5A	
64-64.5A	64-64.5A	64-64.5A	64-64.5A	64-64.5A	64-64.5A	64-64.5A	64-64.5A	
65-65.5A	65-65.5A	65-65.5A	65-65.5A	65-65.5A	65-65.5A	65-65.5A	65-65.5A	
66-66.5A	66-66.5A	66-66.5A	66-66.5A	66-66.5A	66-66.5A	66-66.5A	66-66.5A	
67-67.5A	67-67.5A	67-67.5A	67-67.5A	67-67.5A	67-67.5A	67-67.5A	67-67.5A	
68-68.5A	68-68.5A	68-68.5A	68-68.5A	68-68.5A	68-68.5A	68-68.5A	68-68.5A	
69-69.5A	69-69.5A	69-69.5A	69-69.5A	69-69.5A	69-69.5A	69-69.5A	69-69.5A	
70-70.5A	70-70.5A	70-70.5A	70-70.5A	70-70.5A	70-70.5A	70-70.5A	70-70.5A	
71-71.5A	71-71.5A	71-71.5A	71-71.5A	71-71.5A	71-71.5A	71-71.5A	71-71.5A	
72-72.5A	72-72.5A	72-72.5A	72-72.5A	72-72.5A	72-72.5A	72-72.5A	72-72.5A	
73-73.5A	73-73.5A	73-73.5A	73-73.5A	73-73.5A	73-73.5A	73-73.5A	73-73.5A	
74-74.5A	74-74.5A	74-74.5A	74-74.5A	74-74.5A	74-74.5A	74-74.5A	74-74.5A	
75-75.5A	75-75.5A	75-75.5A	75-75.5A	75-75.5A	75-75.5A	75-75.5A	75-75.5A	
76-76.5A	76-76.5A	76-76.5A	76-76.5A	76-76.5A	76-76.5A	76-76.5A	76-76.5A	
77-77.5A	77-77.5A	77-77.5A	77-77.5A	77-77.5A	77-77.5A	77-77.5A	77-77.5A	
78-78.5A	78-78.5A	78-78.5A	78-78.5A	78-78.5A	78-78.5A	78-78.5A	78-78.5A	
79-79.5A	79-79.5A	79-79.5A	79-79.5A	79-79.5A	79-79.5A	79-79.5A	79-79.5A	
80-80.5A	80-80.5A	80-80.5A	80-80.5A	80-80.5A	80-80.5A	80-80.5A	80-80.5A	
81-81.5A	81-81.5A	81-81.5A	81-81.5A	81-81.5A	81-81.5A	81-81.5A	81-81.5A	
82-82.5A	82-82.5A	82-82.5A	82-82.5A	82-82.5A	82-82.5A	82-82.5A	82-82.5A	
83-83.5A	83-83.5A	83-83.5A	83-83.5A	83-83.5A	83-83.5A	83-83.5A	83-83.5A	
84-84.5A	84-84.5A	84-84.5A	84-84.5A	84-84.5A	84-84.5A	84-84.5A	84-84.5A	
85-85.5A	85-85.5A	85-85.5A	85-85.5A	85-85.5A	85-85.5A	85-85.5A	85-85.5A	
86-86.5A	86-86.5A	86-86.5A	86-86.5A	86-86.5A	86-86.5A	86-86.5A	86-86.5A	
87-87.5A	87-87.5A	87-87.5A	87-87.5A	87-87.5A	87-87.5A	87-87.5A	87-87.5A	
88-88.5A	88-88.5A	88-88.5A	88-88.5A	88-88.5A	88-88.5A	88-88.5A	88-88.5A	
89-89.5A	89-89.5A	89-89.5A	89-89.5A	89-89.5A	89-89.5A	89-89.5A	89-89.5A	
90-90.5A	90-90.5A	90-90.5A	90-90.5A	90-90.5A	90-90.5A	90-90.5A	90-90.5A	
91-91.5A	91-91.5A	91-91.5A	91-91.5A	91-91.5A	91-91.5A	91-91.5A	91-91.5A	
92-92.5A	92-92.5A	92-92.5A	92-92.5A	92-92.5A	92-92.5A	92-92.5A	92-92.5A	
93-93.5A	93-93.5A	93-93.5A	93-93.5A	93-93.5A	93-93.5A	93-93.5A	93-93.5A	
94-94.5A	94-94.5A	94-94.5A	94-94.5A	94-94.5A	94-94.5A	94-94.5A	94-94.5A	
95-95.5A	95-95.5A	95-95.5A	95-95.5A	95-95.5A	95-95.5A	95-95.5A	95-95.5A	
96-96.5A	96-96.5A	96-96.5A	96-96.5A	96-96.5A	96-96.5A	96-96.5A	96-96.5A	
97-97.5A	97-97.5A	97-97.5A	97-97.5A	97-97.5A	97-97.5A	97-97.5A	97-97.5A	
98-98.5A	98-98.5A	98-98.5A	98-98.5A	98-98.5A	98-98.5A	98-98.5A	98-98.5A	
99-99.5A	99-99.5A	99-99.5A	99-99.5A	99-99.5A	99-99.5A	99-99.5A	99-99.5A	
100-100.5A	100-100.5A	100-100.5A	100-100.5A	100-100.5A	100-100.5A	100-100.5A	100-100.5A	

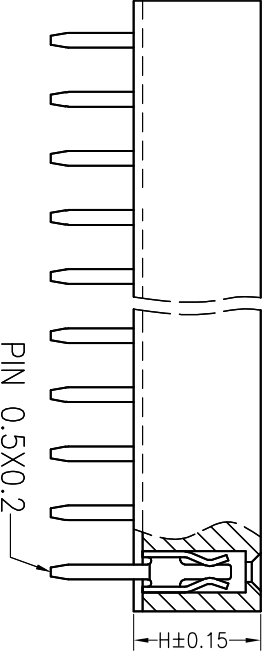

Dimension onthrees list					
ITEM	PB	PC	PW	H	W
001		2.4		4.3	4.0
002					