

Rohs

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance: 20m Ω Max

Withstand Voltage:500V AC/DC

Insulation Resistance: 1000M Ω Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Brass



Contact Plating: Au Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds

(260°C for 10 seconds)

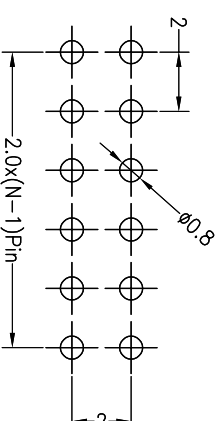
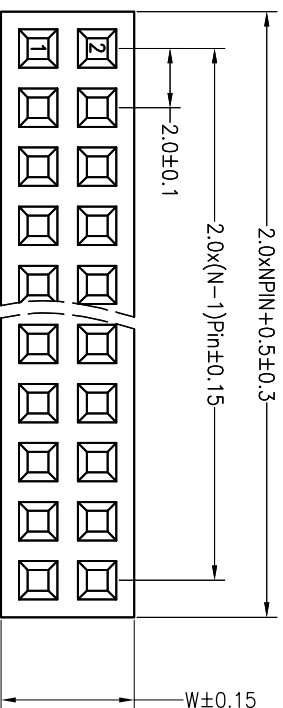


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

(PCB BOARD TOLERANCE $\pm$ 0.05)

Ordering Information

F	X	X	X	XX	X	XX	X	XXXX
产品型号	材料	厚度规格	材料	材料厚度	产品厚度	塑料材料	电导率	检测方法
F-1	1-127	D=4.5	1-40	1-40P	1-40P	1-PBT	0.01~0.05	1-检测
F-2	2-127	D=4.5	2-40	2-40P	2-40P	2-PBT	0.01~0.05	2-检测
F-3	3-127	D=4.5	3-40	3-40P	3-40P	3-PBT	0.01~0.05	3-检测
F-4	4-127	D=4.5	4-40	4-40P	4-40P	4-PBT	0.01~0.05	4-检测
F-5	5-127	D=4.5	5-40	5-40P	5-40P	5-PBT	0.01~0.05	5-检测
F-6	6-127	D=4.5	6-40	6-40P	6-40P	6-PBT	0.01~0.05	6-检测
F-7	7-127	D=4.5	7-40	7-40P	7-40P	7-PBT	0.01~0.05	7-检测

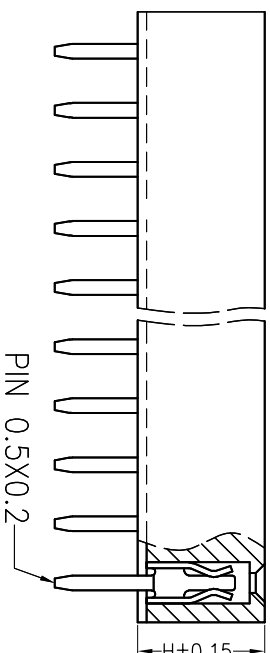

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001		2.4		4.3	4.0
002					

深圳市连盛精密连接器有限公司									
SCALE		FIT		PART NO. 1020200425					
UNIT		mm							
SIZE		A4							
SHEET		1/1		TITLE: 2.0FH H=4.3 W=4.0 2*11P DIP PC2.4 U型 AU1U 青銅 PA6T					
PROJ.									
DRAW				CHECK					
X.X		±0.30							
X.XX		±0.20							
X.XXX		±0.10		APPROVE					
Angle		±3°							
DIM		TOL							
OPERATION				CHANGE					
MODIFICATION DESCRIPTION				DATE					
REV				DATE					

深圳市连盛精密连接器有限公司

PART NO.

1020200425

TITLE:

2.0FH H=4.3 W=4.0 2*11P DIP PC2.4 U型
AU1U 青銅 PA6T