

RoHS

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:−40°c to +105°c



Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V−0)



Standard: PA6T

Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

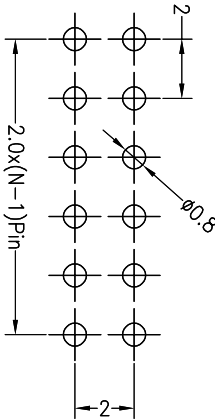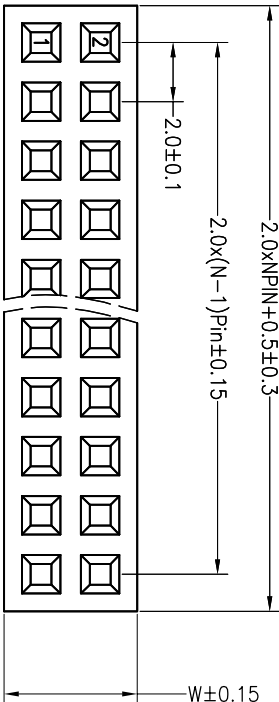

Ordering Information

F	X	X	X	XX	X	XX	X	XXX
产品型号	额定电流	额定电压	接触材料	绝缘材料	接触厚度	绝缘厚度	产品尺寸	序列号
1-PA6T	1-1.5A	1-27V	1-铜合金	1-PA6T	0.1±0.01	0.1±0.01	1-12.7x2.54	
2-PA6T	2-3.0A	2-43V	2-铜合金	2-PA6T	0.1±0.01	0.1±0.01	2-12.7x2.54	
3-PA6T	3-4.5A	3-65V	3-铜合金	3-PA6T	0.1±0.01	0.1±0.01	3-12.7x2.54	
4-PA6T	4-6.0A	4-91V	4-铜合金	4-PA6T	0.1±0.01	0.1±0.01	4-12.7x2.54	
5-PA6T	5-7.5A	5-127V	5-铜合金	5-PA6T	0.1±0.01	0.1±0.01	5-12.7x2.54	
6-PA6T	6-9.0A	6-158V	6-铜合金	6-PA6T	0.1±0.01	0.1±0.01	6-12.7x2.54	
7-PA6T	7-10.5A	7-185V	7-铜合金	7-PA6T	0.1±0.01	0.1±0.01	7-12.7x2.54	

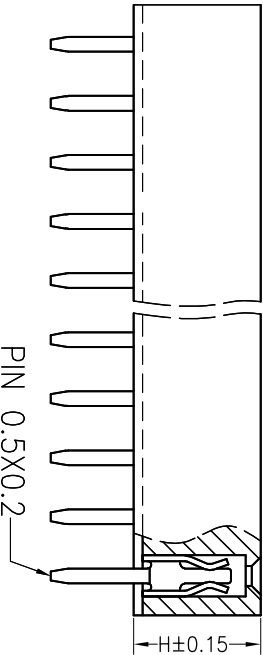

Dimension onthrees list					
ITEM	PB	PC	PW	H	W
001		2.4		4.3	4.0
002					

深圳市连盛精密连接器有限公司

深圳市连盛精密连接器有限公司													
		SCALE		FIT		PART NO. 1020200428							
		UNIT		mm									
		SIZE		A4									
		SHEET		1/1									
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		OPERATION		DRAW		TITLE: 2.0FH H=4.3 W=4.0 2*14P DIP PC2.4 U型 AU1U 青铜 P46T	
								X.X		±0.30			
								X.XX		±0.20			
								X.XXX		±0.10			
		Angle		±3°		CHECK		APPROVE					
		DIM		TOL									