

1	2	3	4	5	6	7	8	9
RoHS								

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:−40°c to +105°c





Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V−0)

Standard: PA6T

Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

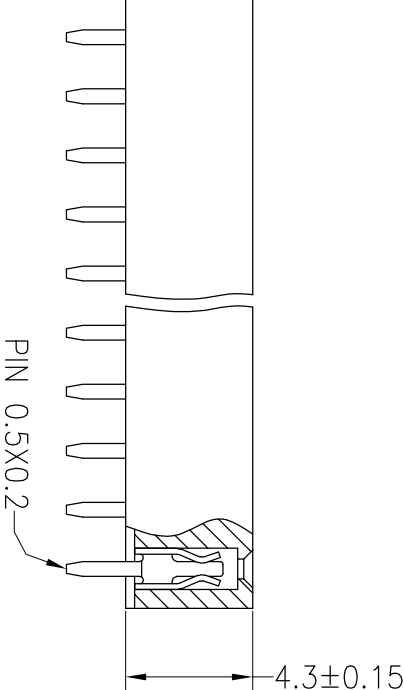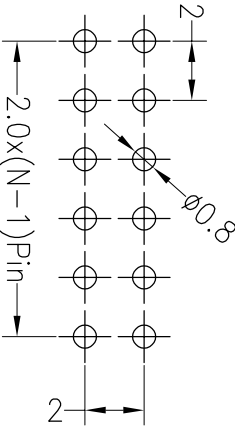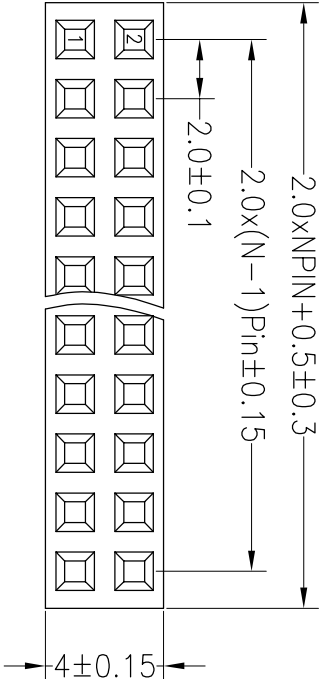

A0	2018.09.03	NEW DRAWING						
REV	DATE	MODIFICATION DESCRIPTION	CHANGE					
1	2	3	4	5	6	7	8	9
OPERATION				DRAW		SCALE		
X.X				±0.30		UNIT		FIT
X.XX				±0.20		CHECK		
X.XXX				±0.10		SIZE		A4
Angle				±3°		SHEET		1/1
DIM				TOL		APPROVE		
						PROJ.		
						TITLE:		
						PART NO.		
						1020200317		
						2.0FH H4.3mm 2x15pin 180° W4.0		
						PC2.4		

深圳市连盛精密连接器有限公司

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)