
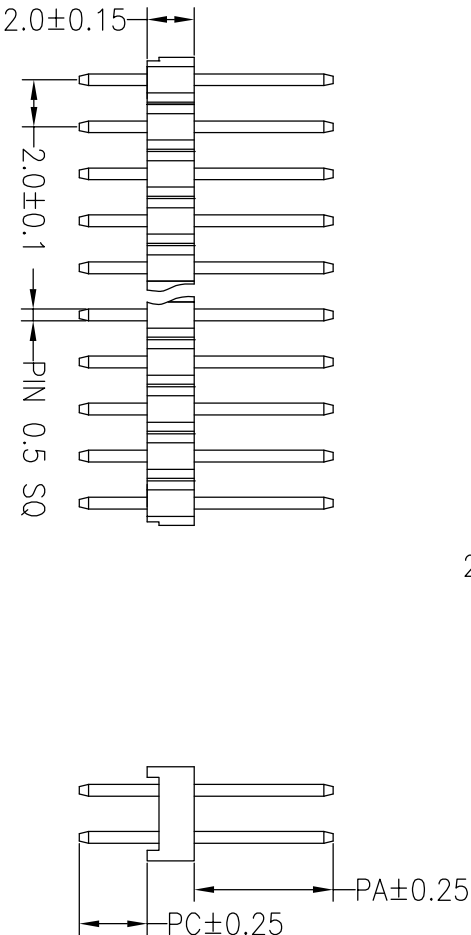
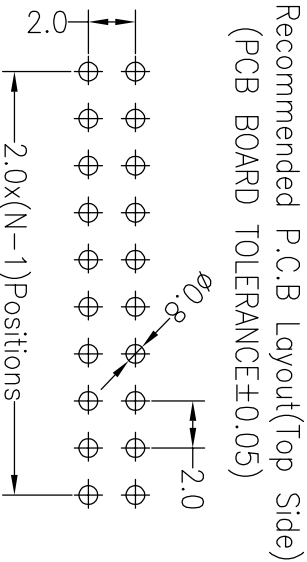


1	2	3	4	5	6	7	8	9
RoHS								

F	SPECIFICATIONS							
	Rated Current:1.5AMP							
	Contact Resistance:20mΩ Max							
	Withstand Voltage:500V AC/DC							
	Insulation Resistance:1000MΩ Min							
E	Operation Temperature:−40°c to +105°c							
	Contact Material:Brass							
	Contact Plating:Au Over Ni							
	Insulator Material:Polyester(UL94V−0)							
	Standard: PA6T							
D	Max.Processing Temp: 230°C for 30−60 seconds							
	(260°C for 5 seconds)							
C								
B								
A								

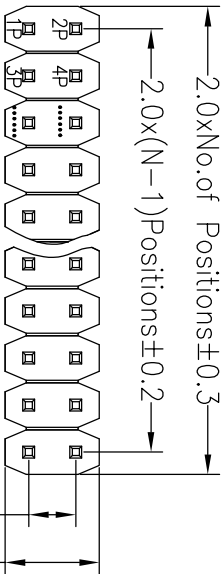

Dimension antitheses list								
ITEM	PC	PA	L					
Standard	2.80	3.90	8.70					
Alternate								

深圳市连盛精密连接器有限公司									
				SCALE		FIT		PART NO. 1010200209	
				UNIT		mm			
				SIZE		A4			
				SHEET		1/1			
				PROJ.				TITLE:	
								2.0PH 2x16pin H2.0mm 180°	
A									
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		DIM	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4			