
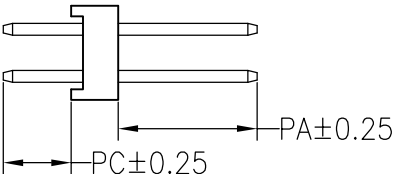
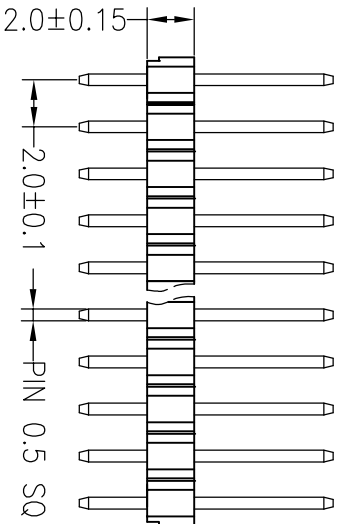
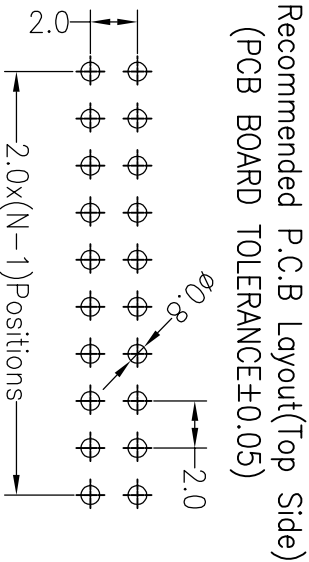


RoHS

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

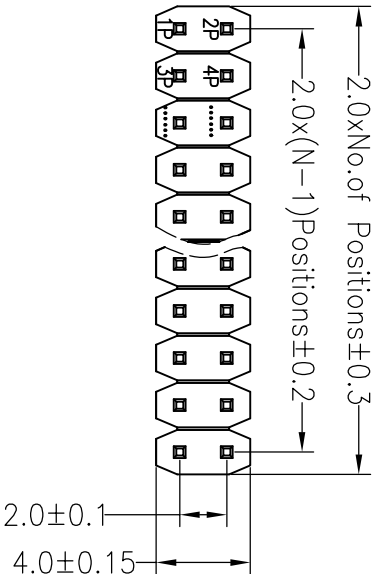

Dimension antitheses list			
ITEM	PC	PA	L
Standard	2.80	3.90	8.70
Alternate			

料号：201BS2130F01LSJM

深圳市连盛精密连接器有限公司

				OPERATION						深圳市连盛精密连接器有限公司			
				X.X	±0.30	DRAW						SCALE	FIT
				X.XX	±0.20		UNIT	mm					
				X.XXX	±0.10		SIZE	A4					
						CHECK				SHEET	1/1		
AO	2012.04.11		NEW DRAWING										
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE			PROJ.	TITLE:		
										◆	2.0PH 2x15pin H2.0mm DIP		