

FC-LCM3225-LCM4532-Series Common mode Chokes

Features:


- 1、 FC-LCM common mode impedance at high frequency effectsexcellent noise suppression performance. 在高頻的共模阻抗具有良好的雜訊抑制表現。
- 2、 The common mode choke coils structure enables noiseSuppression
- 3、 without degrading the signal
(共模扼線圈的結構使得雜訊被抑制訊號衰減。)

Applications:

Used for power line noise suppression for any electronic devices.
Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors,etc.






1.SHAPES AND DIMENSIONS Unit:mm

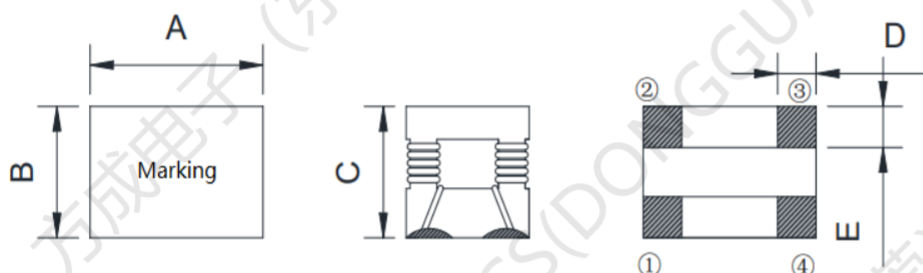

PartNumber	A	B	C	D Typ	E(ref)
FC-LCM3225	3.2±0.3	2.5±0.3	2.5±0.3	0.8	0.6
FC-LCM4532	4.5±0.3	3.2±0.3	3.2±0.3	1.0	1.0

2.MEASURING CIRCUITS

- A chip-type common mode filter for large current applications. Common mode impedance surpasses 300 to 1000 Ω at 100MHz. Noise is greatly suppressed.
- Capable of handling the highest current (up to 10A) of any chiptype common mode filter.
- Height and size have been considered, resulting in a compact and light-weight choke coil. Applicable for the miniaturization required to reduce the size and weight of portable equipment.




3.ELECTRICAL CHARACTERISTICS


PART Number	Z(Ω) 100MHz/0.1V	RDC (m Ω) Max	Rated Current (A) Max	IR (M Ω) Min	Rated Voltage(V)
	Ω /typ				
FC-LCM3225-421	420	30	2.0	10	125
FC-LCM3225-501	500	50	1.5	10	
FC-LCM3225-701	700	60	1.0	10	
FC-LCM3225-102	1000	75	0.5	10	

4. IMPEDANCE vs. FREQUENCY CHARACTERISTICS


FC-LCM3225-421

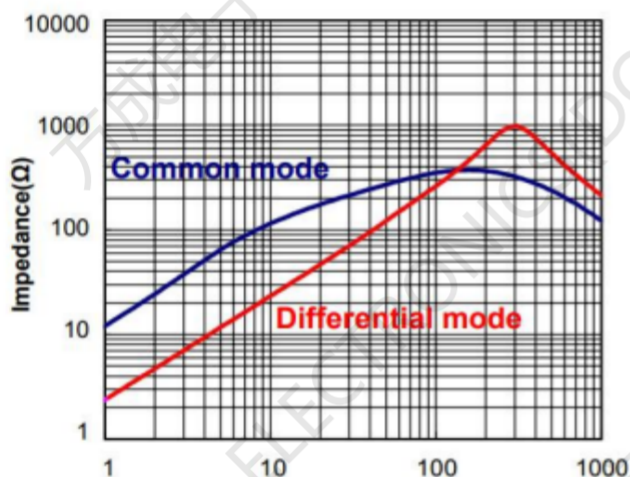


FC-LCM3225-501

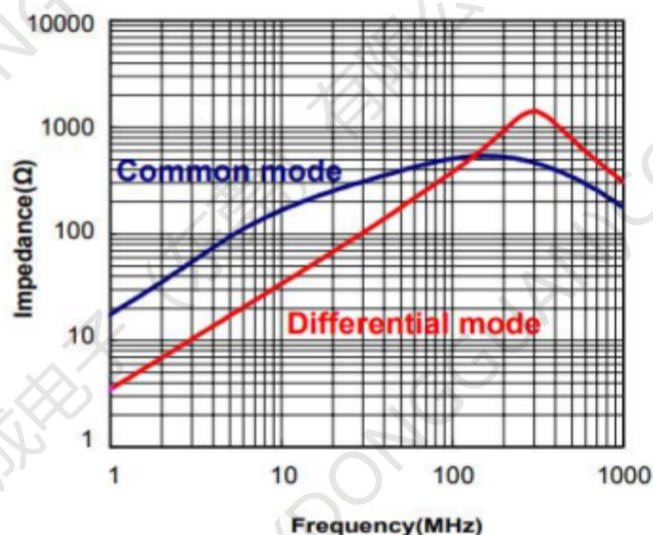

FC-LCM3225-701

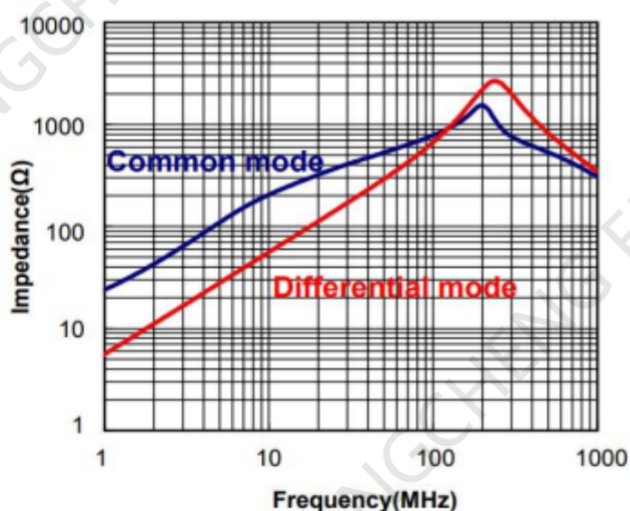

FC-LCM3225-102

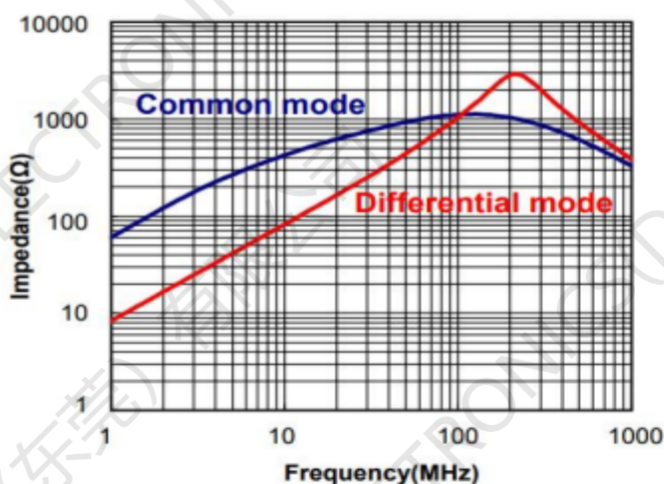


5.ELECTRICAL CHARACTERISTICS


PART Number	Z(Ω) 100MHz/0.1V		RDC (m Ω) Max	Rated Current (A) Max	IR (M Ω) Min	Rated Voltage(V)
	Ω /min	typ				
FC-LCM4532-421	350	420	25	2.5	10	125V
FC-LCM4532-701	500	700	38	2.0	10	
FC-LCM4532-102	850	1000	50	1.5	10	
FC-LCM4532-152	1300	1500	65	1.0	10	

6.IMPEDANCE vs. FREQUENCY CHARACTERISTICS


FC-LCM4532-421

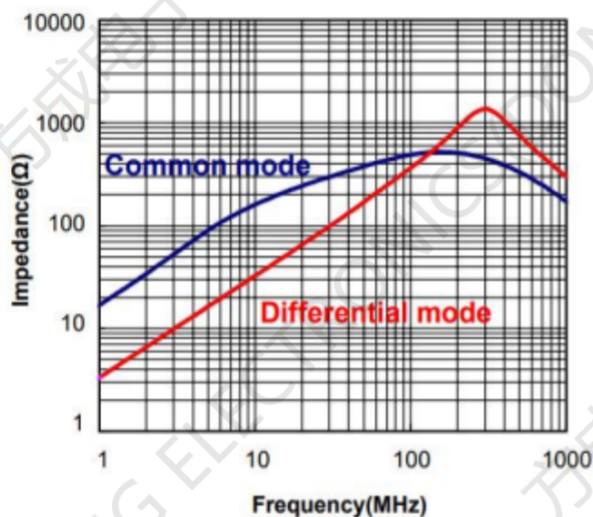

FC-LCM4532-701

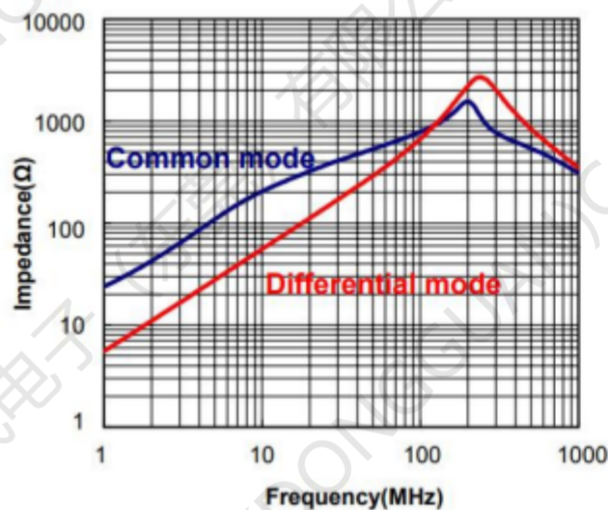

FC-LCM4532-102

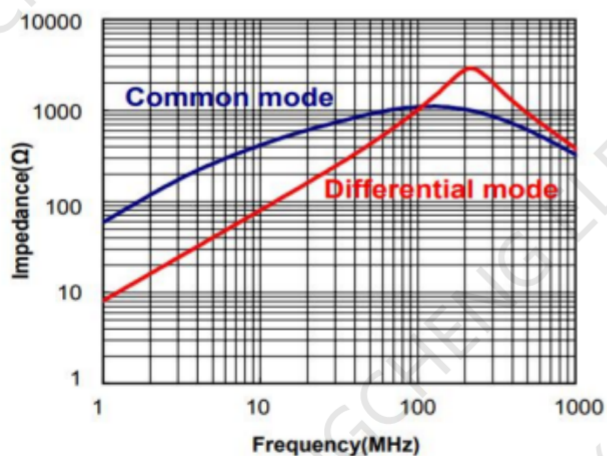

FC-LCM4532-152

