



557-110 EMI/RFI D-Subminiature Solid Backshell for Individual and Overall Shielding with Strain-Relief

557 T 110 M 2 F 02 C

Basic Part No. _____

Cable Entry Style _____
T = Top
S = Side
E = End

Basic Part Number _____

Finish Symbol (Page 3) _____

C = Supplied With Retainer Clips and Jackscrews, Omit for None

Cable Entry Dash No. (Table II)

F = Strain Relief
G = Gland Nut

Shell Size (Table I)

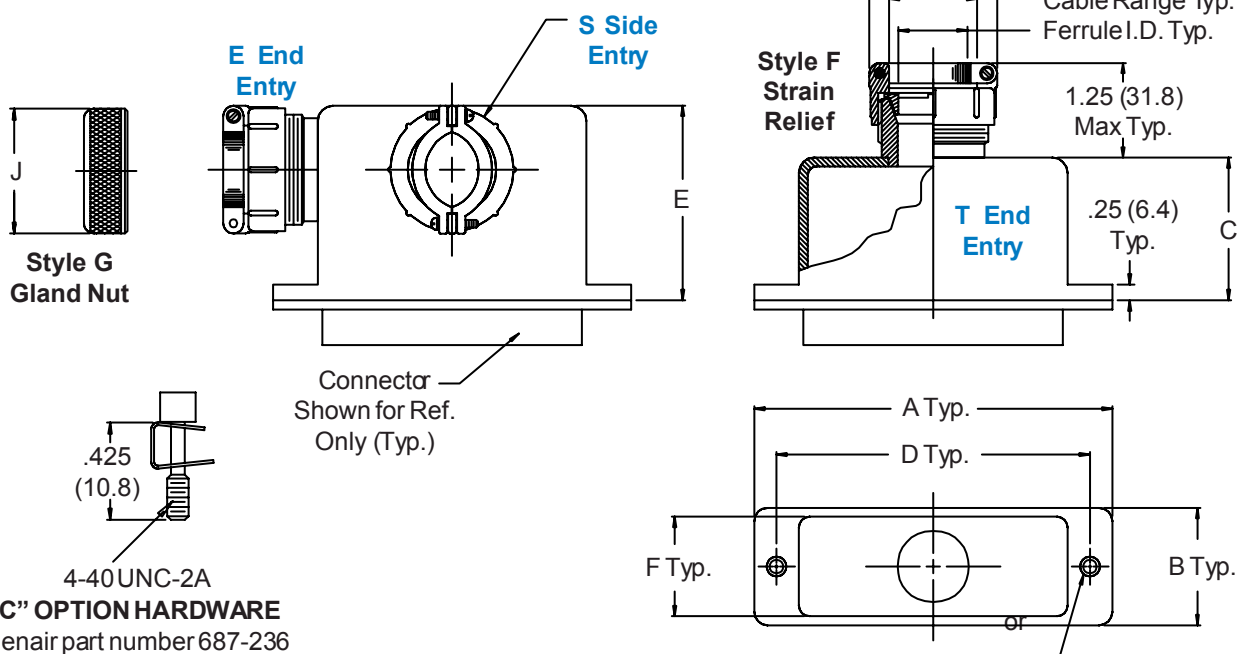


TABLE II: CABLE ENTRY

Dash No.	H Max	J Max	Cable Range		Ferrule I.D.
			Min	Max	
02	.968 (24.6)	.781 (19.8)	.125 (3.2)	.250 (6.4)	.125 (3.2)
03	1.046 (26.6)	.906 (23.0)	.250 (6.4)	.375 (9.5)	.250 (6.4)
04	1.156 (29.4)	1.031 (26.2)	.312 (7.9)	.500 (12.7)	.375 (9.5)
05	1.218 (30.9)	1.156 (29.4)	.375 (9.5)	.625 (15.9)	.500 (12.7)

Tapped f 4-40 UNC-2B (2 places). When C option is ordered, two cleared holes are supplied.

Metric dimensions (mm) are indicated in parentheses.


TABLE I: CONNECTOR/SHELL INTERFACE & BACKSHELL DIMENSIONS

Shell Size	Com'l Shell Size Ref	A	B	C	D ±.005 (.1)	E	F	Max Dash No. Table II
1	E/09	1.25 (31.8)	.53 (13.5)	.75 (19.1)	.984 (25.0)	1.88 (47.8)	.43 (10.9)	04
2	A/15	1.58 (40.1)	.53 (13.5)	.75 (19.1)	1.312 (33.3)	1.88 (47.8)	.43 (10.9)	04
3	B/25	2.13 (54.1)	.53 (13.5)	1.00 (25.4)	1.852 (47.0)	1.88 (47.8)	.43 (10.9)	04
4	C/37	2.77 (70.4)	.53 (13.5)	1.00 (25.4)	2.500 (63.5)	1.88 (47.8)	.43 (10.9)	04
5	D/50	2.68 (68.1)	.66 (16.8)	1.25 (31.8)	2.406 (61.1)	2.13 (54.1)	.56 (14.2)	04
6	F/104	2.77 (70.4)	.73 (18.5)	1.25 (31.8)	2.500 (63.5)	2.13 (54.1)	.63 (16.0)	05

D-Subminiature Split Backshells Standard Dimensions



MIL-DTL-24308
D-Subminiature

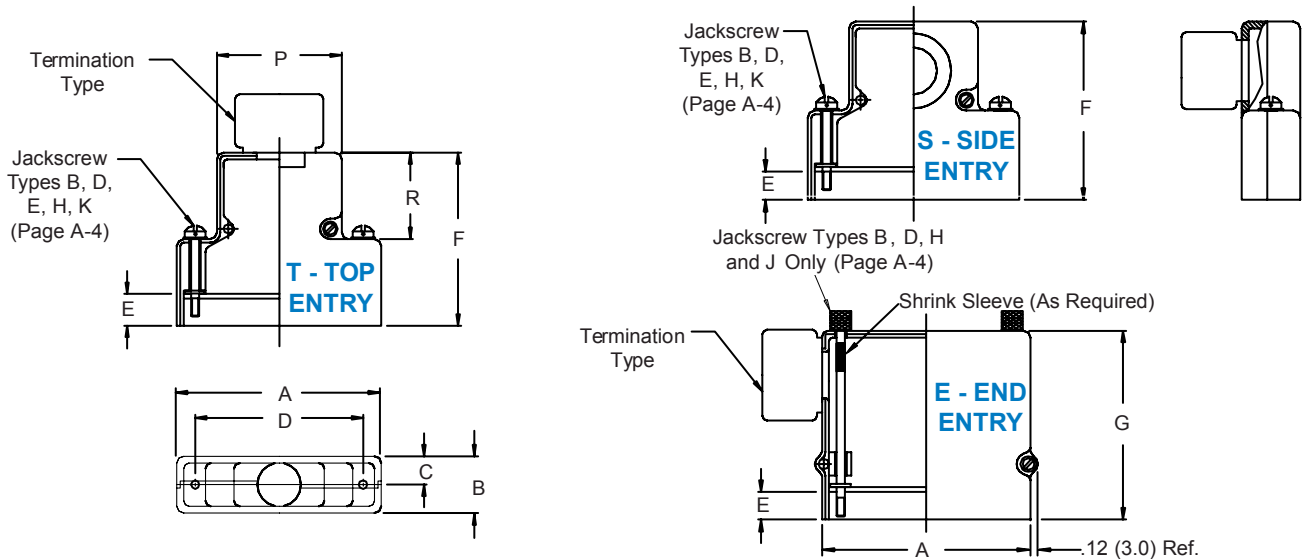

COMMON CONNECTOR/SHELL INTERFACE & BACKSHELL DIMENSIONS

Shell Size	Com'l Shell Size Ref	A Max	B Max	C Ref.	D ±.005 (.1)	P	R Ref
1	E/09	1.393 (35.4)	.624 (15.8)	.312 (7.9)	.984 (25.0)	.730 (18.5)	.719 (18.3)
2	A/15	1.706 (43.3)	.624 (15.8)	.312 (7.9)	1.312 (33.3)	1.050 (26.7)	.719 (18.3)
3	B/25	2.265 (57.5)	.624 (15.8)	.312 (7.9)	1.852 (47.0)	1.594 (40.5)	.938 (23.8)
4	C/37	2.900 (73.7)	.624 (15.8)	.312 (7.9)	2.500 (63.5)	2.240 (56.9)	.938 (23.8)
5	D/50	2.800 (71.1)	.750 (19.1)	.375 (9.5)	2.406 (61.1)	2.140 (54.4)	.938 (23.8)
6	F/104	2.900 (73.7)	.844 (21.4)	.422 (10.7)	2.500 (63.5)	2.240 (56.9)	1.094 (27.8)

CABLE MOUNTING AND BACKSHELL DIMENSIONS

Dash No.	Panel Thickness	E	F ± .031 (0.79)			G ± .031 (0.79)	
			Sizes 1 & 2	Sizes 3 - 5	Size 6	Sizes 1 & 2	Sizes 3 - 5
CC	n/a	.174 (4.4)	1.451 (36.9)	1.671 (42.4)	1.820 (46.2)	1.583 (40.2)	1.831 (46.5)
F0	n/a	.343 (8.7)	1.625 (41.3)	1.844 (46.8)	2.000 (50.8)	1.750 (44.5)	2.000 (50.8)
R1	.031 (.8)	.247 (6.3)	1.525 (38.7)	1.745 (44.3)	1.890 (48.0)	1.656 (42.1)	1.904 (48.4)
R2	.047 (1.2)	.231 (5.9)	1.509 (38.3)	1.728 (43.9)	1.875 (47.6)	1.640 (41.7)	1.888 (48.0)
R3	.062 (1.6)	.216 (5.5)	1.500 (38.1)	1.720 (43.7)	1.860 (47.2)	1.625 (41.3)	1.873 (47.6)
R4	.093 (2.4)	.185 (4.7)	1.470 (37.3)	1.690 (42.9)	1.829 (46.5)	1.594 (40.5)	1.842 (46.8)
R5	.104 (2.6)	.174 (4.4)	1.451 (36.9)	1.671 (42.4)	1.820 (46.2)	1.583 (40.2)	1.831 (46.5)
R6	.125 (3.2)	.153 (3.9)	1.430 (36.3)	1.650 (41.9)	1.798 (45.7)	1.563 (39.7)	1.811 (46.0)
R7	.156 (4.0)	.125 (3.2)	1.400 (35.6)	1.620 (41.1)	1.767 (44.9)	1.531 (38.9)	1.781 (45.2)
R8	.135 (3.4)	.140 (3.6)	1.417 (36.0)	1.637 (41.6)	1.805 (45.8)	1.550 (39.4)	1.798 (45.7)
R9	.188 (4.8)	.094 (2.4)	1.368 (34.7)	1.590 (40.4)	1.740 (44.2)	1.500 (38.1)	1.750 (44.5)

Metric dimensions (mm) are indicated in parentheses.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[557S110M2F04](#) [557T110NF1F03C](#) [557T110NF2F03C](#) [557T110M6F05C](#) [557T110NF4F03C](#) [557T110NF1F02C](#)
[557T110M3F03C](#) [557T110N2F04C](#) [557E110J1F03C](#) [557T110M4F03C](#) [557T110N1F03C](#) [557T110M1F02C](#)
[557E110A5F04](#) [557T110NF3F02C](#) [557E110J5F04C](#) [557E110NF1F03C](#) [557T110NF3F03C](#) [557T110NF3F04C](#)
[557T110M1F03](#) [557T110M1F04C](#) [557T485NF30SK](#) [557T071M131C-32](#) [557T071M230C](#) [557T071M330SB](#)
[557T071NF332SC](#) [557T071ZN123B](#) [557T526ZN2R4E1-02B](#) [557T526ZN2R4E1-03B](#) [557T316M133TBH6](#)
[557T316M231SL](#) [557T316M331H](#) [557T387M1F03C](#) [557T498M2](#) [557T526ZN1CCP1-02B](#) [557T246NF304STB](#)
[557T246ZN104B](#) [557T283NF3B06-49E](#) [557T283ZNU1A06](#) [557T316M123TX](#) [557T316M131TBA](#) [557T246M304STB](#)
[557T246M305ST](#) [557T246M404T](#) [557T246M404TB](#) [557T246M610TB](#) [557T246M612ST](#) [557T113M231](#)
[557T186XM4R3D1-05K](#) [557T186XM5R3D1-07K](#) [557T215B520CT](#) [557T246M104TB](#) [557T246M2P07TB](#)
[557T071ZN323B](#) [557T071ZN331B](#) [557T110M2F02](#) [557T110M4F04C](#) [557T110N1F04C](#) [557T110W6F05C](#)
[557T291M104HST-401](#) [557T386M223](#) [557T386M230](#) [557T291M204HST-401](#) [557T528NF4R3A0-162TB](#)
[557T246M204](#) [557T316M231A](#) [557T238M3F04](#) [557T202M4A13B13C13](#) [557T202M4A23B23C23](#)
[557T291M304HST-401](#) [557T291M406HST-401](#) [557T291M208HST-401](#) [557T291M508HST-401](#) [557T291M408HST-](#)
[401](#) [557T291M305HST-401](#) [557T554M3](#) [557T113M116B](#) [557T538XMD114R3E](#) [557T316M331C](#)
[557T196MA4R5H1-12B-186G](#) [557T246M4P16TK](#) [557T386M123](#) [557T538XMD214R3E](#) [557T538XMD314R3E](#)
[557T538XMD414R3E](#) [557T538XMD517R3E](#) [557T048ZN1R60-04](#)