10/100BASE - TX SINGLE PORT TRANSFORMER MODULE

Ruggedized



- Compliant with IEEE 802.3 standards
- 350µH OCL with 8mA DC bias
- Epoxy encapsulated package withstands 235°C peak temperature profile
- Operating Temperature: -55°C to +125°C
- Moisture Sensitivity Level: 3

Electrical Specifications @ 25°C																						
	Insertion Loss (dB MAX)					Return Loss (dB MIN)				Crosstalk (dB MIN)			DM to CM Rejection (dB MIN)				CM to CM Rejection (dB MIN)					
Part Number	0.10 MHz	1 MHz	30 MHz	60 MHz	100 MHz	2 MHz	30 MHz	50 MHz	60 MHz	80 MHz	1 MHz	30 MHz	60 MHz	100 MHz	1 MHz	30 MHz	60 MHz	100 MHz	1 MHz	30 MHz	60 MHz	100 MHz
100B-1027FX	1.5	1.5	1.5	1.5	1.5	18	18	14	12	10	50	45	38	33	42	37	33	33	40	35	30	30

NOTES:

- 1. Add suffix "NL" for RoHS compliant version; i.e. 100B-1001 becomes 100B-1027FXNL. NL parts have 100% SN Lead Finish (MSL:4)
- 2. For Tape & Reel packaging, add "T" suffix at the end of the part number: i.e. 100B-1027FXNLT.

Electrical Schematics Mechanicals Dimensions: inch [mm] 100B-1027FX Tolerance (unless otherwise specified): ±0.010 [0.25] TRANSMIT 10 (TX+) \mathbb{W} 0.495±0.015 [12.57±0.380] 0.405 [10.29] 12 (TCMT) (TD-) 15 11 (TX-) 8888 16X 0.020 [0.51] 16X 0.040 [1.016] RECEIVE 14X 0.100 [2.54] 14X 0.100 [2.54] 0.700 [17.78] 7 (RX+) (RD+) 1 PCB PAD PATTERN (REFERENCE ONLY) 5 (RCMT) (RD-) 2 6 (RX-) 0.240 [6.05] MAX 16X 0°-8 (RCT) 3 16X 0.040 [1.02] 0.010 [0.25] 16 SURFACES LEGEND All channels are in phase between input and output




10/100BASE - TX SINGLE PORT TRANSFORMER MODULE





Tin/Lead Recommended Reflow Profile (Based on J-STD-020D)

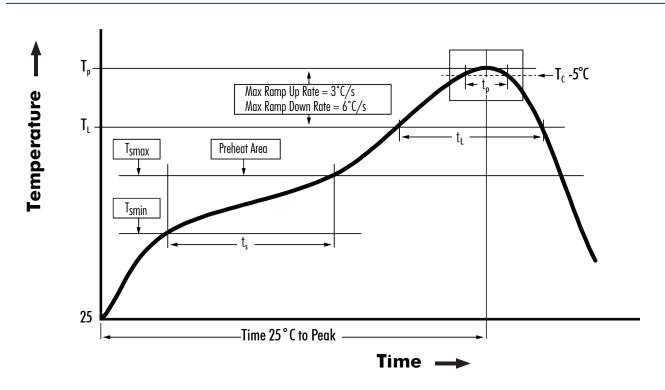

T _{smin} (°C)	T _{smax} (°C)	T _ւ (°C)	T _P (°C MAX)	† _s (s)	† _L (s)	t _p (s MAX)	Ramp-up rate (T _L to T _P)	Ramp-down rate (T _P to T _L)	Time 25°C to peak temperature (s MAX)
100	150	183	235	60 - 120	60 - 150	20	3°C/s MAX	6°C/s MAX	360

NOTES:

- 1. All temperatures measured on the package leads.
- 2. Maximum times of reflow cycle: 2



iNRCORE, LLC 311 Sinclair Road, Bristol, PA 19007-6812 USA Tel: +1.215.781.6400 Fax: +1.215.781.6430

www.iNRCORE.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

INRCORE:

100B-1027F 100B-1027FX