

DAISY-7X1-WW-D

~80° wide beam. Variant with diffused lenses.

SPECIFICATION:

Dimensions	279.5 x 39.6 mm
Height	20.3 mm
Fastening	pin, screw, clips
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish
C17361_DAISY-7X1-WW-D	Linear lens	PMMA	milky	
C18409_DAISY-7X1-SHD-MET-MATT	Shade	PC	metal	matt
C18167_DAISY-7X1-SHD-MET	Shade	PC	metal	gloss
C17225_DAISY-7X1-SHD-WHT-MATT	Shade	PC	white	matt
C17051_DAISY-7X1-SHD-MATT	Shade	PC	black	matt
C16876_DAISY-7X1-SHD-WHT	Shade	PC	white	gloss
C16872_DAISY-7X1-SHD	Shade	PC	black	gloss


ORDERING INFORMATION:

Quantities for one set:

Linear lens	1
Shade	1

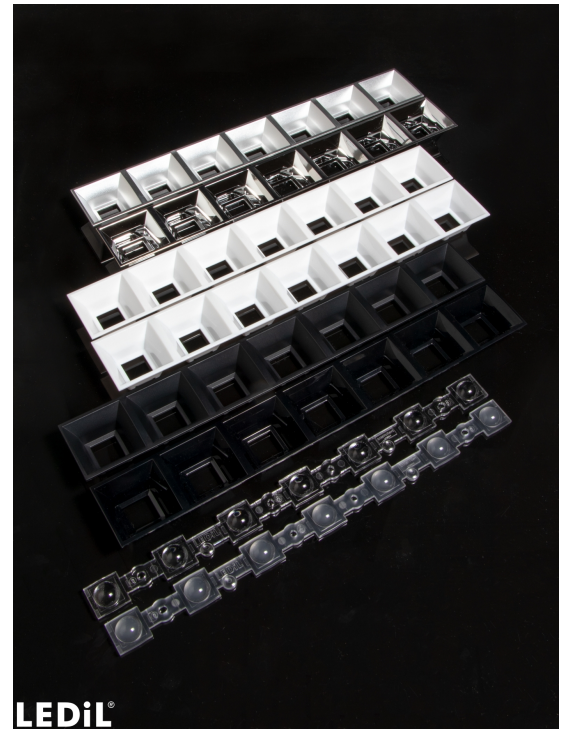

Component		Qty in box	MOQ	MPQ	Box weight (kg)
C17361_DAISY-7X1-WW-D » Box size: 400 x 300 x 300 mm	Linear lens	312	312	24	5.5
C17225_DAISY-7X1-SHD-WHT-MATT » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.6
C16872_DAISY-7X1-SHD » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.1
C16876_DAISY-7X1-SHD-WHT » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.6
C18167_DAISY-7X1-SHD-MET » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.0
C17051_DAISY-7X1-SHD-MATT » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.3
C18409_DAISY-7X1-SHD-MET-MATT » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.0

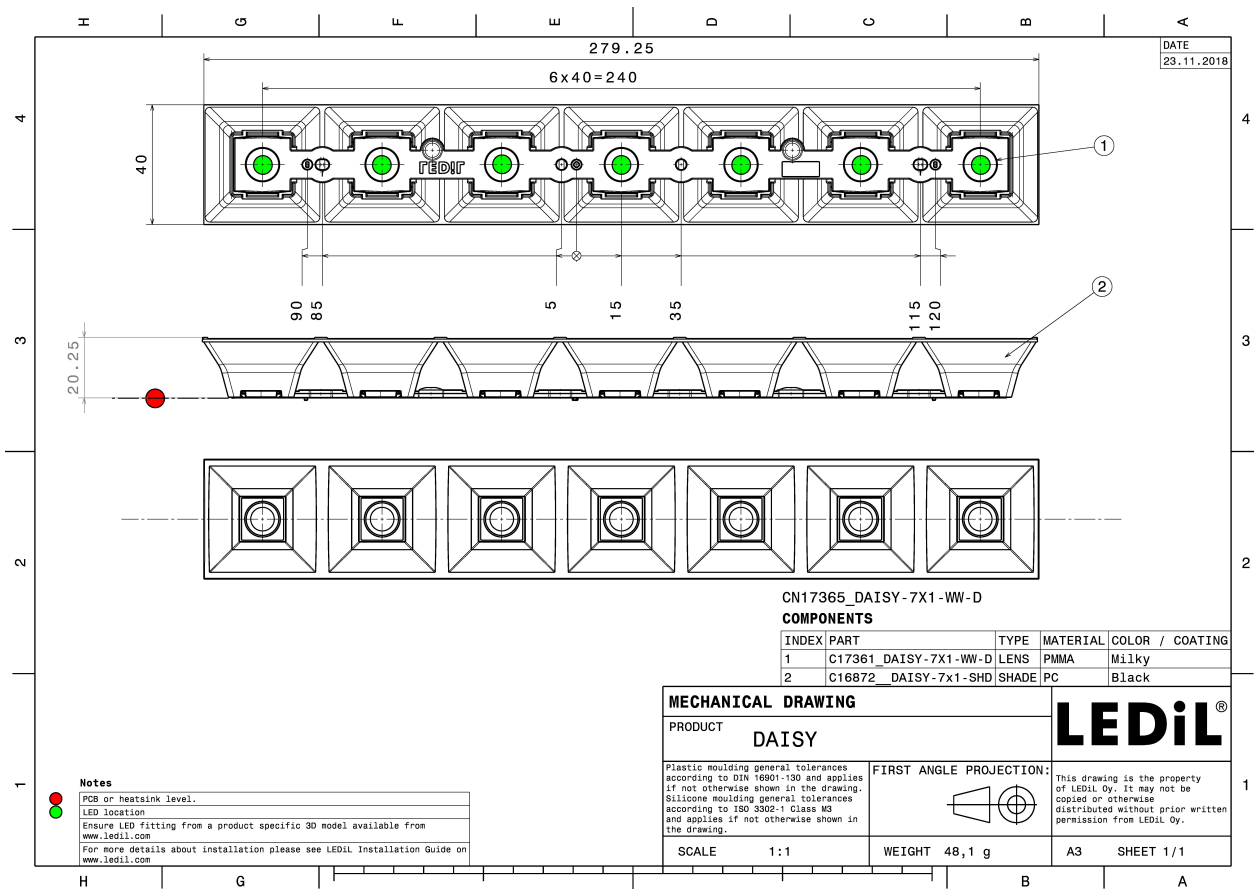


See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):




LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 74.0° / 94.0°
 Efficiency 91 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17533_DAISSY-7X1-SHD-MET-MATT

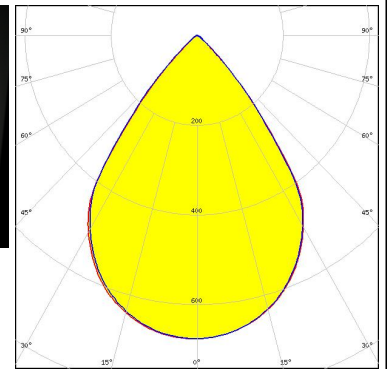



LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 74.5° / 92.0°
 Efficiency 78 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17051_DAISSY-7X1-SHD-MATT

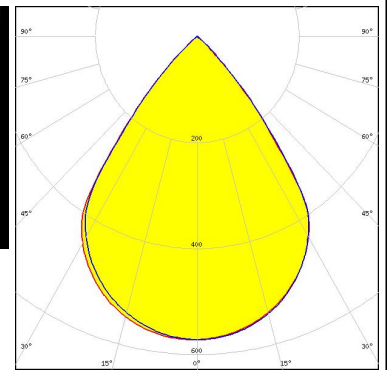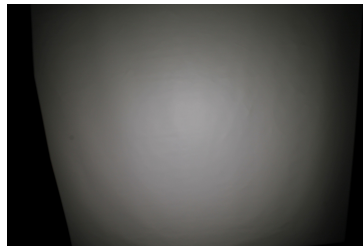

LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 75.5° / 96.0°
 Efficiency 92 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17225_DAISSY-7X1-SHD-WHT-MATT

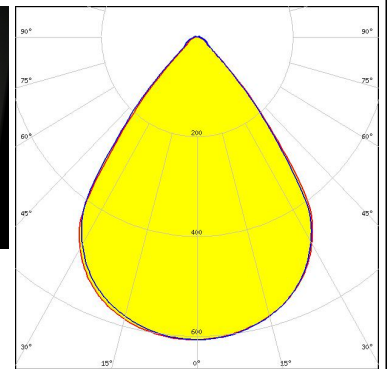


LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 75.0° / 93.0°
 Efficiency 79 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16872_DAISSY-7X1-SHD

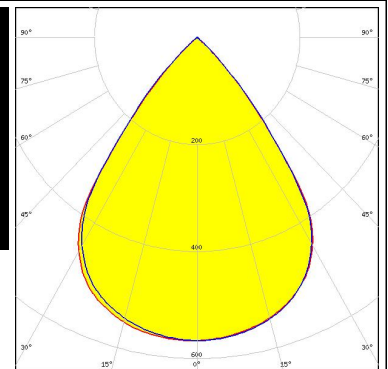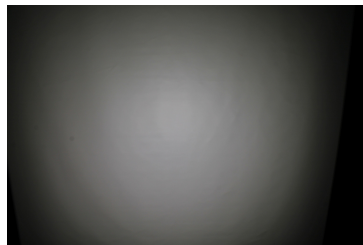


OPTICAL RESULTS (MEASURED):





LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 74.0° / 93.0°
 Efficiency 94 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C18167_DAISY-7X1-SHD-MET

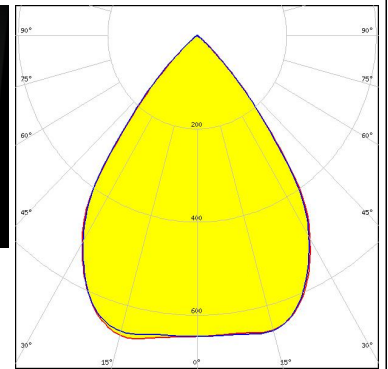


LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 75.5° / 96.0°
 Efficiency 93 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16876_DAISY-7X1-SHD-WHT

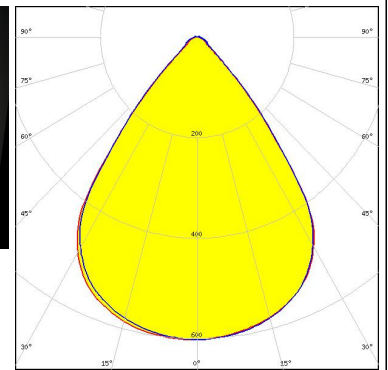

LED LUXEON 2835 Line
 FWHM / FWTM 74.5° / 92.0 + 93.0°
 Efficiency 79 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16872_DAISY-7X1-SHD

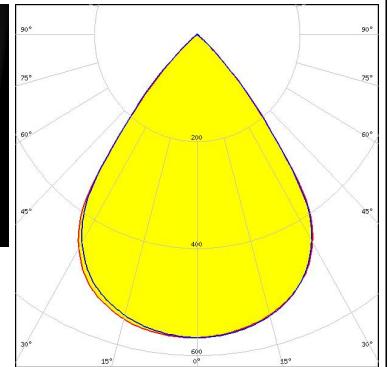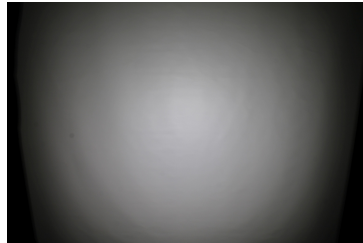



LED LUXEON 2835 Line
 FWHM / FWTM 73.5° / 93.0 + 93.5°
 Efficiency 94 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17532_DAISY-7X1-SHD-MET

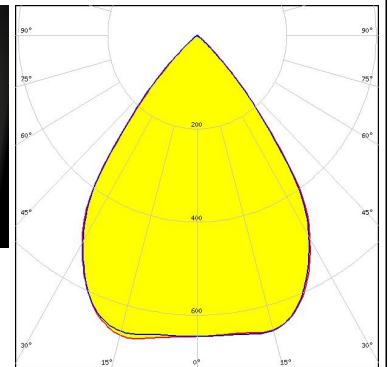



OPTICAL RESULTS (MEASURED):




LED LUXEON 2835 Line
FWHM / FWTM 75.5° / 95.5 + 97.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16876_DAISY-7X1-SHD-WHT

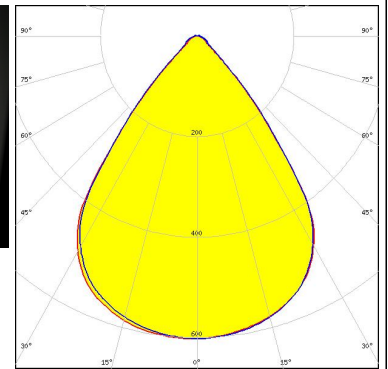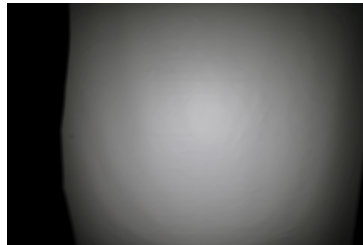


LED LUXEON 2835 Line
FWHM / FWTM 74.0° / 93.5 + 94.5°
Efficiency 91 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17533_DAISY-7X1-SHD-MET-MATT

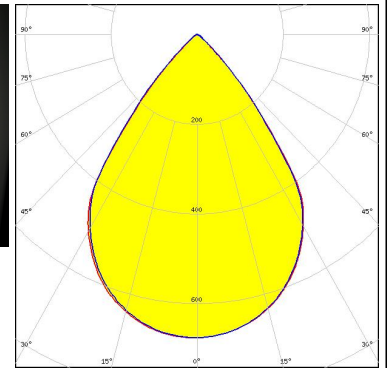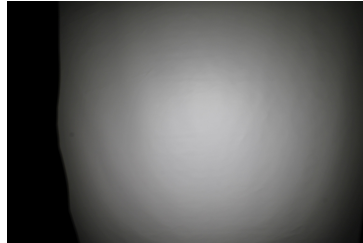

LED LUXEON 2835 Line
FWHM / FWTM 74.5° / 92.0 + 92.5°
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISY-7X1-SHD-MATT

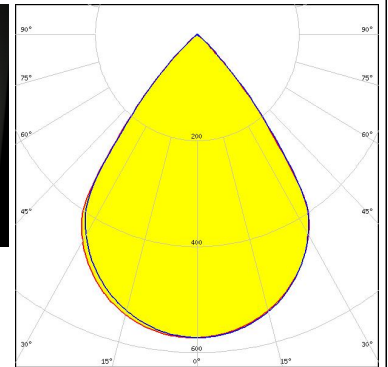

LED LUXEON 2835 Line
FWHM / FWTM 75.5° / 95.5 + 97.0°
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT


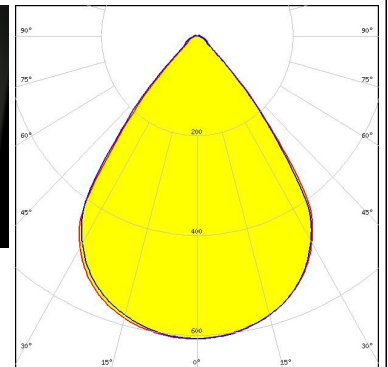


OPTICAL RESULTS (MEASURED):

MST

Your solutions


LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 75.0° / 97.0°
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT

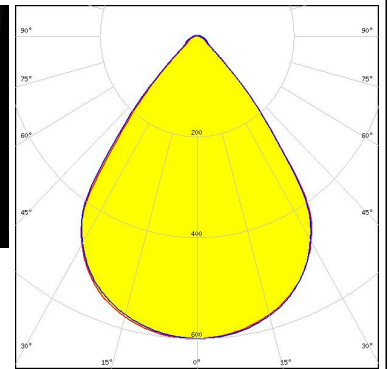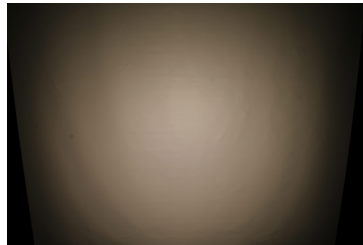

MST

Your solutions



LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 74.0° / 93.0°
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16872_DAISY-7X1-SHD

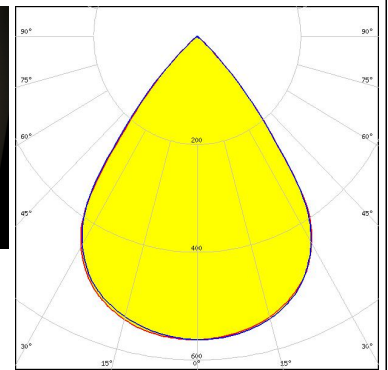

MST

Your solutions



LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 74.0° / 93.0°
Efficiency 93 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C18167_DAISY-7X1-SHD-MET

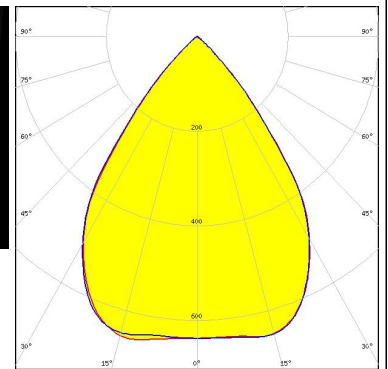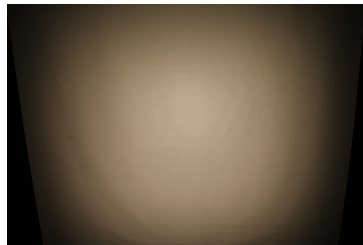

MST

Your solutions

LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 76.0° / 97.0°
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16876_DAISY-7X1-SHD-WHT

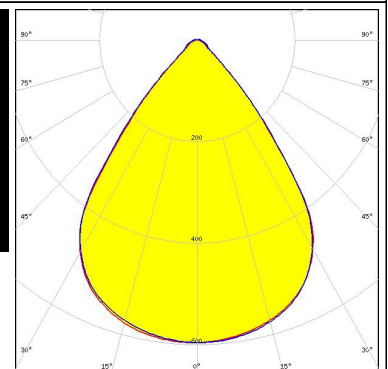
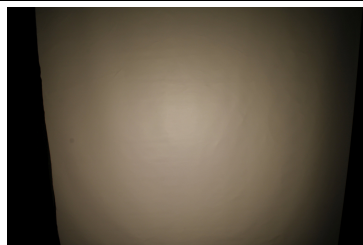


OPTICAL RESULTS (MEASURED):

MST

Your solutions



LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 74.0° / 94.0°
Efficiency 90 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17533_DAISSY-7X1-SHD-MET-MATT

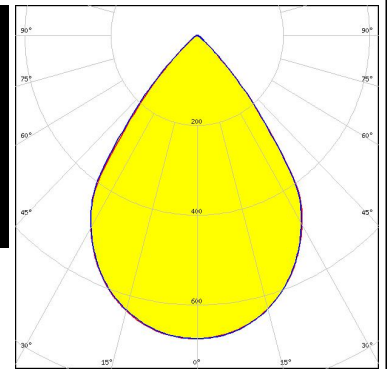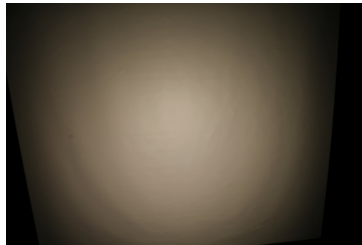

MST

Your solutions



LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 75.0° / 93.0°
Efficiency 76 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISSY-7X1-SHD-MATT

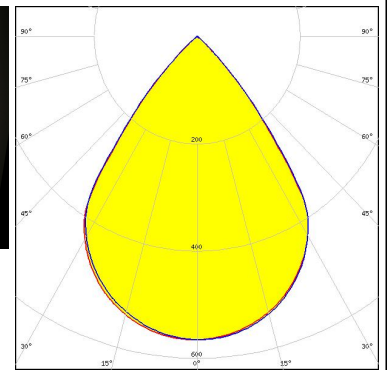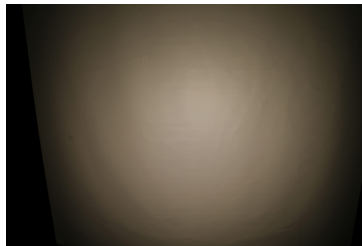

MST

Your solutions



LED LinLED 280x28mm 1600lm 840 4C 21V DAISY 7x1(ZT25)
FWHM / FWTM 77.0° / 89.0°
Efficiency 77 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16872_DAISSY-7X1-SHD

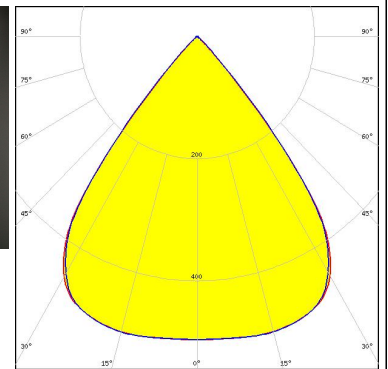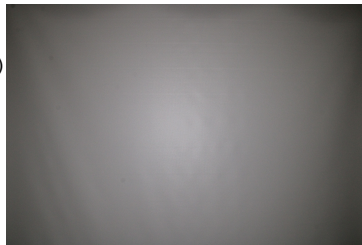

MST

Your solutions

LED LinLED 280x28mm 2x550lm 827-865 2x2C 42V Opt G1
FWHM / FWTM 74.0° / 94.0°
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour Tunable White
Required components:
C18167_DAISSY-7X1-SHD-MET

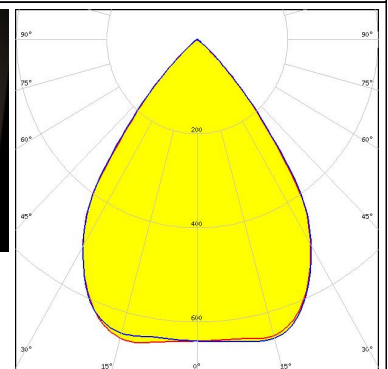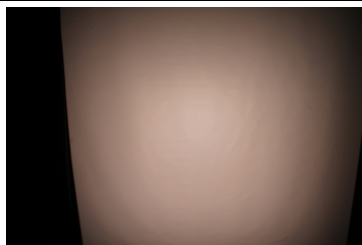


OPTICAL RESULTS (MEASURED):

MST

Your solutions


LED LinLED 280x28mm 2x550lm 827-865 2x2C 42V Opt G1
FWHM / FWTM 77.0° / 98.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour Tunable White
Required components:
C16876_DAISSY-7X1-SHD-WHT

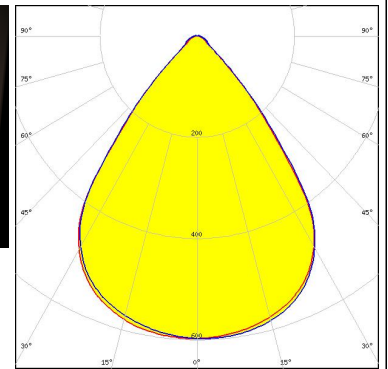

MST

Your solutions



LED LinLED 280x28mm 2x550lm 827-865 2x2C 42V Opt G1
FWHM / FWTM 75.0° / 95.0°
Efficiency 92 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour Tunable White
Required components:
C17533_DAISSY-7X1-SHD-MET-MATT

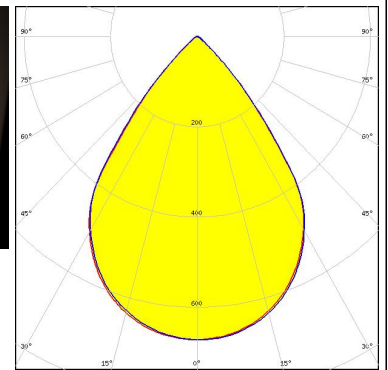

MST

Your solutions


LED LinLED 280x28mm 2x550lm 827-865 2x2C 42V Opt G1
FWHM / FWTM 75.0° / 94.0°
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour Tunable White
Required components:
C17051_DAISSY-7X1-SHD-MATT

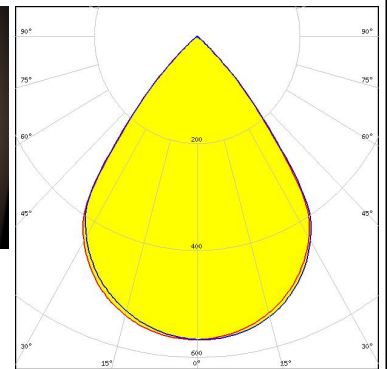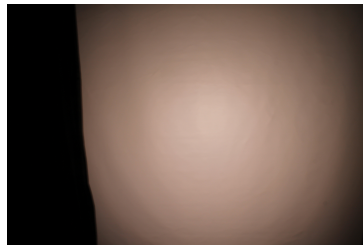

MST

Your solutions

LED LinLED 280x28mm 2x550lm 827-865 2x2C 42V Opt G1
FWHM / FWTM 77.0° / 98.0°
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour Tunable White
Required components:
C17225_DAISSY-7X1-SHD-WHT-MATT


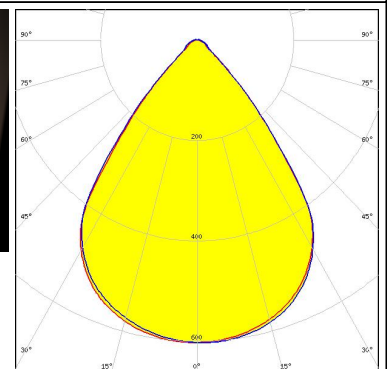


OPTICAL RESULTS (MEASURED):

MST



Your solutions

LED LinLED 280x28mm 2x550lm 827-865 2x2C 42V Opt G1
FWHM / FWTM 75.0° / 93.0°
Efficiency 79 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour Tunable White
Required components:
C16872_DAISSY-7X1-SHD

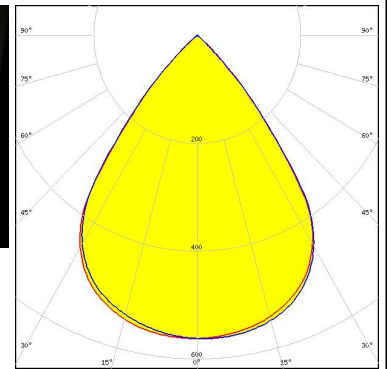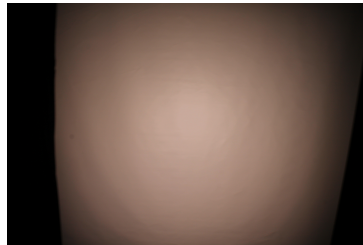



NICHIA

LED NF2W757G-MT (Tunable White)
FWHM / FWTM 80.0° / 95.0°
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour Tunable White
Required components:
C16876_DAISSY-7X1-SHD-WHT

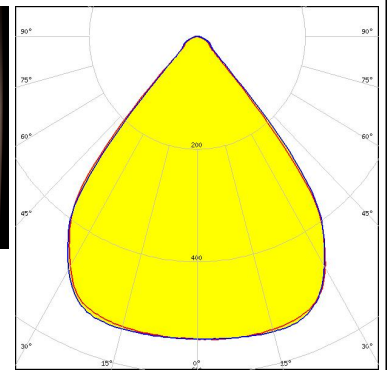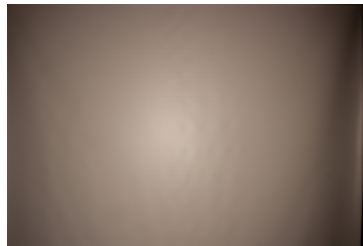



NICHIA

LED NF2W757G-MT (Tunable White)
FWHM / FWTM 80.0° / 90.0°
Efficiency 79 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour Tunable White
Required components:
C16872_DAISSY-7X1-SHD

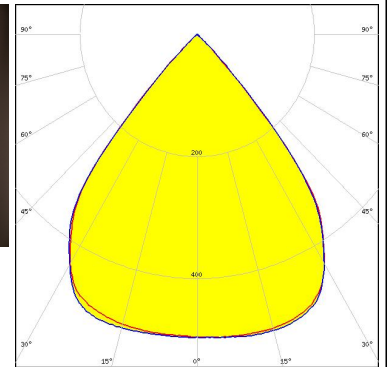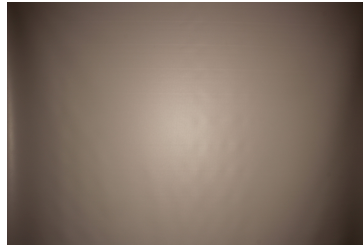

OSRAM

LED PL-LIN-2000 280x24mm
FWHM / FWTM 74.0° / 93.0°
Efficiency 77 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISSY-7X1-SHD-MATT

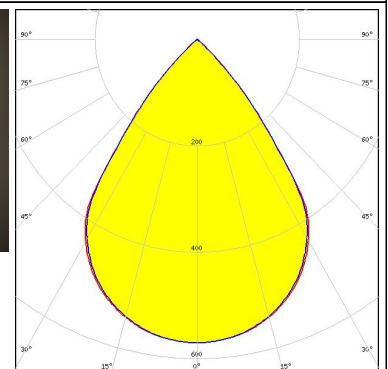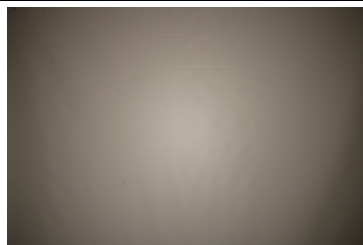


OPTICAL RESULTS (MEASURED):

OSRAM



Opto Semiconductors

LED OSCONIQ E 2835
FWHM / FWTM 74.0° / 93.0°
Efficiency 77 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISY-7X1-SHD-MATT

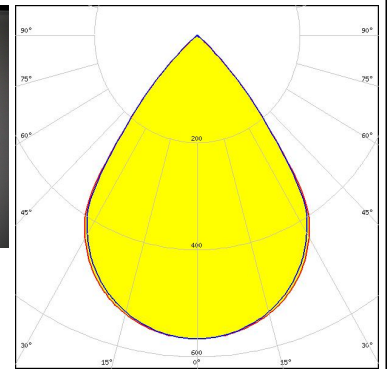



SAMSUNG

LED LM28xB Series
FWHM / FWTM 78.0° / 91.0°
Efficiency 79 %
Peak intensity 0.5 cd/lm
LEDs/each optic 2
Light colour White
Required components:
C16872_DAISY-7X1-SHD

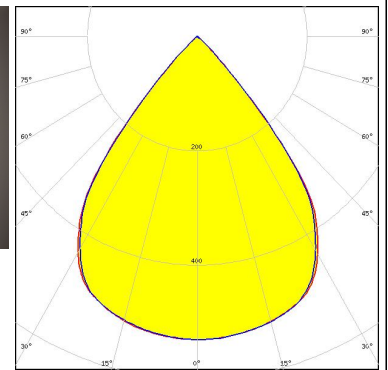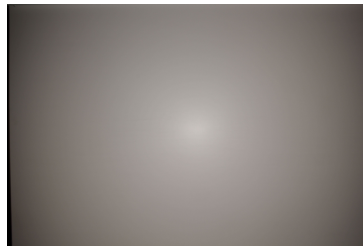



SAMSUNG

LED LM28xB Series
FWHM / FWTM 78.0° / 95.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 2
Light colour White
Required components:
C16876_DAISY-7X1-SHD-WHT

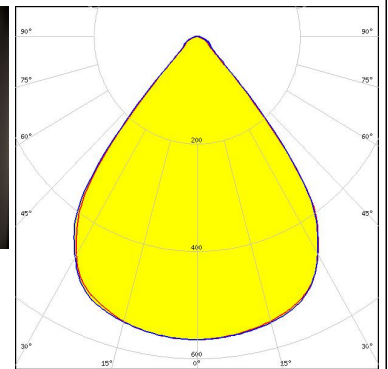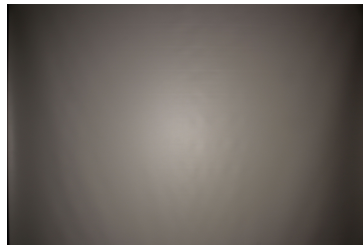

SAMSUNG

LED LM28xB Series
FWHM / FWTM 75.0° / 89.0°
Efficiency 73 %
Peak intensity 0.5 cd/lm
LEDs/each optic 2
Light colour White
Required components:
C17051_DAISY-7X1-SHD-MATT

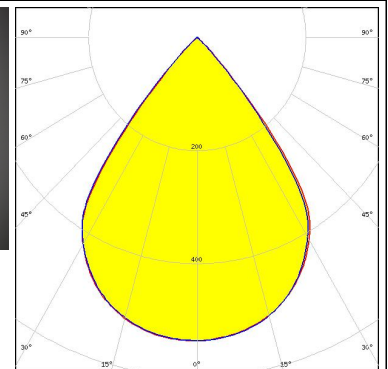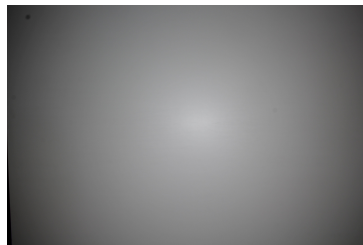

OPTICAL RESULTS (MEASURED):

<p>SEITEC Elektronik GmbH</p> <p>LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)</p> <p>FWHM / FWTM 76.0° / 97.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 0.6 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components: C17225_DAISY-7X1-SHD-WHT-MATT</p>		
<p>SEITEC Elektronik GmbH</p> <p>LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)</p> <p>FWHM / FWTM 75.0° / 92.0°</p> <p>Efficiency 78 %</p> <p>Peak intensity 0.6 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components: C16872_DAISY-7X1-SHD</p>		
<p>SEITEC Elektronik GmbH</p> <p>LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)</p> <p>FWHM / FWTM 74.0° / 93.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.7 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components: C18167_DAISY-7X1-SHD-MET</p>		
<p>SEITEC Elektronik GmbH</p> <p>LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)</p> <p>FWHM / FWTM 76.0° / 98.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 0.6 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components: C16876_DAISY-7X1-SHD-WHT</p>		



OPTICAL RESULTS (MEASURED):

<p>SEITEC Elektronik GmbH</p> <p>LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)</p> <p>FWHM / FWTM 74.0° / 94.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 0.7 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components: C17533_DAISSY-7X1-SHD-MET-MATT</p>		
<p>SEITEC Elektronik GmbH</p> <p>LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)</p> <p>FWHM / FWTM 75.0° / 93.0°</p> <p>Efficiency 77 %</p> <p>Peak intensity 0.6 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components: C17051_DAISSY-7X1-SHD-MATT</p>		
<p>TEPCOMP group</p> <p>LED PassivePAQ-L-1F35-SSA3-2.7K-840-3-DC</p> <p>FWHM / FWTM 76.0° / 100.0°</p> <p>Efficiency 90 %</p> <p>Peak intensity 0.6 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C17225_DAISSY-7X1-SHD-WHT-MATT</p>		
<p>TEPCOMP group</p> <p>LED PassivePAQ-L-1F35-SSA3-2.7K-840-3-DC</p> <p>FWHM / FWTM 75.0° / 96.0°</p> <p>Efficiency 76 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C17051_DAISSY-7X1-SHD-MATT</p>		



OPTICAL RESULTS (MEASURED):



LED PassivePAQ-L-1F35-SSA3-2.7K-840-3-DC
 FWHM / FWTM 75.0° / 96.0°
 Efficiency 76 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16872_DAISY-7X1-SHD

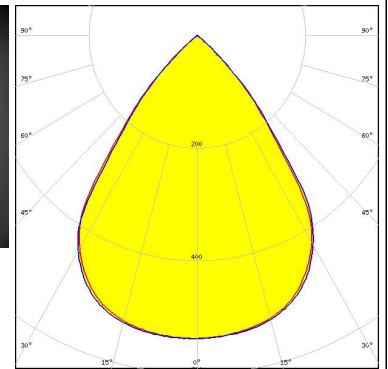
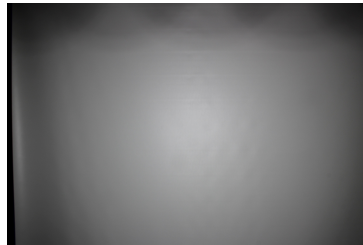


LED PassivePAQ-L-1F35-SSA3-2.7K-840-3-DC
 FWHM / FWTM 76.0° / 100.0°
 Efficiency 91 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16876_DAISY-7X1-SHD-WHT

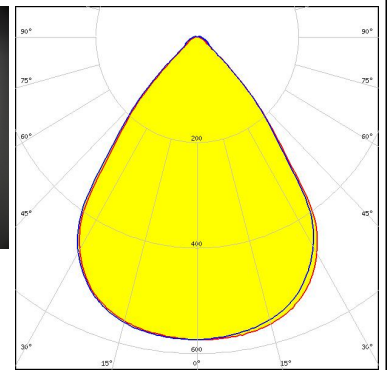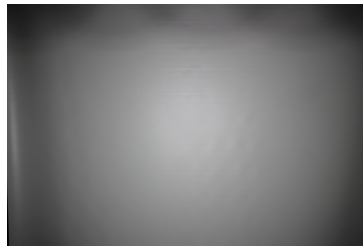



TRIDONIC

LED LLE 24x280mm 750lm 8x0 LVD ADV1
 FWHM / FWTM 75.0° / 94.0°
 Efficiency 77 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17051_DAISY-7X1-SHD-MATT

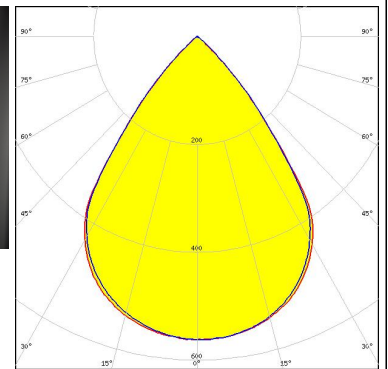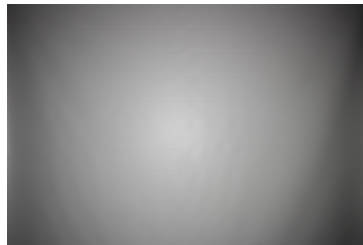

TRIDONIC



LED LLE 24x280mm 750lm 8x0 LVD ADV1
 FWHM / FWTM 75.0° / 93.0°
 Efficiency 78 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16872_DAISY-7X1-SHD

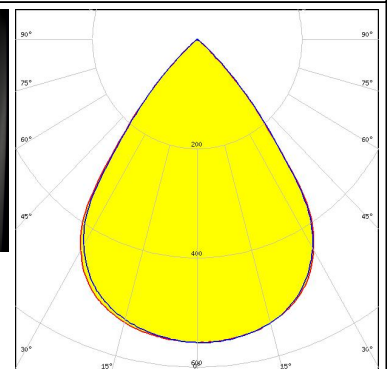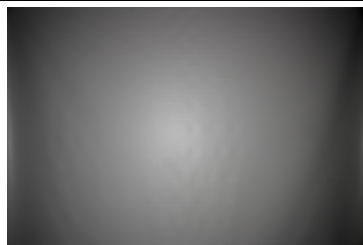

OPTICAL RESULTS (MEASURED):



TRIDONIC

LED LLE 24x280mm 750lm 8x0 LVD ADV1
 FWHM / FWTM 75.0° / 98.0°
 Efficiency 91 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16876_DAISY-7X1-SHD-WHT

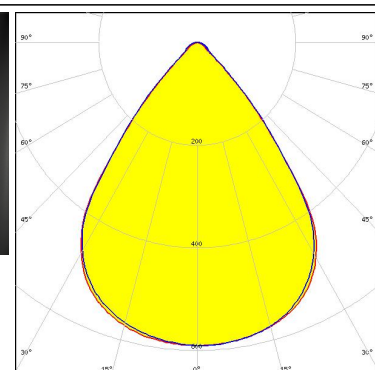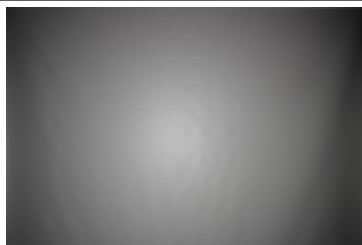

TRIDONIC


LED LLE 24x280mm 750lm 8x0 LVD ADV1
 FWHM / FWTM 76.0° / 98.0°
 Efficiency 91 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17225_DAISY-7X1-SHD-WHT-MATT

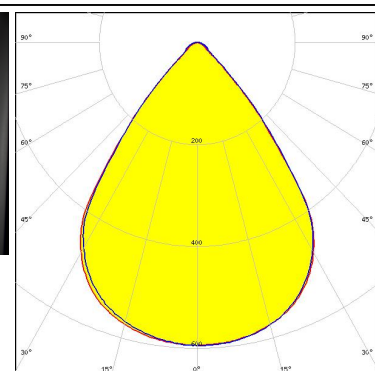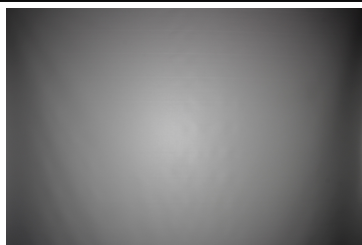


OPTICAL RESULTS (SIMULATED):




LED J Series 2835
FWHM / FWTM 75.0° / 94.0°
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16872_DAISSY-7X1-SHD

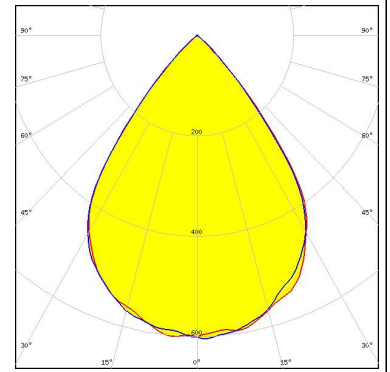


LED LUXEON 2835 Line
FWHM / FWTM 75.0° / 92.0°
Efficiency 90 %
Peak intensity 0.7 cd/lm
LEDs/each optic 3
Light colour RGB
Required components:
C18167_DAISSY-7X1-SHD-MET

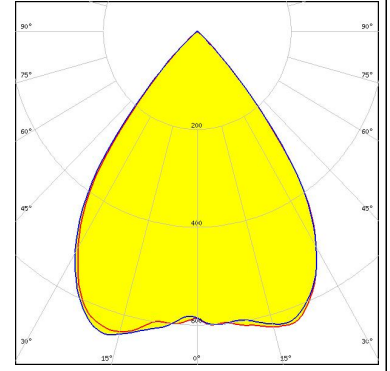

LED LUXEON 2835 Line
FWHM / FWTM 76.0° / 92.0°
Efficiency 75 %
Peak intensity 0.5 cd/lm
LEDs/each optic 3
Light colour RGB
Required components:
C17051_DAISSY-7X1-SHD-MATT

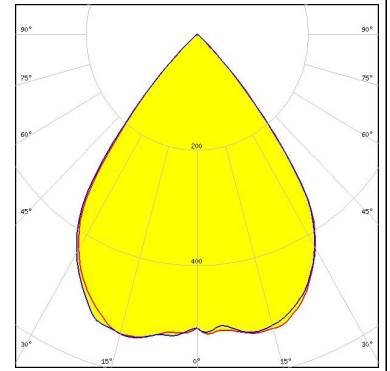


LED LUXEON 2835 Line
FWHM / FWTM 74.0° / 91.0°
Efficiency 88 %
Peak intensity 0.7 cd/lm
LEDs/each optic 3
Light colour RGB
Required components:
C17225_DAISSY-7X1-SHD-WHT-MATT

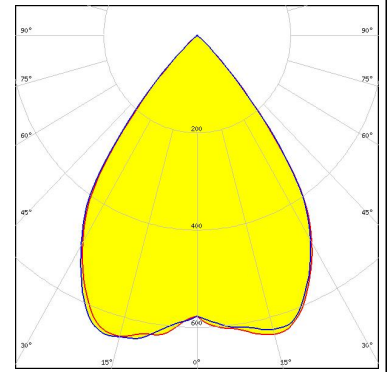

OPTICAL RESULTS (SIMULATED):


OSRAM Opto Semiconductors

LED Duris E 2835
FWHM / FWTM 74.0° / 94.0°
Efficiency 85 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISY-7X1-SHD-MATT

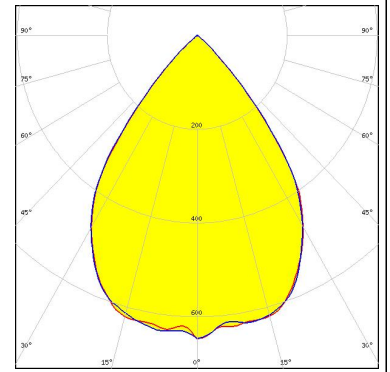


OSRAM Opto Semiconductors

LED Duris E 2835
FWHM / FWTM 74.0° / 94.0°
Efficiency 92 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT

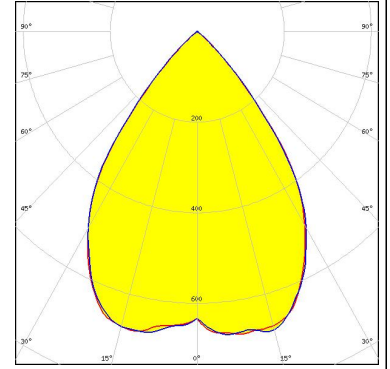


OSRAM Opto Semiconductors

LED Duris S8
FWHM / FWTM 76.0° / 90.0°
Efficiency 79 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16872_DAISY-7X1-SHD

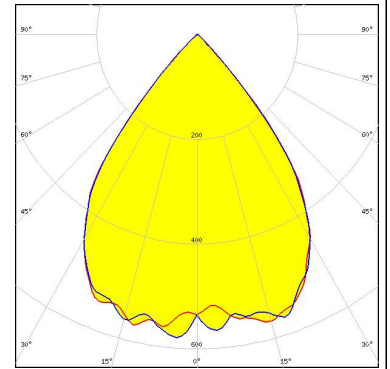

OSRAM Opto Semiconductors

LED OSCONIQ S 5050
FWHM / FWTM 76.0° / 90.0°
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16872_DAISY-7X1-SHD

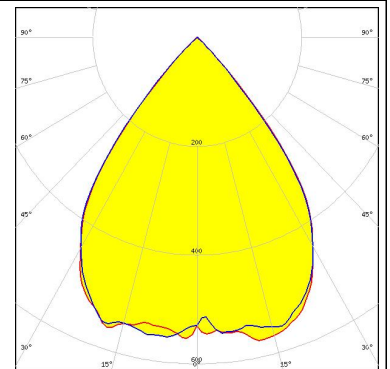


OPTICAL RESULTS (SIMULATED):

OSRAM

Opto Semiconductors


LED OSLON PURE 1010
FWHM / FWTM 74.0° / 92.0°
Efficiency 82 %
Peak intensity 0.6 cd/lm
LEDs/each optic 8
Light colour White
Required components:
C16872_DAISY-7X1-SHD

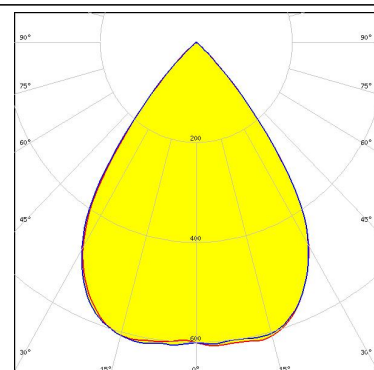

OSRAM


Opto Semiconductors

LED OSLON PURE 1010
FWHM / FWTM 74.0° / 86.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT

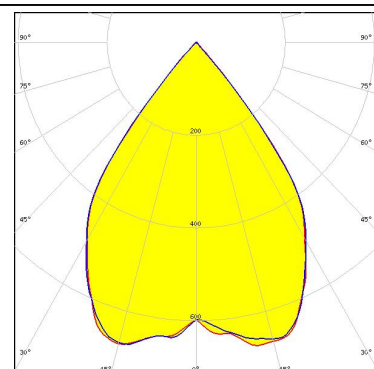


SAMSUNG

LED LM101B
FWHM / FWTM 74.0° / 88.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT

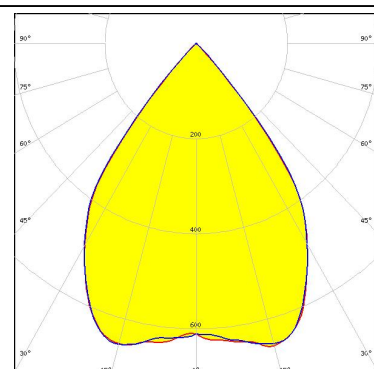

SAMSUNG


LED LM101B
FWHM / FWTM 75.0° / 88.0°
Efficiency 88 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C18167_DAISY-7X1-SHD-MET

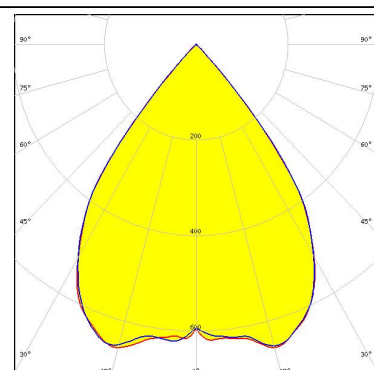

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LM101B
FWHM / FWTM 76.0° / 88.0°
Efficiency 75 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISY-7X1-SHD-MATT

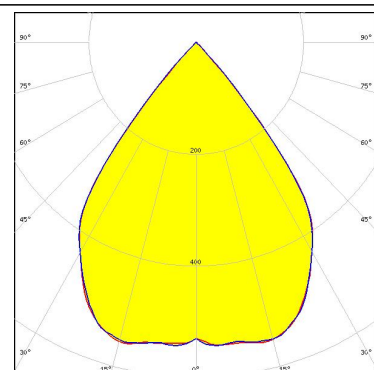


SAMSUNG

LED LM301D
FWHM / FWTM 74.0° / 90.0°
Efficiency 91 %
Peak intensity 0.7 cd/lm
LEDs/each optic 2
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT

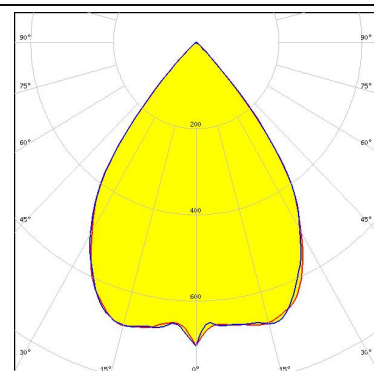


SAMSUNG

LED LM301D
FWHM / FWTM 74.0° / 92.0°
Efficiency 91 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT

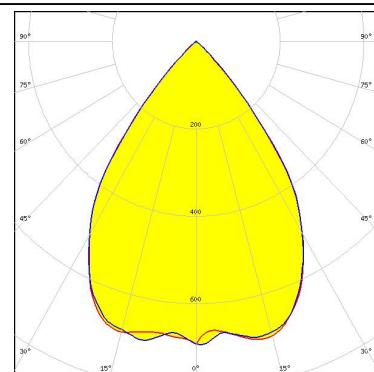

SAMSUNG


LED LM301Z Plus
FWHM / FWTM 74.0° / 92.0°
Efficiency 75 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISY-7X1-SHD-MATT

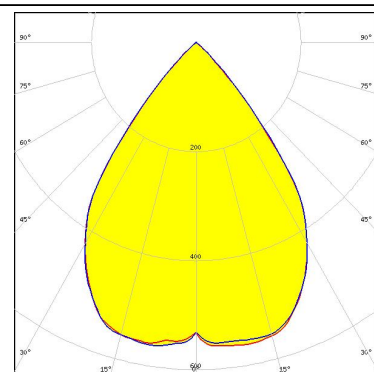

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LM301Z Plus
FWHM / FWTM 74.0° / 92.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISSY-7X1-SHD-WHT-MATT

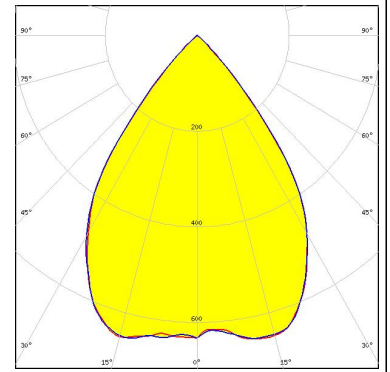


SAMSUNG

LED LM301Z Plus
FWHM / FWTM 74.0° / 92.0°
Efficiency 88 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C18167_DAISSY-7X1-SHD-MET

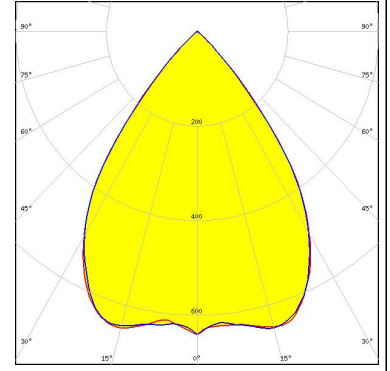


SEOUL SEMICONDUCTOR

LED SEOUL DC 3030C
FWHM / FWTM 75.0° / 94.0°
Efficiency 80 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16872_DAISSY-7X1-SHD

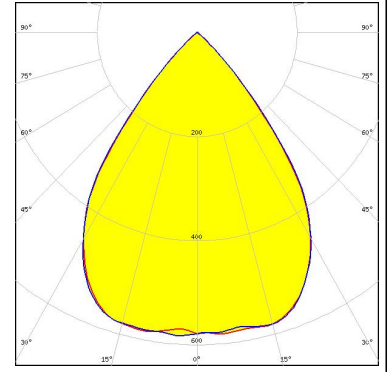

SEOUL SEMICONDUCTOR


LED SEOUL DC 3528
FWHM / FWTM 78.0° / 90.0°
Efficiency 78 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16872_DAISSY-7X1-SHD

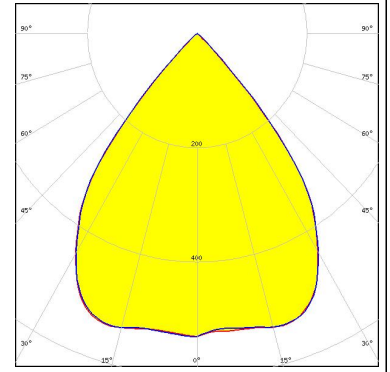

OPTICAL RESULTS (SIMULATED):

TRIDONIC

LED	LLE 24x280mm 750lm 8x0 LVD ADV1
FWHM / FWTM	72.0° / 92.0°
Efficiency	88 %
Peak intensity	0.7 cd/lm
LEDs/each optic	4
Light colour	White
Required components:	
	C17533_DAISY-7X1-SHD-MET-MATT

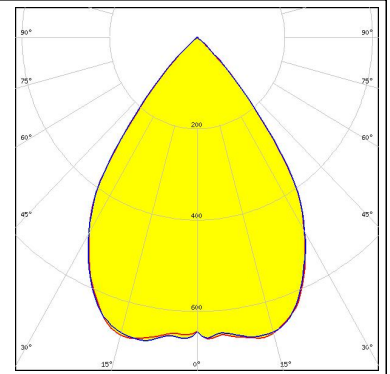

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)