

ILCX13 Series




Product Feature:

SMD Package
Small package Foot Print
Supplied in Tape and Reel
Compatible with Leadfree
Processing

Applications:

PCMCIA Cards
Storage
PC's
Wireless Lan


Frequency	10 MHz to 150 MHz
ESR (Equivalent Series Resistance) 10.0 MHz – 11.9 MHz 12.0 MHz – 15.6 MHz 16.0 MHz – 19.9 MHz 20.0 MHz – 23.9 MHz 24.0 MHz – 60.0 MHz 60.0 MHz – 150.0 MHz (3 rd O/T)	250 Ohms Maximum 100 Ohms Maximum 80 Ohms Maximum 60 Ohms Maximum 40 Ohms Maximum 100 Ohms Maximum
Shunt Capacitance (C0)	3.5pF Maximum
Frequency Tolerance @ 25° C	(See Part Number Guide)
Frequency Stability over Temperature	(See Part Number Guide)
Crystal Cut	AT Cut
Load Capacitance	8pF to 32pF or Specify
Drive Level	100µW Maximum
Aging	±3ppm/Year Maximum
Operating Temperature Range	(See Part Number Guide)
Storage Temperature Range	-40°C to +85°C

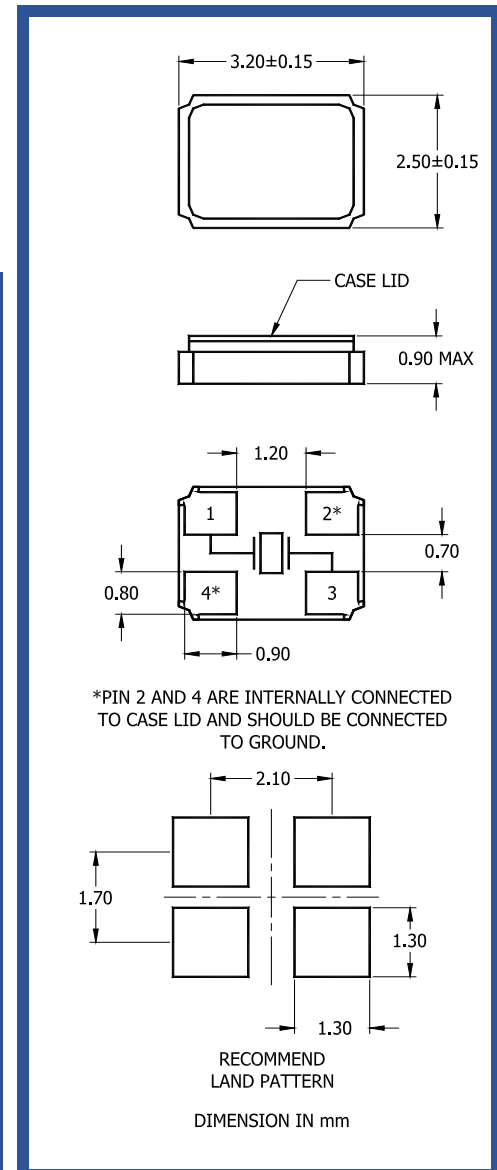

Part Number Guide		Sample Part Number: ILCX13 - FB1F18 - 20.000000 MHz				
Package	Tolerance (ppm) at Room Temperature	Stability (ppm) over Operating Temperature	Operating Temperature Range	Mode (overtone)	Load Capacitance (pF)	Frequency
ILCX13 -	B = ±50 ppm	B = ±50 ppm	0 = 0°C to +50°C	F = Fundamental	8pF to 32pF Or Specify	- 20.000 MHz
	F = ±30 ppm	F = ±30 ppm	1 = 0°C to +70°C	3 = 3 rd overtone		
	G = ±25 ppm	G = ±25 ppm	2 = -10°C to +60°C			
	H = ±20 ppm	H = ±20 ppm	3 = -20°C to +70°C			
	I = ±15 ppm	I = ±15 ppm**	5 = -40°C to +85°C			
	J = ±10 ppm*	J = ±10 ppm**	9 = -10°C to +50°C			
			D = -10°C to +105°C*			
			E = -40°C to +105°C*			

* Not available at all frequencies. ** Not available for all temperature ranges.

Pb Free Solder Reflow Profile:

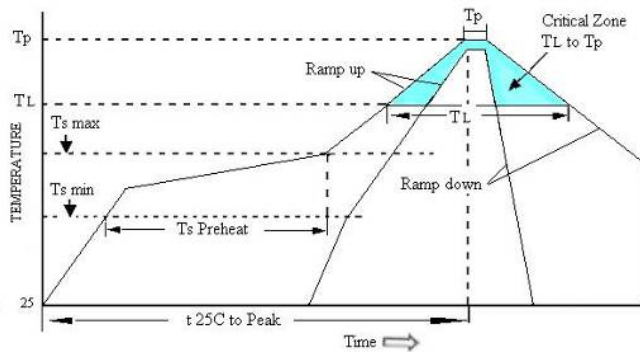

Units are backward compatible with 240C reflow processes


Ts max to T _L (Ramp-up Rate)	3°C / second max
Preheat	
Temperature min (Ts min)	150°C
Temperature typ (Ts typ)	175°C
Temperature max (Ts max)	200°C
Time (Ts)	60 to 180 seconds
Ramp-up Rate (T _L to T _p)	3°C / second max
Time Maintained Above Temperature (T _L)	217°C
Time (T _L)	60 to 150 seconds
Peak Temperature (T _p)	260°C max for 10 seconds
Time within 5°C to Peak Temperature (T _p)	20 to 40 seconds
Ramp-down Rate	6°C / second max
Time 25°C to Peak Temperature	8 minutes max

Package Information:

MSL = 1

Termination = e4 (Au over Ni over W base metal).

Tape and Reel Information:

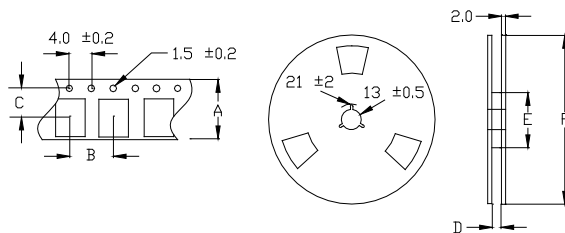

Quantity per Reel	3000
A	8.0 ±0.2
B	4.0 ±0.2
C	3.5 ±0.2
D	12.0 ±3.0
E	60 / 80
F	180