




TE Internal #: 1-1823440-1
Housing for Female Terminals, Wire-to-Wire, 22 Position, .157 in / .236 in [6 mm / 4 mm] Centerline, Sealable, Black, Signal
[View on TE.com >](#)

Connectors > Automotive Connectors > Automotive Housings

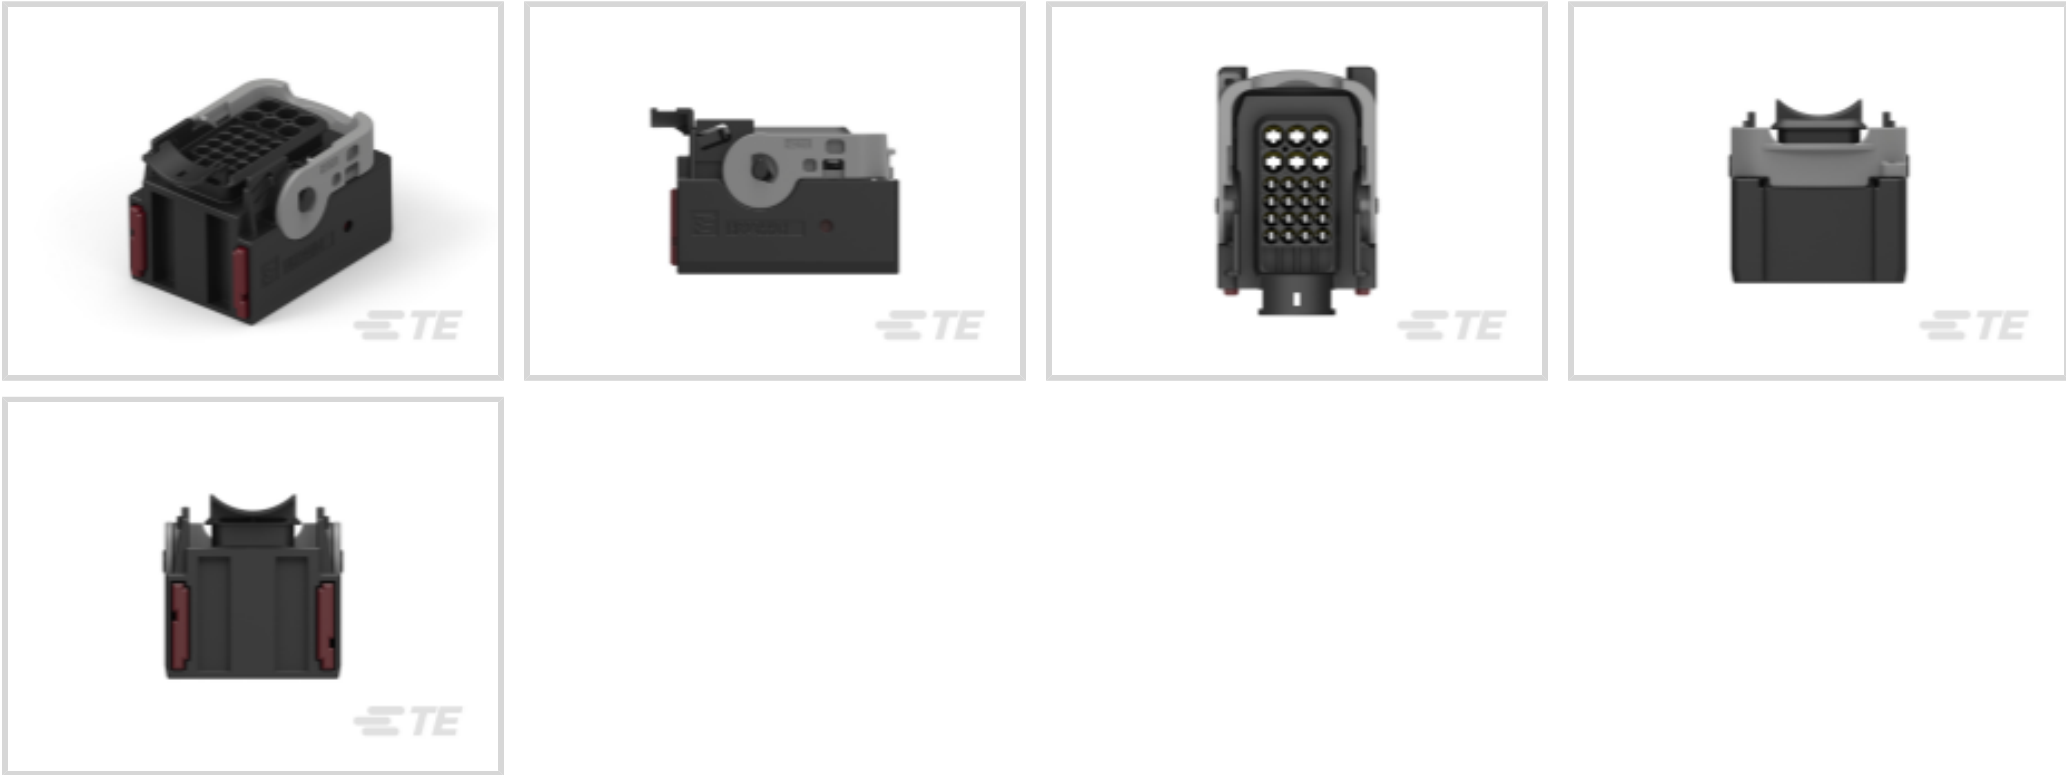

Connector System: **Wire-to-Wire**
Number of Positions: **22**
Connector & Housing Type: **Housing for Female Terminals**
Centerline (Pitch): **4 mm, 6 mm [.157 in, .236 in]**
Sealable: **Yes**

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	On the Terminal

Configuration Features

Blank Cavity Position	0
Number of Positions	22
Number of Rows	3, 4

Electrical Characteristics

Operating Voltage	42 VDC
Nominal Voltage Architecture	12 V, 24 V, 42 V

Body Features

Cable Exit Angle	90°
------------------	-----



Primary Product Color	Black
Connector & Keying Code	A

Contact Features

Contact Size	1.5K, 2.8mm
Contact Type	Receptacle
Mating Tab Width	1.6 mm, 2.8 mm[.063 in][.11 in]

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	With
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	4 mm, 6 mm[.157 in][.236 in]

Dimensions

Connector Height	37 mm[1.457 in]
Product Width	42.5 mm[1.673 in]
Product Length	69.7 mm[2.744 in]
Row-to-Row Spacing	6 mm[.236 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Degree of Protection	IP67
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	200
--------------------	-----



Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2112452-1
COVER, FOR 22POS



TE Part # 828905-1
SINGLE-WIRE-SEAL(5MM HOLE)



TE Part # CAT-AM705-T273
AMP MCP, RECEPTACLE AND TAB



TE Part # 1823444-1
ADAPTER, FOR A-PILLAR, ASSY





TE Part # 828904-1
SINGLE WIRE SEAL FOR J.P.T.CON



TE Part # 2112452-2
COVER, FOR 22POS

TE Part # 1-1823448-1
22POS, MIXED, TAB HSG, ASSY, SEALED

Customers Also Bought



TE Part #776536-4
AS 16, 4P CAP ASSY, RD, KEY 4



TE Part #2302494-3
SOC CONN CVRASSY, 2POS, AMPSEAL16, 90DEG, MC



TE Part #1-2236343-1
3POS, MCON 1.2 LL REC SEALED



TE Part #1-2236896-1
2POS, MCON 1.2 LL REC SEALED



TE Part #1544334-3
PL 2V 8MM NG1 MONT



TE Part #1544650-3
PC 2V 8MM GRIS JT



TE Part #1801466-1
COVER, FIXED, 2 WAY HP CONNECTOR



TE Part #2348770-2
HD MATEnet - COVER FOR SWS



TE Part #9-2354261-1
HD MATEnet 1+2 REC HSG ASSY, GRP C



TE Part #4-1579002-2
STRIPPING TOOL SOLARLOK

Documents

Product Drawings
22POS, MIXED, REC HSG, ASSY, SEALED
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1-1823440-1_A.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_1-1823440-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1823440-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

[Product Specifications](#)

[Application Specification](#)

German