
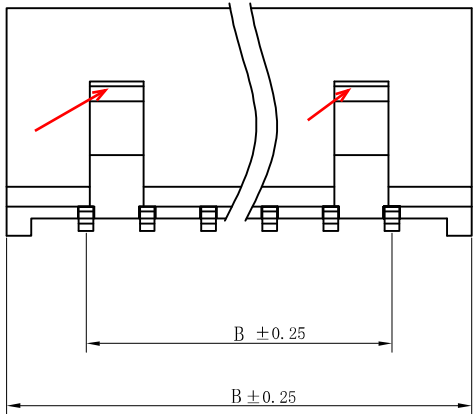
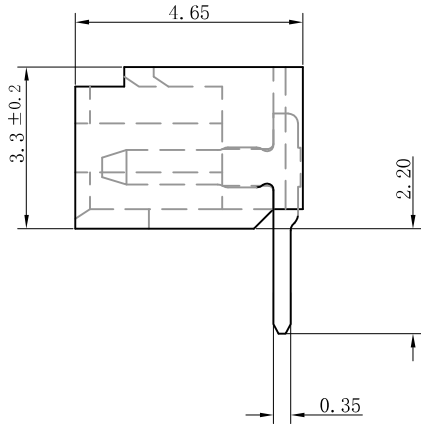


版次	日期	变更内容	变更单号	变更者

PITCH 1.25mm BAR CONNECTOR WAFER

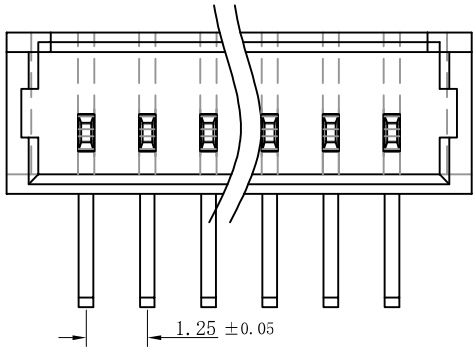

- 技术说明:
Craft specifications
- 1.材质 Material: Metal part, H62-Y2, Brass Tin/Plated; Plastic part, PBT, UL94V-0.
 - 2.铜针固定力 Pin retention Force $\geq 12\text{N}$
 - 3.额定电流 Current rating: 3.0A AC, DC
 - 4.额定电压 Voltage rating: 250V AC, DC
 - 5.温度范围 Temperature range: -25°C to 85°C
 - 6.接触电阻 Contact resistance: $\leq 10\text{ m}\Omega$
 - 7.绝缘电阻 Insulation resistance: $\geq 1000\text{ M}\Omega$
 - 8.耐压 Withstand voltage: 800V AC/minute

孔位	2	3	4	5	6	7	8	9
A	1.25	2.50	3.75	5.00	6.25	7.50	8.75	10.0
B	4.4	5.65	6.9	8.15	9.4	10.65	11.9	13.15
孔位	10	11	12	13	14	15	16	
A	11.25	12.50	13.75	15.0	16.25	17.5	18.75	
B	14.4	15.65	16.9	18.15	19.4	20.65	21.9	

TOLERANCE: UNLESS OTHERWISE SPECIFIED		
UNDER 1.5 $\pm$ 0.05	1.5~4 $\pm$ 0.1	OVER 5 $\pm$ 0.3

博穆电子有限公司				1.25T-nPWL	
一般角度公差为 $\pm 1^{\circ}$	绘制			图号	
	审查			比例	FIT
	核准			单位	mm
	供应商			页次	1 of 1