

# Relay interface modules 6 - 7 - 10 A



Control panels



Packaging  
machines



Shipyards



Textile  
machines



Carousel  
warehouses





Panels for electrical  
distribution



Hoists and cranes



Wood-processing  
machines

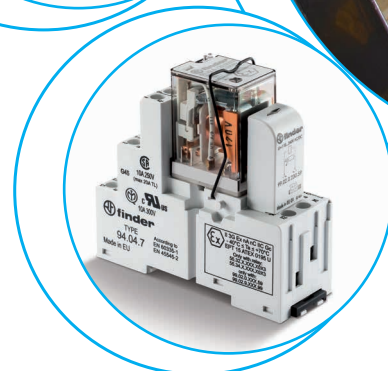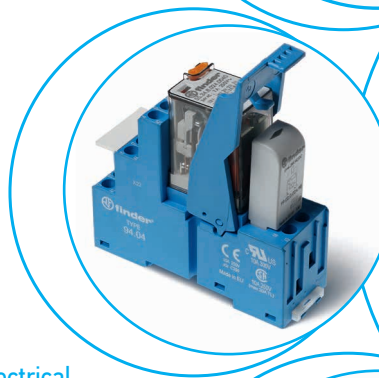



**3 & 4 CO relay interface modules,  
31 mm wide with Push-in terminals**  
**Ideal interface for PLC and electronic systems**

**Type 58.P3**

- 3 CO 10 A
- Push-in terminals

**Type 58.P4**

- 4 CO 7 A
- Push-in terminals

- AC coils or DC coils
- Supply status indication and EMC coil suppression module as standard
- Identification label
- Cadmium Free contacts
- UL Listing (certain relay/socket combinations)
- **ATEX** compliant (Ex ec nC) option available
- **HazLoc** Class I Div. 2 Groups A, B, C, D - T5\* option available
- 35 mm rail (EN 60715) mounting

58.P3/58.P4  
Push-in terminals



\* Characteristics page 7, 8

For outline drawing see page 10

**Contact specification**

Contact configuration		3 CO (3PDT)	4 CO (4PDT)
Rated current/Maximum peak current	A	10/20	7/15
Rated voltage/ Maximum switching voltage	V AC	250/400	250/250
Rated load AC1	VA	2500	1750
Rated load AC15 (230 V AC)	VA	500	350
Single phase motor rating (230 V AC)	kW	0.55	0.24
Breaking capacity DC1: 24/110/220 V	A	10/0.5/0.25	7/0.5/0.25
Minimum switching load	mW (V/mA)	300 (5/5)	300 (5/5)
Standard contact material		AgNi	AgNi


**Coil specification**

Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	12 - 24 - 48 - 110 - 120 - 230	12 - 24 - 48 - 110 - 120 - 230
	V DC	12 - 24 - 48 - 125	12 - 24 - 48 - 125
Rated power AC/DC	VA (50 Hz)/W	1.5/1	1.5/1
Operating range	AC	(0.8...1.1)U <sub>N</sub>	(0.8...1.1)U <sub>N</sub>
	DC	(0.8...1.1)U <sub>N</sub>	(0.8...1.1)U <sub>N</sub>
Holding voltage	AC/DC	0.8 U <sub>N</sub> / 0.5 U <sub>N</sub>	0.8 U <sub>N</sub> / 0.5 U <sub>N</sub>
Must drop-out voltage	AC/DC	0.2 U <sub>N</sub> / 0.1 U <sub>N</sub>	0.2 U <sub>N</sub> / 0.1 U <sub>N</sub>

**Technical data**


Mechanical life AC/DC	cycles	20 · 10 <sup>6</sup> / 50 · 10 <sup>6</sup>	20 · 10 <sup>6</sup> / 50 · 10 <sup>6</sup>
Electrical life at rated load AC1	cycles	200 · 10 <sup>3</sup>	150 · 10 <sup>3</sup>
Operate/release time	ms	10/5 (AC) - 10/15 (DC)	11/3 (AC) - 11/15 (DC)
Insulation between coil and contacts (1.2/50 μs)	kV	3.6	3.6
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature range	°C	-40...+70	-40...+70
Protection category		IP 20	IP 20

**Approvals** (according to type)



**58.P3**

- 3 CO 10 A
- Push-in terminals




Example: AC



**58.P4**

- 4 CO 7 A
- Push-in terminals



Example: DC



B

**2, 3 & 4 CO relay interface modules,  
27 mm wide with Box clamp**

**Ideal interface for PLC and electronic systems**

**Type 58.32**

- 2 CO 10 A
- Box clamp

**Type 58.33**

- 3 CO 10 A
- Box clamp

**Type 58.34**

- 4 CO 7 A
- Box clamp


- AC coils or DC coils
- Supply status indication and EMC coil suppression module as standard
- Identification label
- Cadmium Free contacts
- UL Listing (certain relay/socket combinations)
- 35 mm rail (EN 60715) mounting

58.32/58.33/58.34  
Box clamp




For outline drawing see page 10

**58.32**



- 2 CO 10 A
- Box clamp




Example: AC

**58.33**




- 3 CO 10 A
- Box clamp




Example: DC

**58.34**



- 4 CO 7 A
- Box clamp



Example: AC

**Contact specification**

Contact configuration		2 CO (DPDT)	3 CO (3PDT)	4 CO (4PDT)
Rated current/Maximum peak current	A	10/20	10/20	7/15
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400	250/250
Rated load AC1	VA	2500	2500	1750
Rated load AC15 (230 V AC)	VA	500	500	350
Single phase motor rating (230 V AC)	kW	0.55	0.55	0.24
Breaking capacity DC1: 24/110/220 V	A	10/0.5/0.25	10/0.5/0.25	7/0.5/0.25
Minimum switching load	mW (V/mA)	300 (5/5)	300 (5/5)	300 (5/5)
Standard contact material		AgNi	AgNi	AgNi

**Coil specification**

Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	12 - 24 - 48 - 110 - 120 - 230	12 - 24 - 48 - 110 - 120 - 230	12 - 24 - 48 - 110 - 120 - 230
	V DC	12 - 24 - 48 - 125	12 - 24 - 48 - 125	12 - 24 - 48 - 125
Rated power AC/DC	VA (50 Hz)/W	1.5/1	1.5/1	1.5/1
Operating range	AC	(0.8...1.1)U <sub>N</sub>	(0.8...1.1)U <sub>N</sub>	(0.8...1.1)U <sub>N</sub>
	DC	(0.8...1.1)U <sub>N</sub>	(0.8...1.1)U <sub>N</sub>	(0.8...1.1)U <sub>N</sub>
Holding voltage	AC/DC	0.8 U <sub>N</sub> / 0.5 U <sub>N</sub>	0.8 U <sub>N</sub> / 0.5 U <sub>N</sub>	0.8 U <sub>N</sub> / 0.5 U <sub>N</sub>
Must drop-out voltage	AC/DC	0.2 U <sub>N</sub> / 0.1 U <sub>N</sub>	0.2 U <sub>N</sub> / 0.1 U <sub>N</sub>	0.2 U <sub>N</sub> / 0.1 U <sub>N</sub>

**Technical data**

Mechanical life AC/DC	cycles	20 · 10 <sup>6</sup> / 50 · 10 <sup>6</sup>	20 · 10 <sup>6</sup> / 50 · 10 <sup>6</sup>	20 · 10 <sup>6</sup> / 50 · 10 <sup>6</sup>
Electrical life at rated load AC1	cycles	200 · 10 <sup>3</sup>	200 · 10 <sup>3</sup>	150 · 10 <sup>3</sup>
Operate/release time	ms	10/5 (AC) - 10/15 (DC)	10/5 (AC) - 10/15 (DC)	11/3 (AC) - 11/15 (DC)
Insulation between coil and contacts (1.2/50 μs)	kV	3.6	3.6	3.6
Dielectric strength between open contacts	V AC	1000	1000	1000
Ambient temperature range	°C	-40...+70	-40...+70	-40...+70
Protection category		IP 20	IP 20	IP 20

**Approvals** (according to type)



**2, 3 or 4 CO relay interface modules IECEx, 27 mm wide with Box clamp or sockets version with Push-in terminals**

**IECEX - ATEX certification: II 3G Ex ec nC IIC Gc HazLoc certification: Class I Div. 2 Groups A, B, C, D - T5\***

**Type 58.32 - x0xx**  
- 2 CO 10 A  
- Box clamp  
- Push-in terminals sockets version (94.P2.7) available

**Type 58.33 - x0xx**  
- 3 CO 8.5 A  
- Box clamp  
- Push-in terminals sockets version (94.P3.7) available

**Type 58.34 - x0xx**  
- 4 CO 6 A  
- Box clamp  
- Push-in terminals sockets version (94.P4.7) available

- AC coils or DC coils
- Supply status indication and EMC coil suppression module as standard
- Mechanical indicator - optional on 2 & 4 CO types
- Identification label
- Cadmium Free contacts
- UL Listed
- Complies with:
  - EN IEC 60079-0:2018;
  - EN IEC 60079-7:2015+A1:2018;
  - EN 60079-15:2010;
  - EN IEC 60079-15:2019
- 35 mm rail (EN 60715) mounting

58.32/58.34 - x0xx  
Box clamp




\* Characteristics page 7, 8  
For outline drawing see page 10

**Contact specification**


Contact configuration		2 CO (DPDT)	4 CO (4PDT)
Rated current/Maximum peak current**	A	10/20	6/15
Rated voltage/Maximum switching voltage	V AC	250/400	250/250
Rated load AC1	VA	2500	1500
Rated load AC15 (230 V AC)	VA	500	350
Single phase motor rating (230 V AC)	kW	0.55	0.24
Breaking capacity DC1: 24/110/220 V	A	10/0.25/0.12	6/0.25/0.12
Minimum switching load	mW (V/mA)	300 (5/5)	300 (5/5)
Standard contact material		AgNi	AgNi
<b>Coil specification</b>			
Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	12 - 24 - 48 - 110 - 120 - 230	12 - 24 - 48 - 110 - 120 - 230
	V DC	12 - 24 - 48 - 125	12 - 24 - 48 - 125
Rated power AC/DC	VA (50 Hz)/W	1.5/1	1.5/1
Operating range	AC	(0.8...1.1)U <sub>N</sub>	(0.8...1.1)U <sub>N</sub>
	DC	(0.8...1.1)U <sub>N</sub>	(0.8...1.1)U <sub>N</sub>
Holding voltage	AC/DC	0.8 U <sub>N</sub> / 0.5 U <sub>N</sub>	0.8 U <sub>N</sub> / 0.5 U <sub>N</sub>
Must drop-out voltage	AC/DC	0.2 U <sub>N</sub> / 0.1 U <sub>N</sub>	0.2 U <sub>N</sub> / 0.1 U <sub>N</sub>
<b>Technical data</b>			
Mechanical life AC/DC	cycles	20 · 10 <sup>6</sup> / 50 · 10 <sup>6</sup>	20 · 10 <sup>6</sup> / 50 · 10 <sup>6</sup>
Electrical life at rated load AC1	cycles	150 · 10 <sup>3</sup>	150 · 10 <sup>3</sup>
Operate/release time	ms	11/3 (AC) - 11/15 (DC)	11/3 (AC) - 11/15 (DC)
Insulation between coil and contacts (1.2/50 μs)	kV	3.6	3.6
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature range	°C	-40...+70**	-40...+70**
Protection category		IP 20	IP 20

**Approvals** (according to type)



**58.32 - x0xx**


- 2 CO 10 A
- Box clamp
- IECEx, ATEX, Hazardous Location compliant

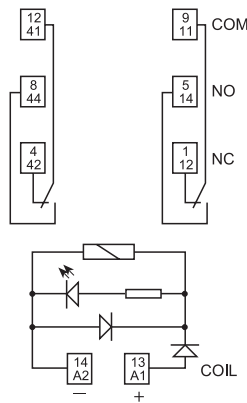

Example: DC

**58.34 - x0xx**

- 4 CO 6 A
- Box clamp
- IECEx, ATEX, Hazardous Location compliant

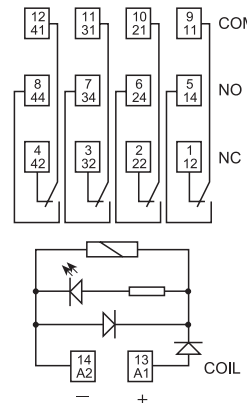

Example: DC

\*\* See page 7 for details of rated current and ambient temperature approval characteristic

### Ordering information

Example: 58 series, 35 mm rail (EN 60715) mounting, Push-in terminals interface module, 4 CO, 24 V DC coil, green LED + diode.

**B** Series — 5 8 . P 4 . 9 . 0 2 4 . 0 0 5 0

**Type**  
3 = Box clamp  
35 mm rail (EN 60715) mount  
P = Push-in terminals  
35 mm rail (EN 60715) mount

**No. of poles**  
2 = 2 pole, 10 A  
3 = 3 pole, 10 A  
4 = 4 pole, 7 A

**Coil version**  
8 = AC (50/60 Hz)  
9 = DC

**Coil voltage**  
See coil specifications

**A: Contact material**  
0 = AgNi Standard  
5 = AgNi + Au

**B: Contact circuit**  
0 = CO (nPDT)

**C: Options**  
5 = Standard DC: green LED + diode (polarity +A1)  
6 = Standard AC: green LED + Varistor

**D: Special versions**  
0 = Standard

**Selecting features and options: only combinations in the same row are possible.**  
Preferred selections for best availability are shown in **bold**.

Type	Coil version	A	B	C	D
58.P3/P4/32/33/34	AC	<b>0 - 5</b>	0	<b>6</b>	0
58.P3/P4/32/33/34	DC	<b>0 - 5</b>	0	<b>5</b>	0

### Ordering information IECEx, ATEX and Hazardous Location versions

Example: 58 series, 35 mm rail (EN 60715), Box clamp terminal interface module, 4 CO, 120 V AC, green LED, mechanical indicator, ATEX and HazLoc Version.

Series — 5 8 . 3 4 . 8 . 1 2 0 . 0 0 4 9

**Type**  
3 = Box clamp  
35 mm rail (EN 60715) mount  
P = Push-in terminals  
35 mm rail (EN 60715) mount

**No. of poles**  
2 = 2 pole, 10 A  
3 = 3 pole, 8.5 A  
4 = 4 pole, 6 A

**Coil version**  
8 = AC (50/60 Hz)  
9 = DC

**Coil voltage**  
See coil specifications

**A: Contact material**  
0 = AgNi Standard  
5 = AgNi + Au

**B: Contact circuit**  
0 = CO (nPDT)

**D: Special versions**  
8 = IECEx, ATEX (Ex ec nC) and HazLoc Class I Div. 2 compliant without mechanical indicator  
9 = IECEx, ATEX (Ex ec nC) and HazLoc Class I Div. 2 compliant with mechanical indicator (only for 58.x2 and 58.x4)

**C: Options (Not for 58.Px version)**  
0 = Without module (only for 58.Px)  
4 = Module 99 LED (AC/DC)  
5 = Module 99 LED + Diode (DC)  
6 = Module 99 LED + Varistor (AC/DC)  
8 = Timer 86.30 (12 - 24 V AC/DC)

**Selecting features and options: only combinations in the same row are possible.**

Type	Coil version	A	B	C	D
58.3x	AC/DC	0 - 5	0	4 - 5 - 6 - 8	8 - 9
58.Px	AC/DC	0 - 5	0	0	8 - 9

## Technical data

Insulation						
Insulation according to EN 61810-1	insulation rated voltage	V	400 (2-3 pole)	250 (4 pole)		
	rated impulse withstand voltage	kV	3.6 (2-3 pole)	2.5 (4 pole)		
	pollution degree		2	2		
	overvoltage category		III	II		
Insulation between coil and contacts (1.2/50 µs)		kV	3.6			
Dielectric strength between open contacts		V AC	1000			
Dielectric strength between adjacent contacts		V AC	2000 (58.32,58.33, 58.P3)	1550 (58.34, 58.P4)		
Insulation between coil terminals						
Rated impulse voltage (surge) differential mode (according to EN 61000-4-5)		kV (1.2/50 µs)	4			
Other data						
Bounce time: NO/NC		ms	1/3			
Vibration resistance (10...55)Hz: NO/NC		g	6/6			
Power lost to the environment	without contact current	W	1			
	with rated current	W	3 (58.32, 58.34, 58.P4)	4 (58.P3, 58.33)		
			<b>58.32/33/34 (Box clamp)</b>	<b>58.P3/P4 (Push-in terminals)</b>		
Wire strip length		mm	8			
Screw torque		Nm	0.5			
Min. wire size		solid cable	stranded cable	solid cable	stranded cable	
		mm <sup>2</sup>	0.5	0.5	0.5	0.5
Max. wire size		AWG	21	21	21	21
		mm <sup>2</sup>	1 x 6 / 2 x 2.5	1 x 4 / 2 x 2.5	2 x 1.5 / 1 x 2.5	2 x 1.5 / 1 x 2.5
		AWG	1 x 10 / 2 x 14	1 x 12 / 2 x 14	2 x 16 / 1 x 14	2 x 16 / 1 x 14


B

## IECEx, ATEX - HazLoc - Electrical characteristics

Max current @ 70 °C (max temperature IECEx, ATEX applications)				
Type 58.x2	A	10		
Type 58.x3	A	8.5		
Type 58.x4	A	6		
Max current @ 40 °C (max temperature Hazloc applications)				
Type 58.x2	A	9		
Type 58.x3	A	7		
Type 58.x4	A	5		
Terminal				
Wire strip length		mm	8	
Screw torque		Nm	0.5	
Wire size		solid cable	stranded cable	
		mm <sup>2</sup>	1 x 2.5 / 2 x 1.5	1 x 2.5 / 2 x 1.5
		AWG	1 x 12 / 2 x 16	1 x 12 / 2 x 16

## Markings - IECEx - ATEX versions, II 3G Ex ec nC IIC Gc

MARKING	
	Specific marking of explosion protection
<b>II</b>	Component for surface plant (different from mines)
<b>3</b>	Category 3: normal level of protection
<b>GAS</b>	<b>G</b> Explosive atmosphere due to presence of combustible gas vapour or mist
	<b>Ex ec</b> Increased Safety
	<b>Ex nC</b> Sealed device (type of protection for category 3G)
	<b>IIC</b> Gas group
	<b>Gc</b> Equipment Protection Level

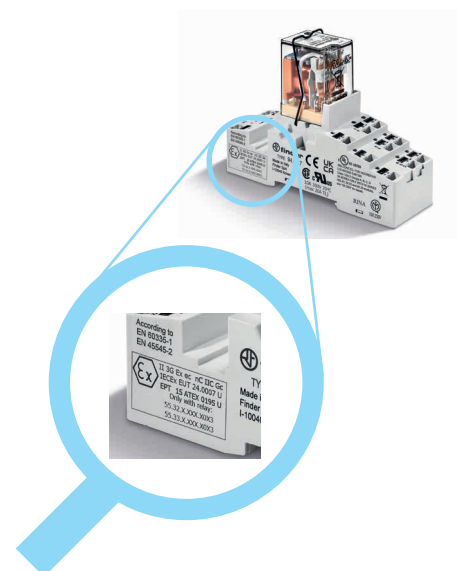

## Markings - Hazardous Location Class I Div. 2 Groups A, B, C, D - T5 and other data

HazLoc Class I Div. 2 Group A, B, C, D - T5		Meaning
Class I		Areas in which flammable gases and vapours may be present
Div. 2		Low probability to find ignitable hazardous concentration because it is typically present in closed system from which can escape through breakdown or accidental rupture
Group A, B, C, D		Kind of combustible, flammable gases and vapours can be in the atmosphere
Permissible Surface temperature		
T5	100 °C	212 °F

## IECEx - ATEX and HazLoc - Electrical characteristics and ambient temperature of work


Interface Code	IECEx-ATEX current [A] rating -40...+70 °C (Service Temperature 115°C)		HazLoc current [A] rating -25...40 °C group mounting	
	Single mounting	Group mounting	24 V DC	230 V AC
58.32.x.xxx	10	7	9	9
58.33.x.xxx	8.5	6	5	7
58.34.x.xxx	6	4	5	5
58.P2.x.xxx	10	7	9	9
58.P3.x.xxx	8.5	6	5	7
58.P4.x.xxx	6	4	5	5

If used with 86 modular timer, the ambient temperature range is -20...+50 °C




### Contact specification


**F 58 - Electrical life (AC) v contact current**  
2 & 3 pole relays

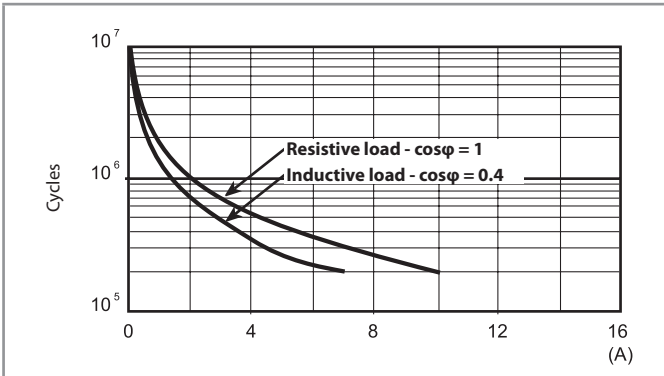

**F 58 - Electrical life (AC) v contact current**  
4 pole relay

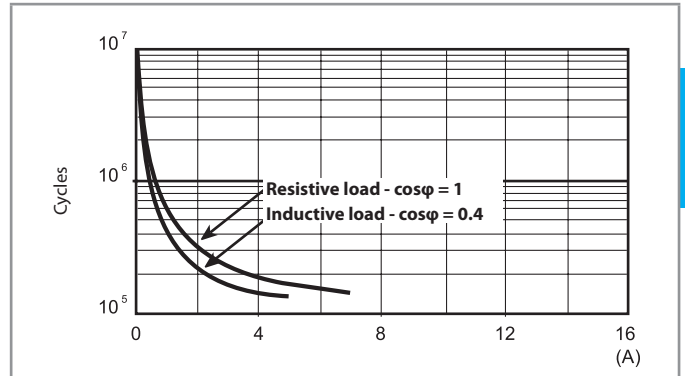

**H 58 - Maximum DC1 breaking capacity**

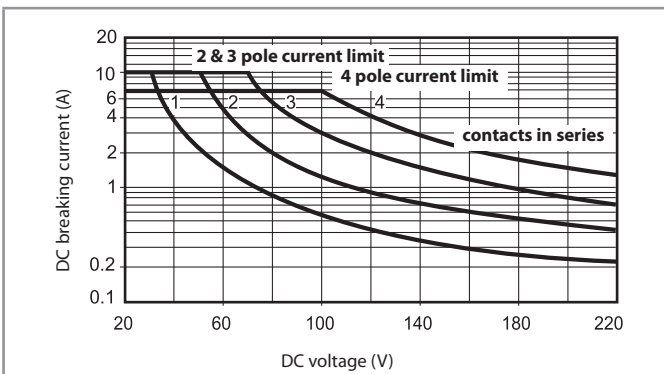

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of  $\geq 100 \cdot 10^3$  can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.  
Note: the release time for the load will be increased.

### Coil specifications


**DC coil data**

Nominal voltage	Coil code	Operating range		Resistance	Rated coil absorption
		$U_{min}$	$U_{max}$		
$U_N$		V	V	R	I at $U_N$
V		V	V	$\Omega$	mA
12	9.012	9.6	13.2	140	86
24	9.024	19.2	26.4	600	40
48	9.048	38.4	52.8	2400	20
125	9.125	100	138	17300	7.2

**AC coil data**


Nominal voltage	Coil code	Operating range		Resistance	Rated coil absorption
		$U_{min}$	$U_{max}$		
$U_N$		V	V	R	I at $U_N$ (50 Hz)
V		V	V	$\Omega$	mA
12	8.012	9.6	13.2	50	97
24	8.024	19.2	26.4	190	53
48	8.048	38.4	52.8	770	25
110	8.110	88	121	4000	12.5
120	8.120	96	132	4700	12
230	8.230	184	253	17000	6

**R 58 - DC coil operating range v ambient temperature**

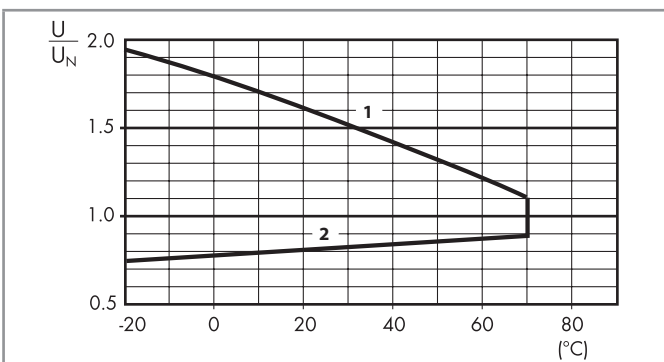

- 1 - Max. permitted coil voltage.  
2 - Min. pick-up voltage with coil at ambient temperature.

**R 58 - AC coil operating range v ambient temperature**

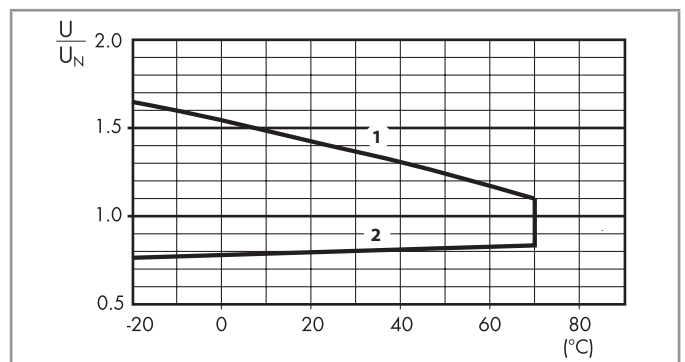

- 1 - Max. permitted coil voltage.  
2 - Min. pick-up voltage with coil at ambient temperature.


**Combinations**

Code	Type of socket	Type of relay	Module	Retaining clip
58.P3	94.P3	55.33	99.02	094.91.3
58.P4	94.P4	55.34	99.02	094.91.3
58.32	94.02	55.32	99.02	094.91.3
58.33	94.03	55.33	99.02	094.91.3
58.34	94.04	55.34	99.02	094.91.3


Certain relay/socket combinations

**B Outline drawings**

Type 58.32/58.33/58.34  
Box clamp

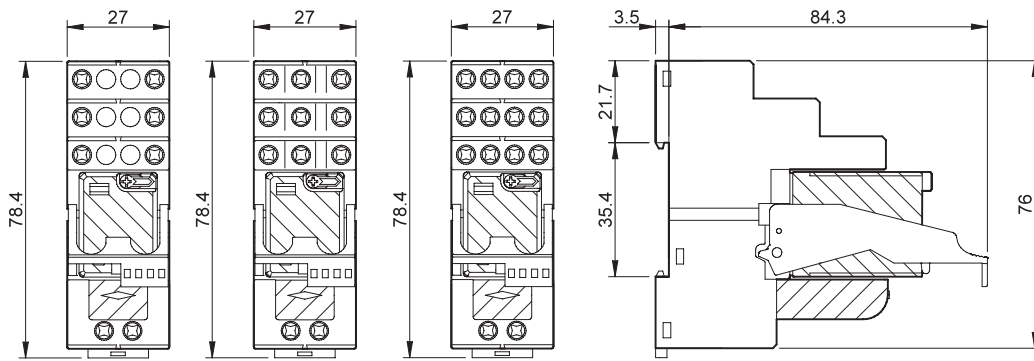

Type 58.P3/58.P4  
Push-in terminals

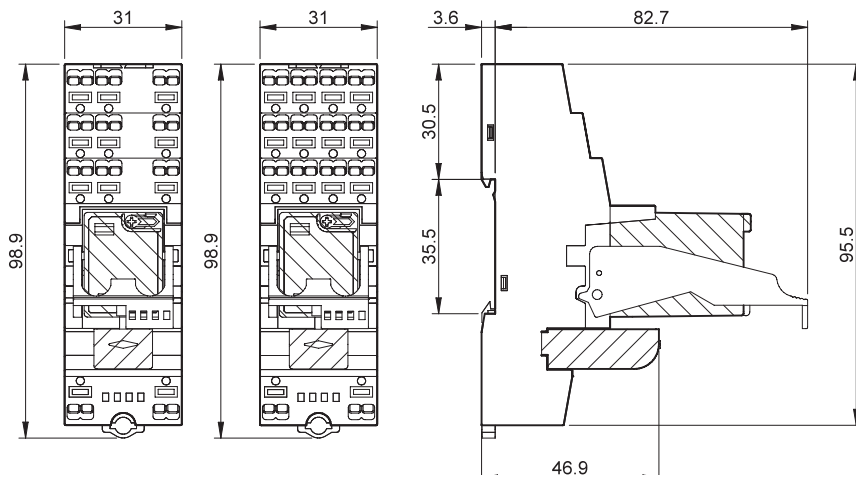


## Accessories




094.52.1

<b>2-way jumper link</b> for type 58.P3 and 58.P4	094.52.1
Rated values	10 A - 250 V





097.52

<b>2-way jumper link</b> for type 58.P3 and 58.P4	097.52
Rated values	10 A - 250 V





097.00

<b>Marker tag holder</b> for type 58.P3, 58.P4, 58.32, 58.33 and 58.34	097.00
--	--------





094.06

<b>6-way jumper link</b> for type 58.32, 58.33, 58.34	094.06 (blue)	094.06.0 (black)
Rated values	10 A - 250 V	

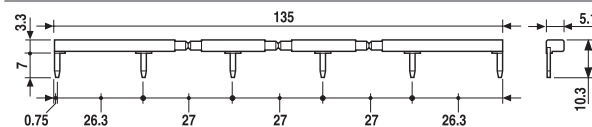

094.56

<b>6-way jumper link</b> for type 58.P3 and 58.P4	094.56 (blue)
Rated values	10 A - 250 V

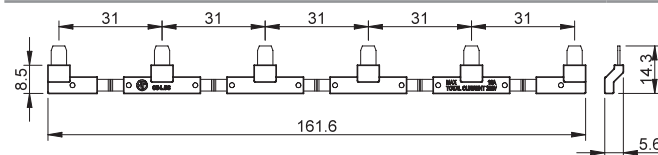

060.48

<b>Sheet of marker tags, plastic, 48 tags, 6 x 12 mm</b>	060.48
--	--------

## Packaging codes

How to code and identify retaining clip and packaging options for sockets.

Example:

5 8 . P 4 . 9 . 0 2 4 . 0 0 5 0 S P A

**A** Standard packaging  
**B** Blister packaging

**SP** Plastic retaining clip  
**SM** Metallic retaining clip (58.P2/P3/P4/32/34) ATEX, HazLoc, IECEx versions only

