




Connectors > Automotive Connectors > Automotive Housings > MQS, CONNECTOR HOUSING

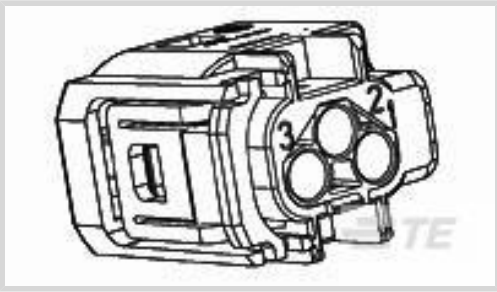

Connector System: **Wire-to-Wire**

Number of Positions: **3**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **6.2 mm [ .244 in ]**

Sealable: **Yes**

[All MQS, CONNECTOR HOUSING \(437\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	On the Terminal

Configuration Features

Number of Positions	3
Number of Rows	2

Electrical Characteristics

Nominal Voltage Architecture	50 V
------------------------------	------

Body Features

Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	A

Contact Features

--	--



Contact Size	.63mm
Contact Type	Receptacle
Mating Tab Width	.63 mm[.025 in]
Contact Current Rating (Max)	7.5 A

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	6.2 mm[.244 in]

Dimensions

Connector Height	15.3 mm[.602 in]
Product Width	24.2 mm[.953 in]
Product Length	20 mm[.787 in]
Row-to-Row Spacing	2.54 mm[.1 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Degree of Protection	IPX9K
----------------------	-------

Packaging Features

Packaging Method	Bag
------------------	-----

Other

Serviceable	No
Connector Position Assurance Capable	No



Product Compliance


For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.11% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.11% in Component Part) Decamethylcyclopentasiloxane (D5) (.11% in Component Part) <b>Article Safe Usage Statements:</b> Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

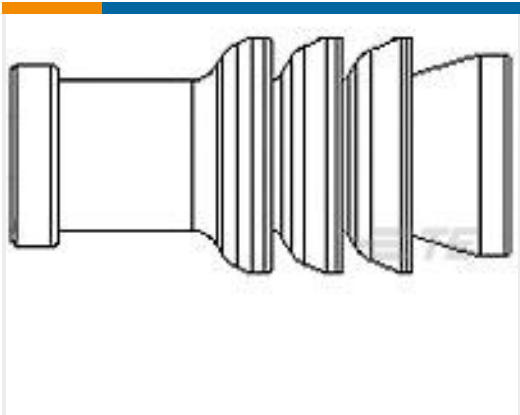

TE Part # 967056-1  
MQS BLINDSTOPFEN4MM

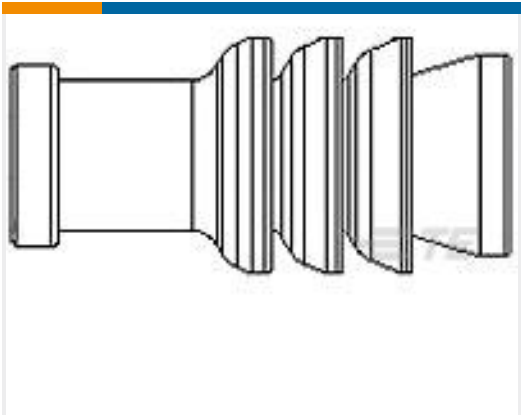

TE Part # 967067-1  
MQS SGL WIRE SEAL

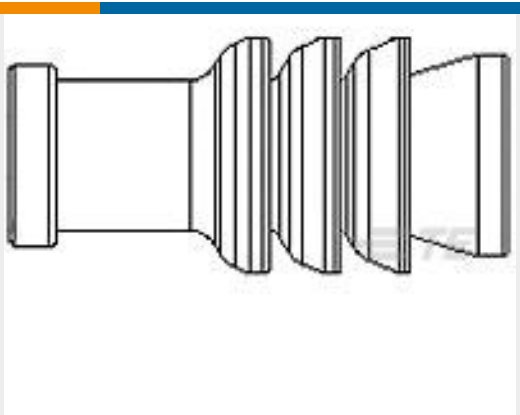

TE Part # 967067-2  
MQS EINZELLEITDICHT



TE Part # 1-967167-6  
3POS MQS TAB SEALED COD A



TE Part # CAT-M8793-T273  
MQS, RECEPTACLE AND TAB



TE Part # 2-967167-6  
MQS ST-GEH ASSY 3P




TE Part # 936459-2  
MQS 3P COVER HSG



TE Part # 968401-1  
MQS2.KONT-SICHERUNG


Also in the Series | MQS




Automotive Connector Caps & Covers  
(111)




Automotive Connector EMC Shielding  
(3)

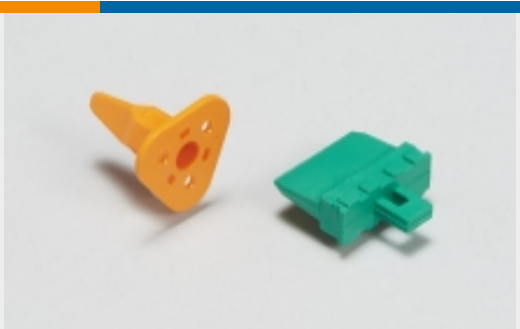


Automotive Connector Locks &  
Position Assurance(27)




Automotive Housings(375)




Automotive Terminals(89)



Connector Seals & Cavity Plugs(26)



Insertion & Extraction Tools(42)



Other Automotive Connector  
Accessories(7)



PCB Headers & Receptacles(143)

Customers Also Bought





TE Part #1897659-1  
250 FASTON REC CONT



TE Part #1-1897551-1  
025/090 HYB 56P CAP ASSY(TH)



TE Part #2177790-1  
CABLE FIXATION,TE,COVER INLET



TE Part #2367826-4  
84POS,0.5 SERIES,REC HSG ASSY,SLD



TE Part #2367837-1  
REC CONN CVR ASSY,84POS,0.5 SERIES,TYPE2



TE Part #9-2177814-2  
PIN DIA 3.0, PP

TE Part #2338925-1  
FUSE+REL BOX ASSY HARD WIRED LIUQI 2020



TE Part #2371133-5  
DFLZM SX5G VW AKII PIGTAIL

TE Part #9-2177810-1  
PIN DIA 6.0, L/N, ASSY



TE Part #9465854003  
RNF-3000-NR552-0-SP

Documents

Product Drawings

3POS MQS REC SEALED COD A

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_1-967642-1\_F.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-967642-1\_F.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-967642-1\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages





Micro Quadlok Interconnection System (MQS)

English

Product Specifications

Application Specification

English