


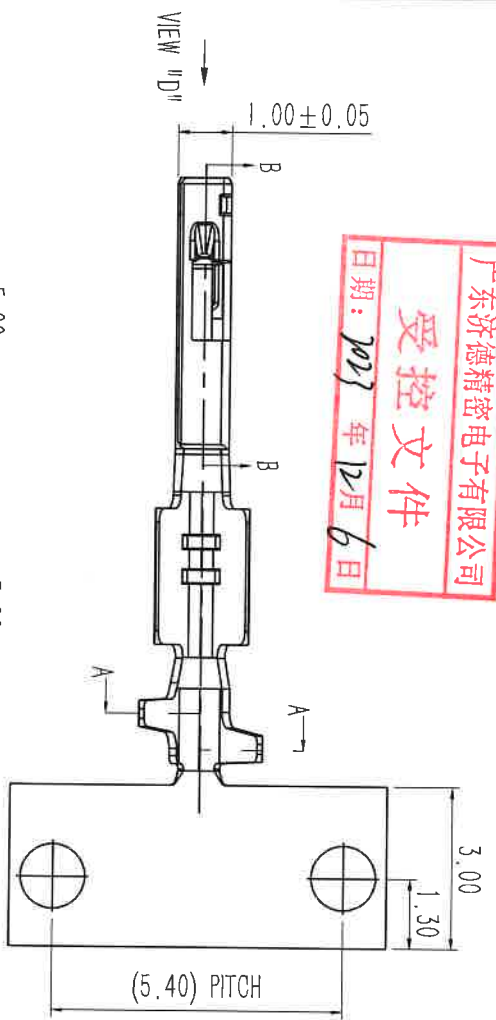

NOTES:

1. Material/材质: Copper Alloy/铜合金, T=0.15mm;
2. Finish/表面处理: See Notes-6/见附注-6;
3. Wire Size Range/线规: See table-1/见表-1;
4. Contact surface should not have burrs, Other areas burr 0.10mm Max. 端子接触面不能有毛刺, 其他区域毛刺不能超过0.10mm;
5. Harmful material please follow RoHS/产品需符合RoHS标准;
6. Order Information/编码原则: 922-050-X14X




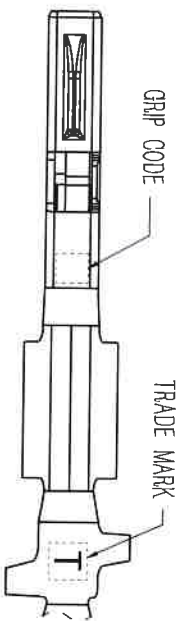



Table-1

P/N	C	D	E	F	J	K	G	H	P	L	Wire Size Range /适用铜线径	O.D./外径
922-050-1141	1.65	1.65	2.35	2.35	0.40	0.68	2.5	2.2	1.1	0.15	0.35mm ²	φ1.40mm
922-050-5141	1.65	1.65	2.35	2.35	0.40	0.68	2.5	2.2	1.1	0.15	0.35mm ²	φ1.40mm
922-050-1142	1.32	1.32	1.90	1.90	0.24	0.41	2.5	2.2	1.1	0.00	0.13mm ²	φ1.05 mm
922-050-5142	1.32	1.32	1.90	1.90	0.24	0.41	2.5	2.2	1.1	0.00	0.13mm ²	φ1.05 mm
922-050-1143	1.65	1.65	2.25	2.25	0.45	0.47	2.0	2.4	1.4	0.00	0.22mm ²	φ1.05 mm
922-050-5143	1.65	1.65	2.25	2.25	0.45	0.47	2.0	2.4	1.4	0.00	0.22mm ²	φ1.05 mm


SECTION B-B

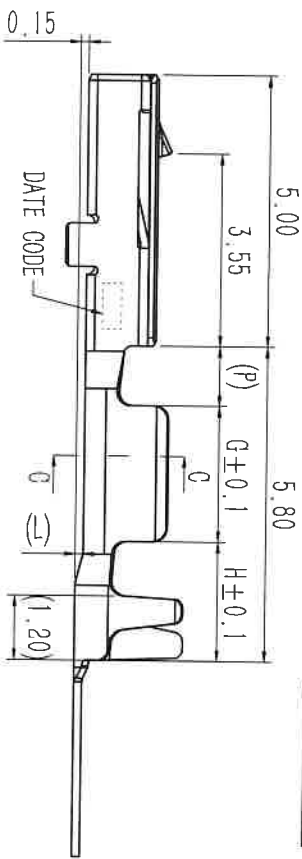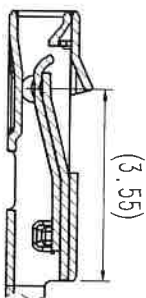

SECTION C-C



SECTION A-A



Guangdong Jide Precision Electronics Co., Ltd
广东济德精密电子有限公司

0.50mm UNSEALED FEMALE TERMINAL

922-050-X14X

APD: Jerry

DWG NO:

CHKD: Ray

C-922-050-X14X

DRAW: Colmyle



SCALE: N/A

SHEET: 1/1

REV: A0