




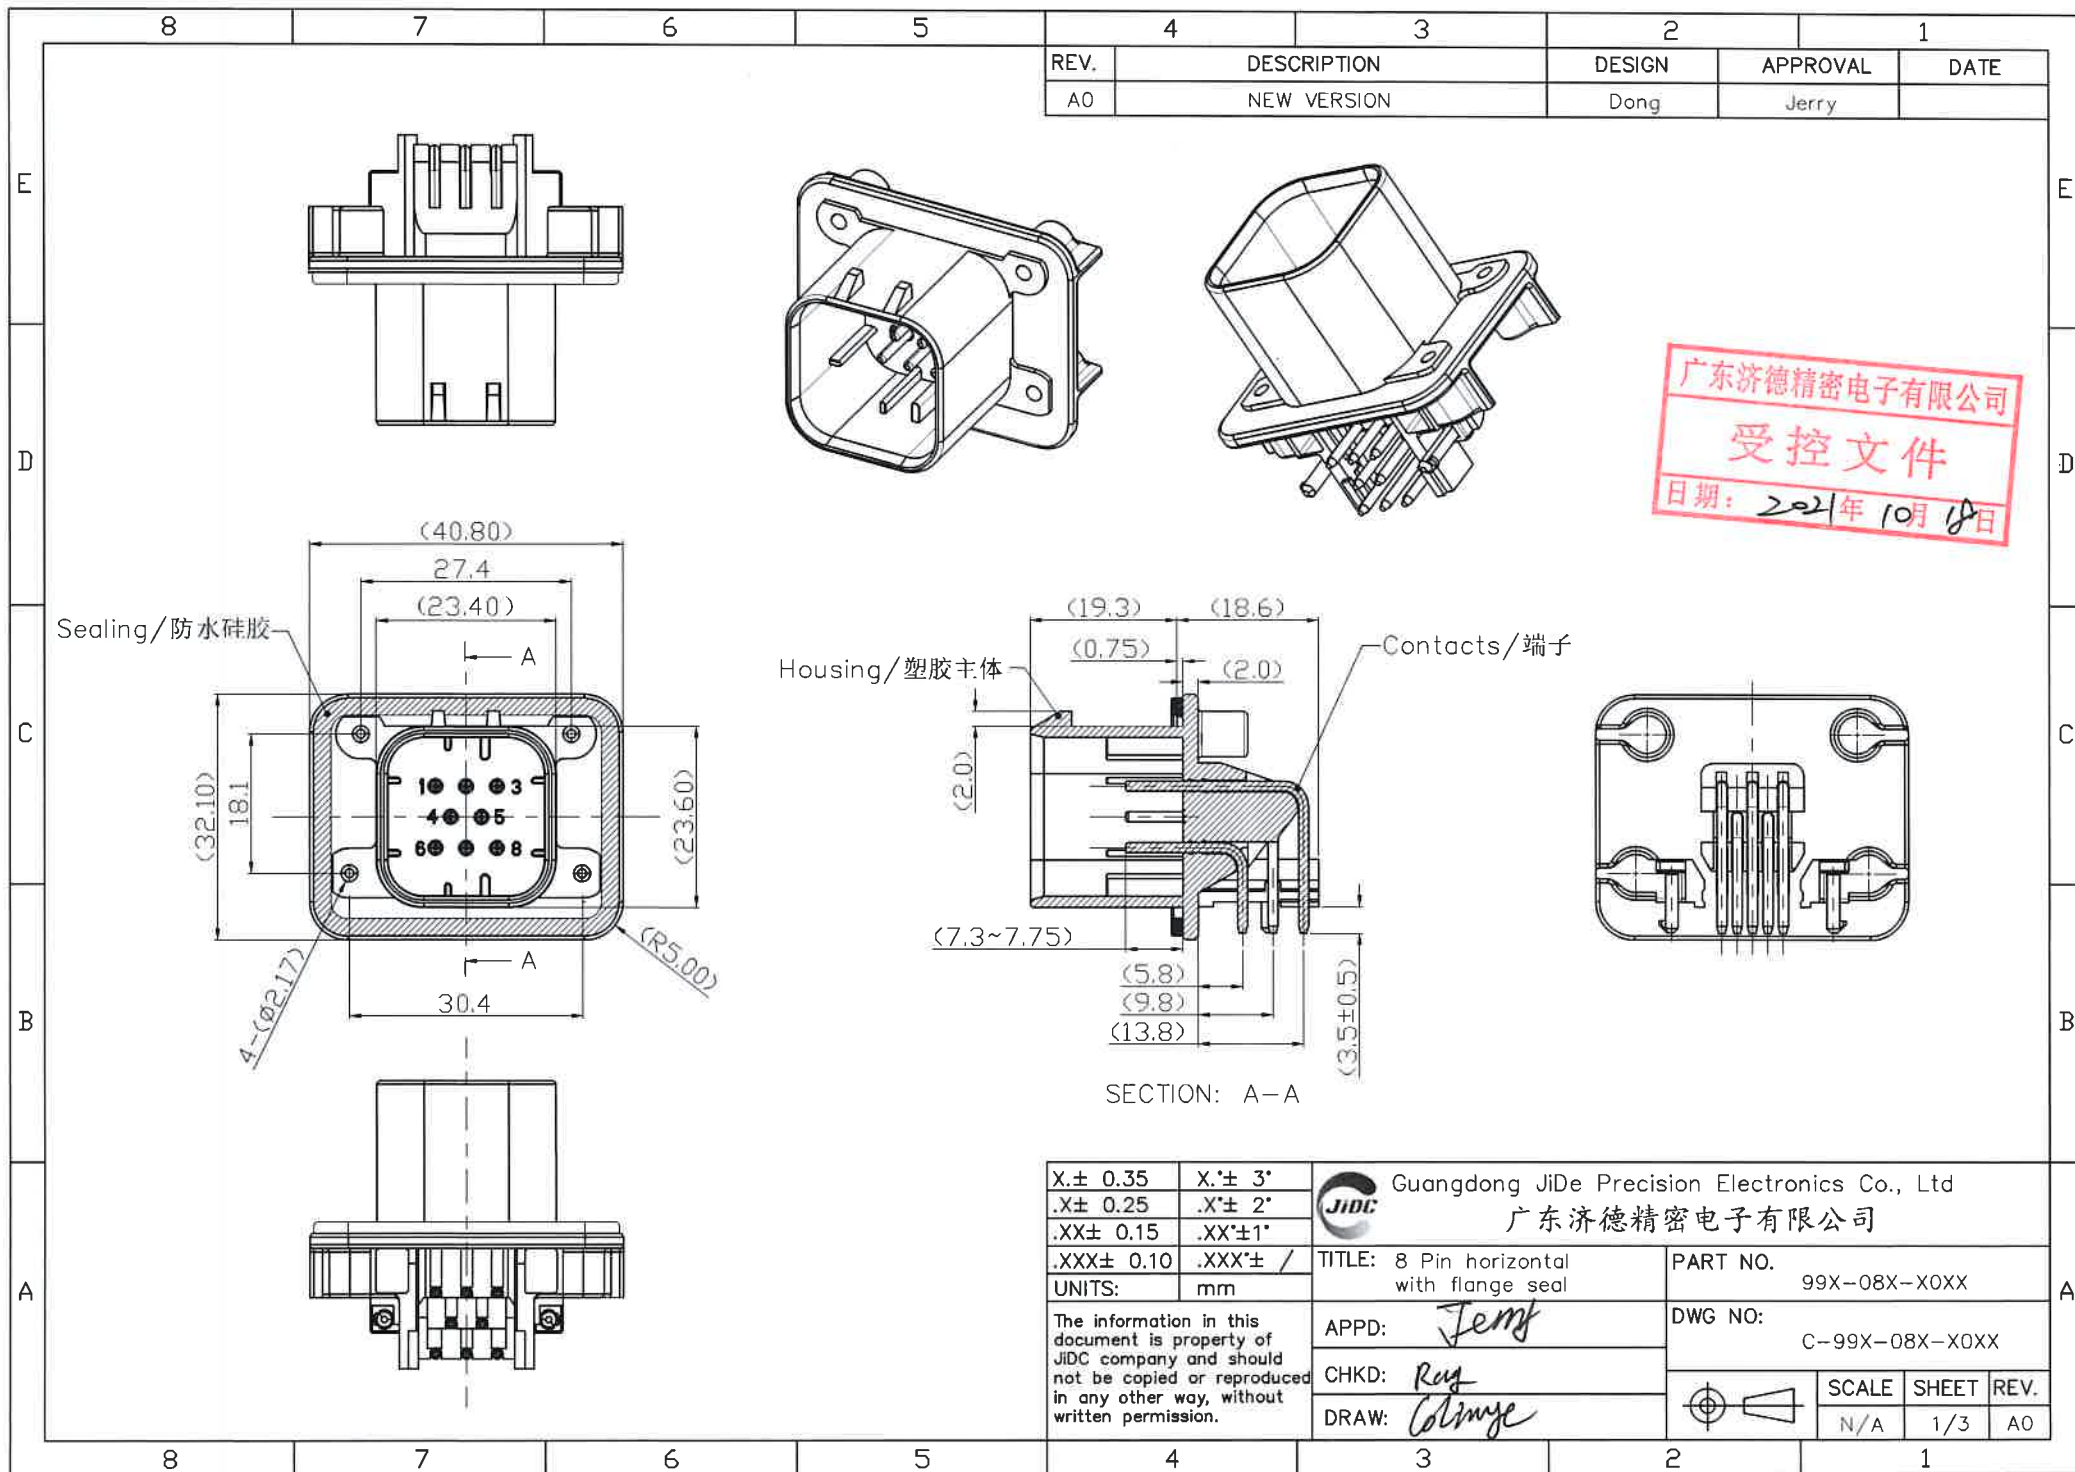


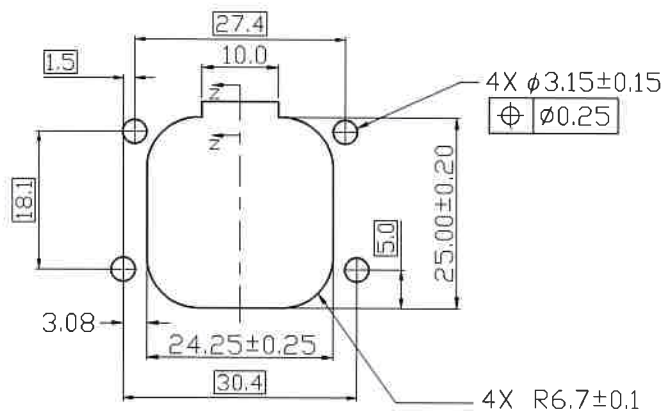


Mounting panel size
(maximum gauge 5.0mm)
/安装面板尺寸(最大厚度5.0mm)




99X-08X-2003




99X-08X-7066

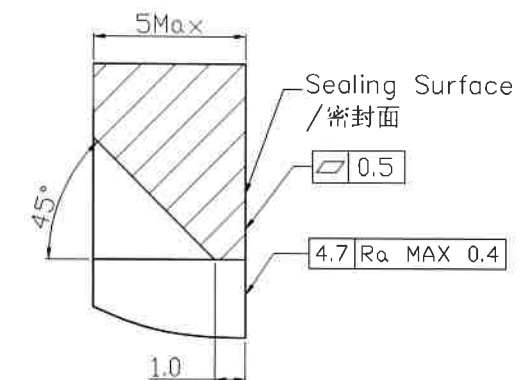

Section/截面 Z-Z
Optional Construction IF Panel
Thickness Is Greater Than 2.0
/厚度大于2.0(可选)
Scale/比例: 4: 1

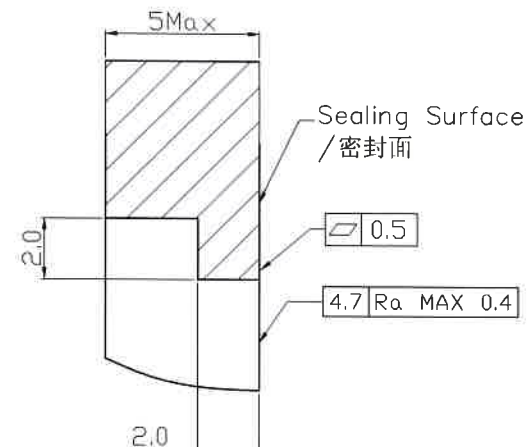


Section/截面 Z-Z
Optional Construction IF Panel
Thickness Is Greater Than 2.0
/厚度大于2.0(可选)
Scale/比例: 4: 1

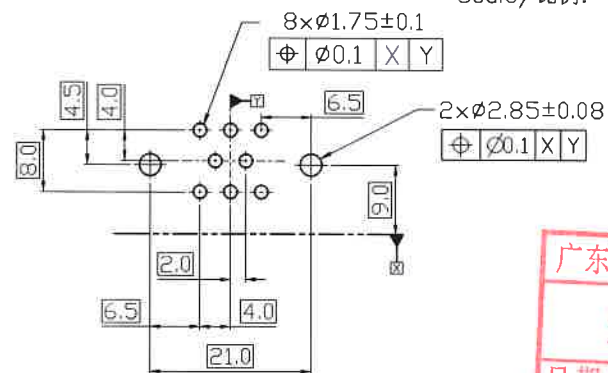




PCB LAYOUT

广东济德精密电子有限公司
受控文件
日期: 2021 年 10 月 18 日

.X± 0.35	.X'± 3'	 Guangdong JiDe Precision Electronics Co., Ltd 广东济德精密电子有限公司								
.X± 0.25	.X'± 2'									
.XX± 0.15	.XX'± 1'									
.XXX± 0.10	.XXX'± /									
UNITS:	mm									
The information in this document is property of JIDC company and should not be copied or reproduced in any other way, without written permission.		TITLE: 8 Pin horizontal with flange seal	PART NO. 99X-08X-X0XX							
		APPD: 	DWG NO: C-99X-08X-X0XX							
		CHKD: 	 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>N/A</td><td>2/3</td><td>A0</td></tr></table>		SCALE	SHEET	REV.	N/A	2/3	A0
		SCALE			SHEET	REV.				
N/A	2/3	A0								
DRAW: 										

Product specification/物料规格表:




NO	Part number (With seal)	Part number (Without seal)	Color	Plating
1	992-081-2003	991-081-2066	Black	Tin
2	992-083-2003	991-083-2066		Gold
3	992-081-7066	991-081-7066	Natural	Tin
4	992-083-7066	991-083-7066		Gold

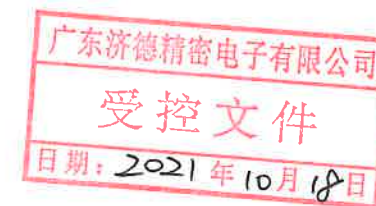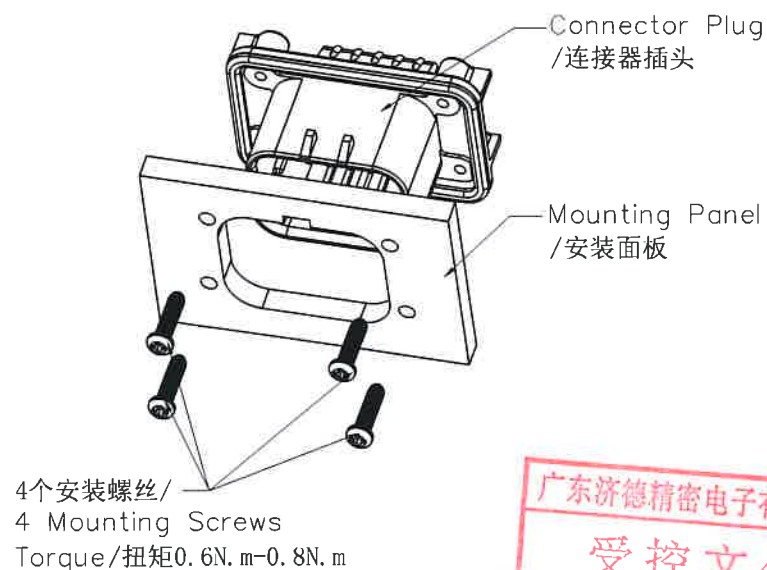

Flat Panel Mounting
/ 面板安装平整

NOTES:

- Material/材质:
Housing/塑胶主体: PBT, UL94 V-0
Contacts/端子: Copper alloy/铜合金, Tin or gold plated/镀锡或镀金
- Rated current/额定电流: 8A (Tin/镀锡); 17A (Au/镀金);
- Rated voltage/额定电压: 250V AC
- Operating temperature/操作温度: -40°C~+105°C (Tin/镀锡);
-40°C~+125°C (Au/镀金);
- Insulation voltage/耐压: 1000V AC/minute,
- Insulation Resistance/绝缘阻抗: 100MΩ (Min.)
- Contact resistance/接触电阻: 10mΩ (Max.)
- Mounting screws are 3.0 self-tapping screws with torque range 0.6N.m-0.8N.m/安装螺钉采用3.0自攻螺丝, 扭矩范围0.6N.m-0.8N.m
- The product must meet the requirements of RoHS.
/产品符合RoHS环保要求.

X.± 0.35	X.± 3'		Guangdong JiDe Precision Electronics Co., Ltd					
.X± 0.25	.X'± 2'		广东济德精密电子有限公司					
.XX± 0.15	.XX'±1"							
.XXX± 0.10	.XXX'± /							
UNITS:	mm							
The information in this document is property of JiDe company and should not be copied or reproduced in any other way, without written permission.			TITLE: 8 Pin horizontal with flange seal		PART NO. 99X-08X-X0XX			
			APPD: 		DWG NO: C-99X-08X-X0XX			
			CHKD: 			SCALE	SHEET	REV.
			DRAW: 			N/A	3/3	A0