

Miniature Snap Switch

Single Pole

D4 Series



Features

- Choice of standard or light operating force
- Long life coil spring mechanism
- RoHS compliant
- Cadmium free
- Various aux actuators
- Various terminal types
- Agency approved extended life versions available

Standard Parts¹ (note "G2" suffix does not affect fit, form or function)

D413-R1AA	D429-R1TD	D433-R1AA	D443-R1LD	D449-R1LL	D453-R1RA
D413-R1LA	D429-R1AA	D433-R1LD	D443-R1MD	D449-R1MD	D453-R1RD
D413-R1LD	D429-R1LD	D433-R1RA	D443-R1RA	D449-R1ML	D459-R1AA
D413-R1RA	D429-R1LL	D433-R1RD	D443-R1RD	D449-R1RA	D459-R1LD
D419-R1AA	D429-R1MD	D439-R1LL	D449-R1AA	D449-R1RD	D459-R1LL
D423-R1RA	D429-R1ML	D439-V1ML	D449-R1LD	D453-B8AA	D459-R1ML
D423-R1RD		D443-R1AA		D453-R1AA	

¹The part number configuration matrix below provides details to the part numbers above.

For configurable part numbers that are not listed above, not listed in your region, or for custom part numbers, contact the factory or your distributor. For information on crossing discontinued U.S. only part numbers, see D4 cross-reference chart at www.switches-sensors.zf.com.

Part Number Breakdown

D413-R1AA

Series	Contact Rating ²	Configuration ³										
D4	1	0.1 A	85 °C					125 °C			150 °C	
	2	3 A	1	SPST – NO	Standard Op. Force "Y"	G	SPST – NO	S	SPST – NO	Light Op. Force		
	3	5 A	2	SPST – NC		H	SPST – NC	T	SPST – NC			
	4	10 A	3	SPDT		M	SPDT	U	SPDT			
	5	15 A	7	SPST – NO	Light Op. Force "X"	N	SPST – NO					
	8	21 A	8	SPST – NC		P	SPST – NC					
		9	SPDT	R		SPDT						

²UL AC current rating; see table on reverse for complete details

³D48 only available with light operating force

Terminal Type mm (inches)

A1	Welding	R1	4.8 x 0.5 (0.187 x 0.020) QC, straight*
B8	Short solder	R3	4.8 x 0.5 (0.187 x 0.020) QC, dog leg**
P4	1.2 x 0.5 (0.047 x 0.020) PCB, underside*	S1	Solder with temp stop
P5	1.2 x 0.5 (0.047 x 0.020) PCB, rear*	V1	6.3 x 0.8 (0.250 x 0.032) QC, straight
PA	1.2 x 0.5 (0.047 x 0.020) PCB, housing side*	V3	6.3 x 0.8 (0.250 x 0.032) QC, dog leg
PB	1.2 x 0.5 (0.047 x 0.020) PCB, cover side*	W9	Screw*
Q1	4.8 x 0.8 (0.187 x 0.032) QC, straight*	X5	1.5 x 0.8 (0.059 x 0.032) QC, 2.5 mm grid
Q3	4.8 x 0.8 (0.187 x 0.032) QC, dog leg*	Y5	6.3 x 0.8 (0.250 x 0.032) QC, 5 mm grid

*not available for D48

**not available for D45 or D48

Actuator Type mm (inches)

Actuation length			Actuation length		
AA	Button	N/A	MA	Lever, high ratio	25.7 (1.01)
JA	SS lever, standard ratio	21.2 (0.835)	MD	Lever, high ratio	40.1 (1.58)
JD	SS lever, standard ratio	35.6 (1.4)	ML	Lever, high ratio	74.4 (2.93)
JL	SS lever, standard ratio	69.9 (2.75)	RA	Roller, standard ratio	20.6 (0.811)
KA	SS lever, high ratio	25.7 (1.01)	RD	Roller, standard ratio	34.1 (1.34)
KD	SS lever, high ratio	40.1 (1.58)	SA	Roller, simulated, rear mount	20.6 (0.811)
KL	SS lever, high ratio	74.4 (2.93)	TA	Roller, high ratio	25.1 (0.988)
LA	Lever, standard ratio	21.2 (0.835)	TD	Roller, high ratio	38.6 (1.52)
LD	Lever, standard ratio	35.6 (1.4)	UA	Roller, simulated, front mount	25.1 (0.988)
LL	Lever, standard ratio	69.9 (2.75)			

For actuator details, see D4 actuator reference sheet at <http://switches-sensors.zf.com/us/>

www.switches-sensors.zf.com ZF Electronics Systems Pleasant Prairie, LLC ("ZF") acquired the rights to the CHERRY branded switches and sensors in 2008. Although ZF divested its interest in the CHERRY name in 2015, the switches and sensors remain unchanged and are now sold under the ZF brand.

Page 1 of 2, Last update 2019-07-19, Specifications subject to change without notice.



Electrical Specifications – Contact Ratings

Contact	EN61058 ⁴	UL1054
1	0.1 (0.5) A, 250 VAC; 0.5 A, 30 VDC	0.1 A, 125/250 VAC; 0.5 A, 30 VDC
2	3 (1) A, 250 VAC	3 A, 125/250 VAC; 1/10 HP, 250 VAC
3	6 (2) A, 250 VAC	5 A, 125/250 VAC; 1/4 HP, 250 VAC
4	10 (3) A, 250 VAC	10 A, 125/250 VAC; 6 A, 30 VDC; 1/2 HP, 125/250 VAC
5	16 (4) A, 250 VAC	15 A, 125/250 VAC; 1/2 HP, 125-250 VAC
8	21 (8) A, 250 VAC	21 A, 250 VAC; 1 HP, 125 VAC; 2 HP, 250 VAC

UL file number E314201

⁴D45 with R1 terminals are not 61508 certified

Environmental and Mechanical Specifications

Operating Temperature	-40 °C to 85, 125 or 150 °C (-40 °F to 185, 257 or 302 °F)	
Flammability Rating	UL 94V-0	
Operating life – electrical life at rated load, 85 °C		
Contact	EN61058	UL1054 ⁵
1	50,000	6,000
2	50,000	6,000
3	50,000	6,000
4	50,000	6,000
5	50,000	6,000
7	10,000	6,000

⁵Extended life available


Material Specifications

Case	Polyamide (PA) 85 °C, Thermoplastic Polyester (PET) 125 or 150 °C
Cover	Polyamide (PA) 85 °C, Thermoplastic Polyester (PET) 125 or 150 °C
Actuating Button	Thermoplastic Acetyl (POM) 85 °C, Thermoplastic Polyester (PET) 125 or 150 °C
Contacts	Gold Cross Point (D41), Silver (D42), Silver Alloy (D43-D48)
Terminals	Brass
Auxiliary Actuator	Stainless Steel or Cold-Rolled Steel (Nickel Plated)
Moving Blade	Silver Plated Brass

Environmental Specifications

Ambient Temperature	-40 °C to 85 °C/120 °C (-40 °F to 185 °F/248 °F)
Operating Force	45 – 400 cN (model dependent, without actuator)
Total Travel	1.6 mm
Ingress Protection	IP40

Dimensions mm (inches) and terminal configurations

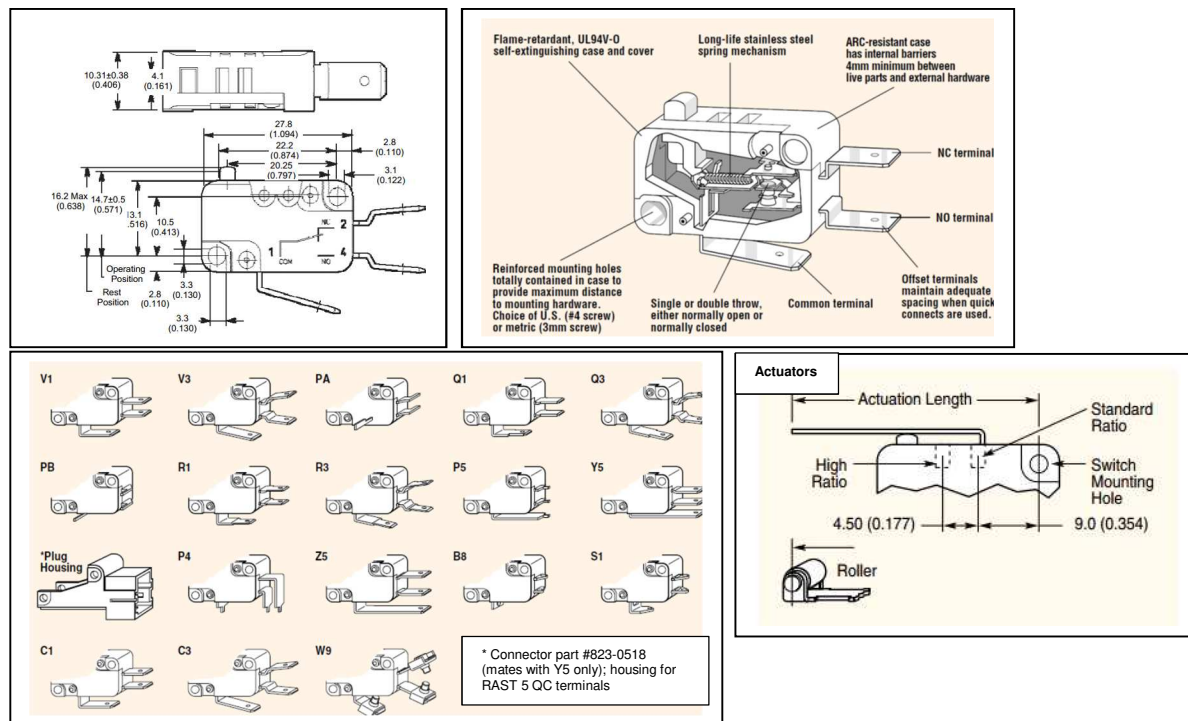

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ZF Electronics:

[D443-R1RD](#) [D433-R1RA-G2](#) [D413-R1LD](#) [D413-R1AA-G2](#) [D443-R1AA-G2](#) [D433-R1RD-G2](#) [D413-R1RA-G2](#)
[D443-R1RA-G2](#) [D453-R1RD-G2](#) [D439-V1ML-G2](#) [D413-R1LA-G2](#) [D459-R1ML-G2](#) [D449-R1RA-G2](#) [D449-R1ML-G2](#)
[D449-R1AA-G2](#) [D429-R1LD-G2](#) [D449-R1LD-G2](#) [D489-VGBH](#)